

Contactors and Contactor Assemblies

contents


Section Overview	2/2 - 2/5	SIRIUS Contactor Spare Parts	2/101 - 2/105
Product Overview	2/6 - 2/7	Coils	2/106
SIRIUS Contactors		Arc Chutes	2/106
3RT20, 3-pole to 95A	2/8	Contact Kits	2/106
3RT10, 3-pole to 500A	2/9		
3RT10, 3-pole to 500A with Integrated Safety	2/11 - 2/10	Obsolete Contactor / Relay Spare Parts	2/109 - 2/110
3RT12, 3-pole Vacuum to 500A	2/12		
3RT23, 4-pole with 4 NO	2/13	Design / Function Overview	
3RT24, 3-pole for Resistive Loads	2/15	3RT20 Contactors, S00 to S3	2/111 - 2/112
3RT25, 4-pole with 2 NO + 2 NC	2/18	3RT10 Contactors, S6 to S12	2/113 - 2/114
3RT26, for Capacitor Switching	2/25	WYE-Delta Starters	2/117 - 2/122
3RT20, Interface Coupling Contactors	2/26 - 2/27	3RH2 Control Relays	2/123
3RT20 Motor Contactors for DC Operation	2/22 - 2/24	3TF6 Vacuum Contactors up to 820A	2/124
3RH21 Contactor Relays	2/20 - 2/21	3RT / 3RH Accessories	2/125 - 2/127
3RA13 / 3RA23 Reversing Contactors	2/43 - 2/50		
3RT, 3TF Safety Contactors and		Technical Data	
3RH2, 3TH2 Safety Control Relays	2/28 - 2/29	3RT10 / 3RT20 Contactors	2/128 - 2/158
Function Modules for Communications	2/30 - 2/42	3RT12 Vacuum Contactors	2/134, 2/159 - 2/164
3RA24, Wye-Delta Starting	2/51 - 2/54	3RT24 Resistive Load Contactors	2/165 - 2/172
Contactor Coil Codes	2/55	3RT23 4-pole Contactors 4 NO	2/173 - 2/174
SIRIUS Control Relays & Coupling Relays		3RT25 4-pole Contactors 2 NO & 2 NC	2/175 - 2/176
3RH2 Control Relays	2/56	3RT26 Capacitor Switching Contactors	2/177
3RH24 Latched Control Relays	2/57	3RT20 Interface Relays	2/178
Auxiliary Switches	2/57	3TF6 Vacuum Contactors up to 820A	2/179 - 2/184
3RH21 Coupling Relays	2/58	3TC DC Switching Contactors	2/185 - 2/188
Special Application Contactors (3TF6 / 3TB5 / 3TC)		Accessories	2/189 - 2/191
3TF6 Vacuum Contactors up to 820A	2/59 - 2/60	3RH2 Control and Latching Relays	2/192 - 2/195
3TC DC Switching Contactors	2/61 - 2/62	3RH21 Coupling Relays	2/196
3TB5 Contactor Coils	2/107 - 2/108		
SIRIUS Contactor & Relay Accessories		Circuit Diagrams	
Overview	2/63 - 2/71	3RT Contactors & Accessories	2/197 - 2/205
Auxiliary Switches	2/72 - 2/75	3RA23 Reversing Contactors	2/206
Auxiliary Time Delay and Latching Blocks	2/76 - 2/77	WYE-Delta Starters	2/207
Surge and EMC Suppressors	2/79 - 2/80	3TF6 Vacuum Contactors up to 820A	2/208
Contactor Accessories	2/82 - 2/85	3RH2 Control & Latching Relays	2/210
Reversing Accessories	2/86 - 2/88	3RH21 Coupling Relays	2/209
Wye-delta Accessories	2/89		
NEMA 1 Enclosures	2/100	Position of Terminals	
SIRIUS Current Monitoring Relays		3RT Contactors and Accessories	2/210 - 2/214
3RR21 Basic Versions	2/91 - 2/94	3RT Capacitor Contactors	2/213
3RR22 Standard Versions	2/91 - 2/94	3TF6 Vacuum Contactors up to 820A	2/215
3RR24 with IO-Link	2/95 - 2/98	3RH2 Control Relays	2/210
Accessories	2/99		
Special Application Contactor Accessories		Dimensions	
Auxiliary Contacts	2/59	3RT, 3-pole Contactors S00 to S3	2/216 - 2/219
Box Terminals and Covers	2/60	3RT10, 3-pole Contactors S6 to S12	2/220 - 2/221
Surge Suppressors for 3TB, 3TC, 3TF	2/60	3RT24, 3-pole Contactors for Resistive Loads	2/220 - 2/221
		3RT10, Contactors S6 to S12, integrated safety	2/222
		3RT12, 3-pole Vacuum Contactors	2/223
		3RT23, 3RT25 4-pole Contactors	2/224
		3RT26, Contactors for Capacitor Switching	2/225
		3RA13 / 23 Reversing Contactors	2/226 - 2/228
		3TF6 Vacuum Contactors up to 820A	2/229
		Contactor Accessories	2/230 - 2/231
		3RH2 Control and Coupling Relays	2/232

Contactors and Contactor Assemblies

Contactors for switching three-phase motors

contents

Contactors for switching three-phase motors

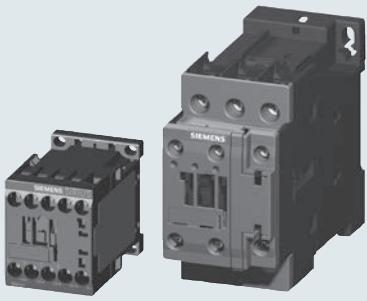

3RT20 contactors, 3-pole, 3 to 75 HP, Sizes S00 to S3
with screw, spring or ring lug connections

Page

Selection and ordering data

- AC/DC operation 2/8
- Accessories 2/72
- Spare parts 2/101

Description 2/111
Technical data 2/128
Internal circuit diagrams 2/197
Position of terminals 2/210
Dimension drawings 2/216



3RT10 contactors, 3-pole, 100 to 400 HP, sizes S6, S10 and S12

Page

Selection and ordering data

- AC/DC operation 2/11
- Accessories 2/72
- Spare parts 2/105

Description 2/113
Technical data 2/130
Internal circuit diagrams 2/203
Position of terminals 2/211
Dimension drawings 2/220



3RT20 NEMA labeled contactors, NEMA size 0 to 6

Page

Selection and ordering data

- AC/DC operation 2/8, 2/11
- Accessories 2/72
- Spare parts 2/101

Description 2/111
Technical data 2/128
Internal circuit diagrams 2/197
Position of terminals 2/210
Dimension drawings 2/216

Contactor assemblies for switching three-phase motors




3RT12 vacuum contactors, 3-pole, 150 to 400 HP, sizes S10 and S12

Page

Selection and ordering data

- AC/DC operation 2/12
- Accessories 2/72
- Spare parts 2/105

Description 2/113
Technical data 2/159
Internal circuit diagrams 2/203
Position of terminals 2/211
Dimension drawings 2/223




3RA13 / 23 contactor assemblies for reversing, 3 to 75 HP, sizes S00 to S3
with screw or spring loaded connections

Page

Selection and ordering data

- AC/DC operation 2/46
- Accessories 2/86
- Spare parts 2/101

Overview 2/44
Description 2/43
Circuit diagrams 2/206
Position of terminals 2/211
Dimension drawings 2/226

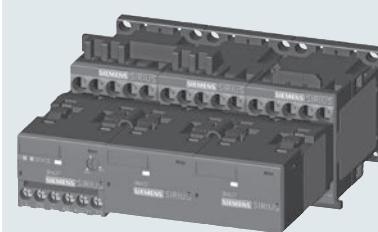

Wye Delta for customer assembly of sizes S00 to S12

Page

Selection and ordering data

- For wye-delta starting 2/53
- Accessories 2/89
- Spare parts 2/101

Overview 2/115
Description 2/117
Circuit diagrams 2/207

Contactors and Contactor Assemblies

Contactors for special applications

contents

Contactors for special applications

2

CONTACTORS AND ASSEMBLIES




**3RT14 / 24 contactors,
 $I_e/AC-1$: 140 to 690 A,
3-pole, sizes S3 to S12,
with screw connections**

Page

Selection and ordering data

- AC/DC operation 2/15
- Accessories 2/72
- Spare parts 2/104

Descriptions 2/15
Technical Data 2/165
Internal circuit diagrams 2/203
Position of terminals 2/211
Dimension drawings 2/218

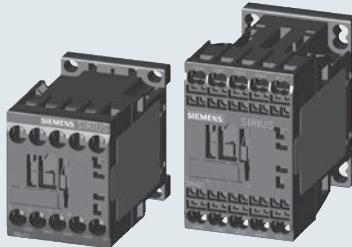


**3RT23 contactors,
AC-1: 18 to 140 A with 4 NO main
contacts, sizes S00 to S3**
with screw or spring connections

Page

Selection and ordering data

- AC/DC operation 2/13
- Accessories 2/72
- Spare parts 2/101

Description 2/13
Technical Data 2/173
Internal circuit diagrams 2/198
Position of terminals 2/214
Dimension drawings 2/224



**3RT25 contactors,
AC-3: 7.5-25 HP with 2 NO + 2 NC
main contacts, sizes S00 to S2**
with screw or spring connections

Page

Selection and ordering data

- AC/DC operation 2/18
- Accessories 2/72
- Spare parts 2/101

Description 2/18
Technical Data 2/175
Internal circuit diagrams 2/197
Position of terminals 2/210
Dimension drawings 2/224



**3RT26 capacitor
contactors, up to 75 kvar,
sizes S00 to S2**

with screw connections

Page

Selection and ordering data

- AC/DC operation 2/25
- Accessories 2/72
- Spare parts 2/103

Descriptions 2/15
Technical Data 2/177
Internal circuit diagrams 2/197
Position of terminals 2/213
Dimension drawings 2/225



**3RT20 coupling relays up to 20 HP
(interface,) 3-pole, for switching
motors, sizes S00 and S0**


with screw or spring connections

Page

Selection and ordering data

- DC operation 2/26
- Accessories 2/72
- Spare parts 2/101

Description 2/26
Technical Data 2/178
Internal circuit diagrams 2/197
Position of terminals 2/210
Dimension drawings 2/216

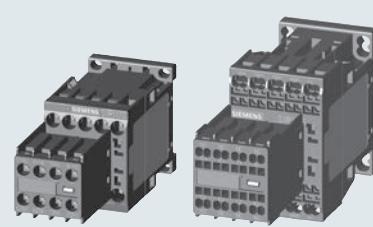

**3RT Safety Contactors and
3RH Safety Control Relays**

Page

Selection and ordering data

- Safety with standard devices 2/28
- Safety with permanently
mounted auxiliaries 2/29
- Accessories 2/79

Description 2/28
Technical Data 2/128



Contactors and Contactor Assemblies

Contactors for special application

2


CONTACTORS AND ASSEMBLIES

contents

Contactors for special applications



3TF68 and 3TF69 vacuum contactors, 500 to 700 HP; contactor assemblies



3TB50 to 3TB56 contactors with DC solenoid system, 100 to 300 HP



3TC Contactors

	Page
Selection and ordering data	
• AC/DC operation	2/59
• Accessories	2/59
• Spare parts	2/59
Descriptions	2/124
Technical Data	2/179
Internal circuit diagrams	2/208
Position of terminals	2/215
Dimension drawings	2/229

	Page
Selection and ordering data	
• Spare parts	2/108

	Page
Selection and ordering data	
• DC operation	2/61
• Spare parts	2/61
Technical Data	2/185

3RT1 SIRIUS Nomenclature

3RT1	0	3	5	1	A	B0	1
SIRIUS Contactor	Application	Frame	Current	Terminal	Coil Type	Coil Voltage	Aux Contacts A)
0 = 3 pole Standard	5 = S6	Designation	2 = Spring Loaded	2 = Spring Loaded	A = AC/DC (S6-S12)	See Coil Selection Chart page 2/55	0 = None
2 = 3 pole Vacuum	6 = S10	Choices = 4,5,6	Coil only	6 = Busbar Terminal	N = UC Solid state (S6-S12)		4 = 2NO + 2NC (S6-S12)
3 = 4 pole NO	7 = S12				P = UC Solid state with RLT (S6-S12)		5 = 1NO + 1 NC (S6-S12)
4 = 3 pole resistive load							6 = 2 NO + 2 NC (S6-S12)
5 = 4 pole 2 NO + 2 NC							A) per EN50012
6 = 3 pole Capacitive							

3RT2 SIRIUS Innovations Nomenclature

3RT2	0	1	5	1	A	B0	1
SIRIUS Innovations Contactor	Application	Frame	Current	Terminal	Coil Type	Coil Voltage	Aux Contacts A)
0 = 3 pole Standard	1 = S00	3,4,5,6,7,8	1 = Screw	1 = Screw	A = AC (S0-S3)	See Coil Selection Chart page 2/55	0 = 1NO + 1NC (S0-S3)
3 = 4 pole NO	2 = S0		2 = Spring Loaded	2 = Spring Loaded	B = DC		1 = 1 NO (S00)
5 = 4 pole 2 NO + 2 NC	3 = S2		3 = Spring Loaded	3 = Spring Loaded	N = UC Electronic		2 = 1 NC (S00)
6 = 3-pole Capacitive	4 = S3		4 = Ring Lug	4 = Ring Lug			4 = 2NO + 2NC (S00-S3)



Note: MSPs and Contactors of the same frame size are made to easily fit together with the use of a link module or can be purchased pre-assembled as 3RA starter assemblies. See section 4.

Note: Contactors and Overloads of the frame size S00 - S3 are made to easily fit together without the use of accessories.

Note: This is only a guide to decode the model number. All possible combinations of these are not available.

Contents

SIRIUS contactor relays

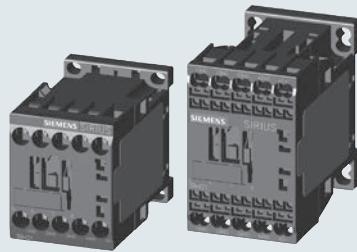

3RH21, 3RH22 control relays 4- and 8-pole, size S00, AC/DC operation

Page

Selection and ordering data

- With screw connections
- With spring connections
- Accessories for 3RH2

Overview	2/20
Technical data	2/192
Terminal diagrams	2/209
Position of terminals	2/210
Dimension drawings	2/232

3RH24 latched control relays, 4-pole, size S00, AC/DC operation


Page

Selection and ordering data

- With screw connections
- Accessories for 3RH2

Application	2/123
Technical data	2/192
Terminal diagrams	2/209
Position of terminals	2/210
Dimension drawings	2/232

SIRIUS coupling relays (interface)



3RH21 coupling relays for switching auxiliary circuits, 4-pole, size S00, DC operation

Page

Selection and ordering data

- With screw connections
- With Cage Clamp connections

Application	2/58
Technical data	2/196
Terminal diagrams	2/209
Position of terminals	2/210
Dimension drawings	2/232

SIRIUS current monitoring relays



3RR current monitoring relays for direct mounting to SIRIUS contactors

Page

Selection and ordering data

- Basic versions
- Standard versions
- Versions with IO-Link
- Accessories for 3RR

Overview	2/91
Application	2/91
Technical data	2/92

Contactors and Contactor Assemblies

Overview



Type	S00 3RT20 1				S0 3RT20 2				S2 3RT20 3					
3RT20 contactors														
Type AC/DC operation	3RT2015 (p. 2/8)	3RT2016	3RT2017	3RT2018	3RT2023 (p. 2/8)	3RT2024	3RT2025	3RT2026	3RT2027	3RT2028	3RT2035 (p. 2/8)	3RT2036	3RT2037	3RT2038
Type AC/DC operation														
Maximum 3-phase horsepower ratings at 460V (UL and CSA listed values)														
200 V	HP	1.5	2	3	3	2	3	5	7.5	10	10	10	20	20
230 V	HP	2	3	3	5	3	3	5	7.5	10	10	15	15	20
460 V	HP	3	5	7.5	10	5	7.5	10	15	20	25	30	40	50
575 V	HP	5	7.5	10	10	7.5	10	15	20	25	25	40	50	60
AC-3														
I_e /AC-3/400V	A	6	9	12	16	9	12	17	25	32	38	40	50	65
230 V	kW	1.5	2.2	3	4	2.2	3	4	5.5	7.5	11	11	15	18.5
400 V	kW	3	4	5.5	7.5	4	5.5	7.5	11	15	18.5	18.5	22	30
500 V	kW	3.5	4.5	5.5	7.5	4.5	7.5	10	11	18.5	18.5	22	30	37
690 V	kW	4	5.5	5.5	7.5	7.5	7.5	11	11	18.5	18.5	22	22	37
1000 V	kW	—	—	—	—	—	—	—	—	—	—	—	—	—
AC-4 (at $I_a = 6 \times I_e$)														
400 V	kW	3	4	4	5.5	4	5.5	7.5	7.5	11	11	18.5	22	30
400 V (200,000 operating cycles)	kW	1.15	2	2	2.5	2	2.6	3.5	4.4	6	6	11.6	12.6	14.7
AC-1 (40°C, $\leq 690V$)														
I_e	A	18	22	22	22	40	40	40	40	50	50	60	70	80
90														

Accessories for contactors

Auxiliary switch blocks	front	3RH29 11 (p. 2/72)	3RH29 11 (p. 2/72)	3RH29 11 (p. 2/72)	3RH29 21 (p. 2/74)
Terminal covers	—	—	—	—	3RT29 36 (p. 2/83)
Box terminals	—	—	—	—	—
Surge suppressor	3RT29 16 (p. 2/79)	3RT29 26 (p. 2/79)	3RT29 26 (p. 2/79)	3RT29 36 (p. 2/79)	3RT29 36 (p. 2/79)

3RU21 and 3RB3 overload relays (Section 3)

3RU21, thermal, CLASS 10	3RU21 16	0.1-16A (p. 3/10)	3RU21 26	0.18-40A (p. 3/10)	3RU21 36	11-80A (p. 3/10)
3RB30/31, solid-state, CLASS 5, 10, 20 and 30	3RB30 16 3RB31 13	0.1-16A (p. 3/22) (p. 3/23)	3RB30 26 3RB31 23	0.1-40A (p. 3/22) (p. 3/23)	3RB30 36 3RB31 33	12-80A (p. 3/22) (p. 3/23)
3RB22/23, solid-state, CLASS 5, 10, 20 and 30	3RB2.83+ 3RB29 06	0.3-25A (p. 3/34)	3RB22	10-100A (p. 3/34)	3RB22, 3RB23 and 3RB24 with current measuring module	

3RV20 circuit-breakers (Section 1)

Type	3RV20 11	0.18-16A (p. 1/4)	3RV20 21	11-40A (p. 1/4)	3RV20 31	9.5-80A (p. 1/5)
Link modules	3RA29 11	(p. 1/10)	3RA29 21	(p. 1/10)	3RA29 31	(p. 1/10)

3RA23 Reversing contractor assemblies

Complete units	Type	3RA2315	3RA2316	3RA2317	3RA2318	3RA2324	3RA2325	3RA2326	3RA2327	3RA2328	3RA2335	3RA2336	3RA2337	3RA2338
		(page 2/46)				(page 2/48)				(page 2/49)				
460 V	HP	3	5	7.5	10	7.5	10	15	20	25	30	40	50	50
Installation kits / wiring connectors		3RA2913-2AA1 (p. 2/87)				3RA2923-2AA1 (p. 2/87)				3RA2933-2AA1 (p. 2/87)				
Mechanical interlocks		3RA2912-2H (p. 2/88)				3RA2922-2H (p. 2/88)				3RA2934-2B (p. 2/86)				

Contactors and Contactor Assemblies

Overview



Type	S3 3RT2. 4	S6 3RT1. 5	S10 3RT1. 6	S12 3RT1. 7	S14 3TF6
------	------------	------------	-------------	-------------	----------

3RT20 contactors

Type AC/DC operation	3RT2045 (p. 2/8)	3RT2046 (p. 2/11)	3RT2047 (p. 2/11)	3RT1054 (p. 2/11)	3RT1055 (p. 2/11)	3RT1056 (p. 2/11)	3RT1064 (p. 2/11)	3RT1065 (p. 2/11)	3RT1066 (p. 2/11)	3RT1075 (p. 2/11)	3RT1076 (p. 2/11)	—	—
Type AC/DC operation							3RT1264 (p. 2/12)	3RT1265 (p. 2/12)	3RT1266 (p. 2/12)	3RT1275 (p. 2/12)	3RT1276 (p. 2/12)	3TF68 (p. 2/59)	3TF69

Maximum 3-phase horsepower ratings at 460V (UL and CSA listed values)

200 V	HP	25	30	30	40	50	60	60	75	100	125	150	200	290
230 V	HP	30	30	40	50	60	75	75	100	125	150	200	250	350
460 V	HP	60	75	75	100	125	150	150	200	250	300	400	500	700
575 V	HP	60	75	100	125	150	200	200	250	300	400	500	650	860

AC-3

I_a /AC-3/400V	A	80	95	110	115	150	185	225	265	300	400	500	630	820
230 V	kW	22	22	30	37	45	55	55	75	90	132	160	200	260
400 V	kW	37	45	55	55	75	90	110	132	160	200	250	335	450
500 V	kW	45	55	75	75	90	110	160	160	200	250	355	434	600
690 V	kW	55	75	90	110	132	160	200	250	250	400	400/500	600	800
1000 V	kW	37	—	—	75	90	90	90/315	132/355	132/400	250/560	250/710	600	800

AC-4 (at $I_a = 6 \times I_e$)

400 V	kW	37	45	55	55	75	90	110	132	160	200	250	355	400
400 V (200,000 operating cycles)	kW	17.9	22	24.3	29	38	45	54/78	66/93	71/112	84/140	98/161	168	191

AC-1 (40°C, $\leq 690V$)

I_e	A	125	130	130	160	185	215	275/330	330	330	430/610	610	700	910
-------	---	-----	-----	-----	-----	-----	-----	---------	-----	-----	---------	-----	-----	-----

Accessories for contactors

Auxiliary switch blocks	front lateral	3RH29 11 (p. 2/72)	3RH19 21 (p. 2/72)	3RH29 21 (p. 2/74)	3RH19 21 (p. 2/74)	—	—	—	—	—	3TY7 561 (p. 2/59)	—	—
Terminal covers		3RT2946-4EA2 (p. 2/85)	3RT19 56-4EA1/2/3 (p. 2/85)	3RT19 66-4EA1/2/3 (p. 2/85)	3RT19 66-4EA1/2/3 (p. 2/85)	—	—	—	—	—	3TX7 686/696 (p. 2/60)	—	—
Box terminals		—	3RT19 55/56-4G (p. 2/85)	3RT19 66-4G (p. 2/85)	3RT19 66-4G (p. 2/85)	—	—	—	—	—	—	—	—
Surge suppressor		3RT29 36 (p. 2/79)	3RT19 56-1C (RC element) (p. 2/79)	3RT19 56-1C (RC element) (p. 2/79)	3RT19 56-1C (RC element) (p. 2/79)	—	—	—	—	—	3TX7 572 (p. 2/60)	—	—

3RU21 and 3RB3 overload relays (Section 3)

3RU21, thermal, CLASS 10		3RU21 46 18-100A (p. 3/10)	—	—	—	—	—	—	—	—	—	—	—	
3RB30/31, solid-state, CLASS 5, 10, 20 and 30		3RB30 46 12.5-100A (p. 3/22)	3RB20 56 50-200A (p. 3/22)	3RB21 56 (p. 3/23)	3RB20 66 50-630A (p. 3/22)	3RB21 66 (p. 3/23)	3RB20 66 160-630A (p. 3/22)	3RB21 66 (p. 3/22)	3RB20 66 160-630A (p. 3/22)	3RB21 66 (p. 3/22)	3RB20 66 160-630A (p. 3/22)	3RB21 66 (p. 3/22)	3RB20 66 160-630A (p. 3/22)	3RB21 66 (p. 3/22)
3RB22/23, solid-state, CLASS 5, 10, 20 and 30		—	3RB2.83 + 20-200A (p. 3/34)	3RB29 56 (p. 3/34)	3RB2.83 + 63-640A (p. 3/34)	3RB29 56 (p. 3/34)	—	—	—	—	—	—	—	—

3RV20 circuit-breakers (Section 1)

Type		3RV20 41 45-100A (p. 1/5)	—	—	—	—	—	—	—	—	—	—	—
Link modules		3RA19 41 (p. 1/10)	—	—	—	—	—	—	—	—	—	—	—

3RA23 Reversing contractor assemblies

Complete units	Type	3RA23 45 (p. 2/50)	3RA23 46 (p. 2/50)	3RA23 47 (p. 2/50)	—	—	—	—	—	—	—	—	—	
460 V	HP	60	75	75	100	125	150	150	200	250	300	400	500	700
Installation kits / wiring connectors		3RA2943-2AA1 (p. 2/87)	3RA1953-2A (p. 2/87)	3RA1963-2A (p. 2/87)	3RA1963-2A (p. 2/87)	3RA1963-2A (p. 2/87)	3RA1973-2A (p. 2/87)	3RA1973-2A (p. 2/87)	3RA1973-2A (p. 2/87)	3RA1973-2A (p. 2/87)	3TX7680-1A	3TX7680-1A	3TX7680-1A	3TX7680-1A
Mechanical interlocks		3RA2934-2B (p. 2/86)	3RA1954-2A (p. 2/86)	3RA1954-2A (p. 2/86)	—	—	—	—	—	—	3TX7686-1A	3TX7686-1A	3TX7686-1A	3TX7686-1A

Contactors for Switching Motors

3RT contactors, 3-pole – Size S00 to S3

2

CONTACTORS AND ASSEMBLIES

Selection and ordering data



3RT201-1A



3RT201-2A...



3RT2028-1N...



3RT2025-2B...



3RT2035-1A...



3RT2045-1A...

Frame Size	Amp Ratings	Single-phase HP ratings	Three-phase HP ratings				Auxiliary contacts		Screw Terminals	Spring-Loaded Terminals ¹⁾	Weight approx.	
	AC3	AC1	115V	208V	230V	460V	575V	NO	NC	Order No.	Order No.	kg
3RT 3-pole contactors												
S00	6	18	0.25	0.5	0.75		1.5	2	3	5	1	0
								0	1	3RT2015-1□●●1	3RT2015-2□●●1	
	9	22	0.33	1	1		2	3	5	7.5	1	0
								0	1	3RT2015-1□●●2	3RT2015-2□●●2	
S0	12	22	0.5	1.5	2		3	3	7.5	10	1	0
								0	1	3RT2016-1□●●1	3RT2016-2□●●1	
	16	22	1	2	2		3	5	10	10	1	0
								0	1	3RT2016-1□●●2	3RT2016-2□●●2	0.24/0.29
S0	9	40	1	1	1		2	3	5	7.5	1	1
	12	40	1	2	2		3	3	7.5	10	1	1
	17	40	1	2	3		5	5	10	15	1	1
	25	40	2	3	3		7.5	7.5	15	20	1	1
	32	50	2	5	5		10	10	20	25	1	1
	38	50	3	5	5		10	10	25	25	1	1
S2	40	60	3	5	7.5		10	15	30	40	1	1
	50	70	3	7.5	10		15	15	40	50	1	1
	65	80	5	10	10		20	20	50	50	1	1
	80 ²⁾	90	5	10	15		20	25	50	60	1	1
S3	80	125	7.5	10	15		25	30	60	60	1	1
	95	130	10	10	20		30	30	75	75	1	1
	110	130	10	10	20		30	40	75	100	1	1

Size S2 & S3 only: Replace "B" with "K" for 24VDC coil only
 Size S0-S3 only: UC Electronic with integrated varistor

□
 AC Coil = A
 DC Coil = B
 UC Coil = N

NEMA Size	Amp Ratings	Single-phase HP ratings	Three-phase HP ratings				Auxiliary contacts		Screw Terminals with AC coil	Screw Terminals with 24 VDC coil	Weight approx.	
		115V	230V	208V	230V	460V	575V	NO	NC	Order No.	Order No.	kg
NEMA Labeled Contactors												
0	18	1	2	3	3	5	5	1	0	3RT2018-1A●●1-0UA0	3RT2018-1BB41-0UA0	0.28
1	27	2	3	7.5	7.5	10	10	1	1	3RT2027-1A●●0-0UA0	3RT2027-1BB40-0UA0	0.42
2	45	3	7.5	10	15	25	25	1	1	3RT2036-1A●●0-0UA0	3RT2036-1NB30-0UA0	0.986/1.121
3	90	7.5	15	25	30	50	50	1	1	3RT2046-1A●●0-0UA0	3RT2046-1NB30-0UA0	1.8 / 2.8

Note: Ring lug terminals are also available in size S00 & S0 contactors, except contactors with communication interface or UC coil. Change the 8th digit of the order number to a "4", e.g. 3RT2015-4AK61.

For further coil voltages, see page 2/55.

For auxiliaries and accessories, see page 2/72-2/89.

For spare parts, see page 2/101-2/106.

For technical data, see page 2/128-2/149.

For description, see page 2/111-2/112.

For int. circuit diagrams, see page 2/197-2/204.

For dimension drawings, see page 2/216-2/219.

AC Coil Selection for 3RT201 through 3RT204

●●Coil Code	C2 ³⁾	H2 ⁴⁾	K6	P6	U6	V6	T6
60 Hz	24 V	48 V	120 V	240 V	277 V	480 V	600 V
50 Hz	24 V	48 V	110 V	220 V	—	—	—

DC Coil Selection for 3RT201 & 3RT202 (for 3RT203 & 3RT204 see UC)

●●Coil Code	A4 ⁵⁾	B4	W4	E4	F4	G4	M4
DC	12 V	24 V	48 V	60 V	110 V	125 V	220 V

UC Coil Selection for 3RT202

●●Coil Code	B3	F3	P3 ⁵⁾	●●	B3	F3	P3 ⁶⁾
UC	21-28V	95-130V	200-280V	—	20-33V	83-155V	175-280V

¹⁾ All terminals are spring loaded on frame sizes S00 & S0.

Only the coil terminals are spring loaded on frame sizes S2 & S3.

²⁾ Max UL FLA = 65A at 460V

³⁾ Use Code B0 for 3RT201, S00

⁴⁾ Use Code H0 for 3RT201, S00

⁵⁾ 3RT201 and 3RT202 only

⁶⁾ at upper limit = 1.1 x U_S



Contactors for Switching Motors

3RT contactors, 3-pole – Size S6-S12 and NEMA size 4-6

Selection and ordering data

- * AC/DC Coils with built in surge suppressor
- * Coil Types (40Hz to 60Hz, DC):
 - Conventional Coil
 - Solid-state operated coil with wider range and 24 V DC PLC input
 - Solid-state operated coil with Remaining Lifetime Indication (RLT)
- * Box terminals ordered separately



3RT1054-6A..6



3RT1065-6P..5

Frame Size	Amp Ratings		Single-phase HP ratings		Three-phase HP ratings			Auxiliary contacts		Screw Terminals on coil and aux.	Spring-type terminals on coil and aux. contacts	Weight approx. kg		
	AC3	AC1	115V	230V	200V	230V	460V	575V	NO	NC				
3RT 3-pole Contactors														
S6	115	160	—	25	40	50	100	125	2	2	3RT1054-6□●●6	3RT1054-2□●●6	3.5	
	150	185	—	30	50	60	125	150	2	2	3RT1055-6□●●6	3RT1055-2□●●6		
	185	215	—	30	60	75	150	200	2	2	3RT1056-6□●●6	3RT1056-2□●●6		
S10	225	275	—	—	60	75	150	200	2	2	3RT1064-6□●●6	3RT1064-2□●●6	6.7	
	265	330	—	—	75	100	200	250	2	2	3RT1065-6□●●6	3RT1065-2□●●6		
	300	330	—	—	100	125	250	300	2	2	3RT1066-6□●●6	3RT1066-2□●●6		
S12	400	430	—	—	125	150	300	400	2	2	3RT1075-6□●●6	3RT1075-2□●●6	10.5	
	500	610	—	—	150	200	400	500	2	2	3RT1076-6□●●6	3RT1076-2□●●6		
UC Conventional Coil Solid State Operated Coil = Solid State Operated Coil with RLT =													□ A N P●●5	□ A N —

NEMA Size	Amp Ratings	Single-phase HP ratings		Three-phase HP ratings			Auxiliary contacts		Screw Terminals on coil and aux.	Spring-type terminals on coil and aux. contacts	Weight approx. kg	
		115V	230V	208V	230V	460V	575V	NO	NC			
NEMA Labeled Contactors												
4	135	—	30	40	50	100	100	2	2	3RT1056-6A●●6-0UA0	—	3.5
5	300	—	—	100	125	250	300	2	2	3RT1066-6A●●6-0UA0	—	6.7
6	400	—	—	150	200	400	500	2	2	3RT1076-6A●●6-0UA0	—	10.5

All coil voltages are in the adjacent table.
For auxiliaries and accessories, see page 2/66-2/83.

For spare parts, see page 2/94-2/99.

For technical data, see page 2/143-2/151.

For description, see page 2/106-2/107.

For int. circuit diagrams, see page 2/196-2/198.

For dimension drawings, see page 2/213-2/222.

Sizes S6 to S12 Coil Codes - UC operation (AC 50 to 60 Hz and DC)

UC Conventional Coil		Solid-State Coil	
Rated control supply voltage Us	Us min ... Us max ¹⁾	Rated control supply voltage Us	3RT1. 5..N
Us min ... Us max ¹⁾	3RT1. 6..A	Us min ... Us max ¹⁾	3RT1. 6..P
	3RT1. 7..A		3RT1. 6..N
			3RT1. 7..P
Coil Codes		Coil Codes	
●●		●●	
23 ... 26 V AC/DC	B3	21 ... 27.3 V AC/DC	B3
42 ... 48 V AC/DC	D3	96 ... 127 V AC/DC	F3
110 ... 127 V AC/DC	F3	200 ... 277 V AC/DC	P3
200 ... 220 V AC/DC	M3		
220 ... 240 V AC/DC	P3		
240 ... 277 V AC/DC	U3		
380 ... 420 V AC/DC	V3		
440 ... 480 V AC/DC	R3		
500 ... 550 V AC/DC	S3		
575 ... 600 V AC/DC	T3		

1) Operating range:
0.8 x Us min to 1.1 x Us max.



Contactors for Switching Motors with Integrated Safety

3RT contactors, 3-pole up to 400 HP

NEW

2

CONTACTORS AND ASSEMBLIES

Contactor with integrated failsafe connection

Features

- New Contactors from 100 to 400 HP for direct control by fail-safe controllers
- First contactor with fail-safe input
- Certified for use up to the highest safety level
- SIL CL 2 with one / SIL CL 3 with two contactors

Benefits

- Savings on standard outputs in the controller
- Space savings due to elimination of the coupling level
- Less wiring
- Simplified safety assessment



Overview

The size S6 to S12 range of tried and tested contactors from 100 to 400 HP @ 480V has been expanded to include versions suitable for direct control from fail-safe controllers, rendering the coupling level superfluous. The new contactors are also available with non-removable, lateral auxiliary switches, enabling fulfilment of Swiss Accident Insurance Institute (SUVA) requirements.


The new contactors constitute the logical extension and further development of the SIRIUS Modular System, serving to promote safe switching. They are the first contactors on the market to be equipped with an input for fail-safe signals. This makes it possible to attain SIL 2 and/or PLC with just one contactor and SIL 3 and/or PLe with two contactors in series according to IEC 62061 and ISO 13849-1.

The big advantage of this solution is that it saves on additional, possibly positively-driven coupling relays and makes evaluation of safety information considerably easier.

This reduction in coupling relays is also a huge plus point for non-safety applications. Whereas previously space, money and wiring expertise were required in order to operate contactors from 100 HP and higher using controllers, both functional and safety switching can now take place by direct activation.

Using the Safety Evaluation Tool you can quickly find the right contactor and safely configure your application.


Save space and costs with a direct connection to the controller – no need for coupling relays!

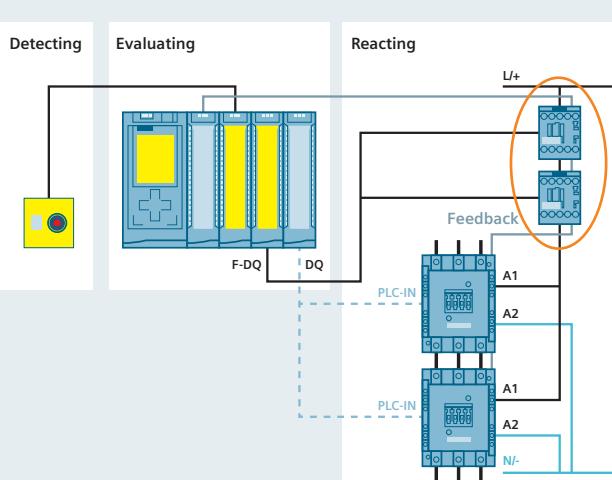

Previous configuration:

3RT1 size S6 for high motor outputs with standard PLC-IN

- Normal switching duty via standard IO and PLC-IN
- Safety-related tripping initiated by monitoring coupled links
- Feedback of the two S6 size 3RT1 contacts and the coupling relays via standard IO

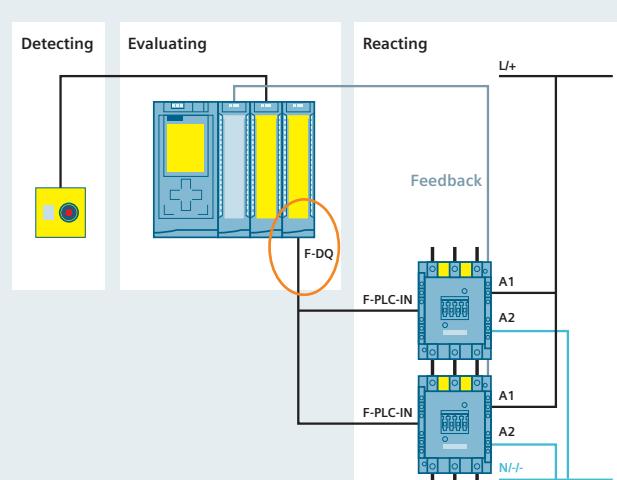

NEW configuration:

3RT1 size S6 for high motor outputs with new contactor with fail-safe F-PLC-IN

- A1-A2 supplied via standard power supply (unit)
- Normal switching duty via F-DQ and F-PLC-IN
- Safety-related tripping via the same signal
- Feedback of the two S6 size 3RT1 via standard IO



Contactors for Switching Motors with Integrated Safety

3RT contactors, 3-pole up to 400 HP **IE3/IE4 ready**

AC/DC Operation

- Solid-state operating mechanism (with integrated varistor) with fail-safe control input for safety-related applications to SIL CL 3
- 24 V DC control signal input, e.g. for control via the fail-safe output module of a controller (F-PLC) or safety relay
- Attainable Safety Integrity Level (SIL):
 - With one contactor: SIL CL 2 acc. to IEC 62061 or PL c acc. to ISO 13849-1
 - With two contactors in series: SIL CL 3 acc. to IEC 62061 or PL e acc. to ISO 13849-1 according to IEC 60947-4-1, test conditions for utilization category AC-1



3RT105-6S.36



3RT106-6S.36



3RT107-6S.36



3RT105-6S.36-3PA0



3RT107-6S.36-3PA0

Selection and ordering data

Frame Size	Amp Ratings		Single-phase HP ratings		Three-phase HP ratings			Auxiliary contacts		Rated control supply voltage U_S		Screw Terminals on coil and aux. Order No.
	AC3	AC1	115V	230V	200V	230V	460V	575V	NO	NC	50/60 Hz AC or DC	

Solid-state operating mechanism

With two removable laterally mounted auxiliary switches

S6	115	160	—	25	40	50	100	125	2	2	96 ... 127 200 ... 270	3RT1054-6SF36 3RT1054-6SP36
	150	185	—	30	50	60	125	150	2	2	96 ... 127 200 ... 277	3RT1055-6SF36 3RT1055-6SP36
	185	215	—	30	60	75	150	200	2	2	96 ... 127 200 ... 277	3RT1056-6SF36 3RT1056-6SP36
S10	225	275	—	—	60	75	150	200	2	2	96 ... 127 200 ... 277	3RT1064-6SF36 3RT1064-6SP36
	265	330	—	—	75	100	200	250	2	2	96 ... 127 200 ... 277	3RT1065-6SF36 3RT1065-6SP36
	300	330	—	—	100	125	250	300	2	2	96 ... 127 200 ... 277	3RT1066-6SF36 3RT1066-6SP36
S12	400	430	—	—	125	150	300	400	2	2	96 ... 127 200 ... 277	3RT1075-6SF36 3RT1075-6SP36
	500	610	—	—	150	200	400	500	2	2	96 ... 127 200 ... 277	3RT1076-6SF36 3RT1076-6SP36

With two permanently laterally mounted auxiliary switches

S6	115	160	—	25	40	50	100	125	2	2	96 ... 127 200 ... 270	3RT1054-6SF36-3PA0 3RT1054-6SP36-3PA0
	150	185	—	30	50	60	125	150	2	2	96 ... 127 200 ... 277	3RT1055-6SF36-3PA0 3RT1055-6SP36-3PA0
	185	215	—	30	60	75	150	200	2	2	96 ... 127 200 ... 277	3RT1056-6SF36-3PA0 3RT1056-6SP36-3PA0
S10	225	275	—	—	60	75	150	200	2	2	96 ... 127 200 ... 277	3RT1064-6SF36-3PA0 3RT1064-6SP36-3PA0
	265	330	—	—	75	100	200	250	2	2	96 ... 127 200 ... 277	3RT1065-6SF36-3PA0 3RT1065-6SP36-3PA0
	300	330	—	—	100	125	250	300	2	2	96 ... 127 200 ... 277	3RT1066-6SF36-3PA0 3RT1066-6SP36-3PA0
S12	400	430	—	—	125	150	300	400	2	2	96 ... 127 200 ... 277	3RT1075-6SF36-3PA0 3RT1075-6SP36-3PA0
	500	610	—	—	150	200	400	500	2	2	96 ... 127 200 ... 277	3RT1076-6SF36-3PA0 3RT1076-6SP36-3PA0



Contactors for Switching Motors

3RT12 vacuum contactors, 3-pole

2

CONTACTORS AND ASSEMBLIES

Selection and ordering data

- AC/DC operation (40 Hz ... 60 Hz, DC)
- Withdrawable coils
- Integrated coil circuit (varistor)
- Auxiliary and control conductors: screw connections
- Main conductor: bar connections

Size	Horsepower ratings and utilization categories								Auxiliary contacts, lateral	Rated control supply voltage U_s	Order No.	Weight approx.	
	AC-3 Maximum inductive current	Ratings of three-phase motors				AC-1 Maximum resistive current							
		200 V	230 V	460 V	575 V	Amps	HP	HP	HP	Amps	NO	NC	AC/DC V
Conventional operating mechanism													
3RT12 6.	S10	225	60	75	150	200	330	2	2	110 ... 127 220 ... 240	3RT12 64-6AF36 3RT12 64-6AP36	6.4	
		265	75	100	200	250	330	2	2	110 ... 127 220 ... 240	3RT12 65-6AF36 3RT12 65-6AP36		
		300	100	125	250	300	330	2	2	110 ... 127 220 ... 240	3RT12 66-6AF36 3RT12 66-6AP36		
	S12	400	125	150	300	400	610	2	2	110 ... 127 220 ... 240	3RT12 75-6AF36 3RT12 75-6AP36	9.6	
		500	150	200	400	500	610	2	2	110 ... 127 220 ... 240	3RT12 76-6AF36 3RT12 76-6AP36		
	Solid-state operating mechanism - for DC 24 V PLC output												
3RT12 7.	S10	225	60	75	150	200	330	2	2	96 ... 127 200 ... 277	3RT12 64-6NF36 3RT12 64-6NP36	6.4	
		265	75	100	200	250	330	2	2	96 ... 127 200 ... 277	3RT12 65-6NF36 3RT12 65-6NP36		
		300	100	125	250	300	330	2	2	96 ... 127 200 ... 277	3RT12 66-6NF36 3RT12 66-6NP36		
	S12	400	125	150	300	400	610	2	2	96 ... 127 200 ... 277	3RT12 75-6NF36 3RT12 75-6NP36	9.6	
		500	150	200	400	500	610	2	2	96 ... 127 200 ... 277	3RT12 76-6NF36 3RT12 76-6NP36		

Universal Coil Selection for 3RT126 through 3RT127: Conventional Operation

Coil Code	B3	D3	F3	M3	P3	U3	V3	R3	S3	T3
Volts AC/DC 40 - 60 Hz, DC	23 ... 26 V	42 ... 48 V	110 ... 127 V	200 ... 220 V	220 ... 240 V	240 ... 277 V	380 ... 420 V	440 ... 480 V	500 ... 550 V	575 ... 600 V

Solid State Selection for 3RT126 through 3RT127: Solid-State

Coil Code	B3	F3	P3
Volts AC/DC 40 - 60 Hz, DC	21 ... 27.3 V	96 ... 127 V	200 ... 277 V

For further vacuum contactors, 500Hp and 700Hp (3TF68/69), see page 2/59.

For auxiliaries and accessories, see page 2/74.

For spare parts, see page 2/105-2/106.

For technical data, see page 2/159-2/164.

For int. circuit diagrams, see page 2/203.

For dimension drawings, see page 2/223.



Contactors and Contactor Assemblies

Contactors for Special Applications

3RT23 contactors, 4-pole (4 NO contacts) for switching resistive loads (AC-1)

Standards

IEC 60947-1, EN 60947-1
IEC 60947-4-1, EN 60947-4-1
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

Design

The contactors are suitable for use in any climate. They are safe from touch to DIN VDE 0106, Part 100. The accessories for the 3-pole SIRIUS contactors can also be used for the 4-pole designs.

Mountable auxiliary contacts

Size S00: 4 auxiliary contacts of which up to 3 can be NC.

Size S0 & S2: 4 additional auxiliary contacts up to 3 can be NC.

Sizes S2 and S3: Up to 4 auxiliary contacts (either laterally mounted or snapped onto the top).

Contactor assemblies with mechanical interlock

The 4-pole 3RT23 contactors with 4 NO contacts as the main contacts are suitable for making contactor assemblies with a mechanical interlock, e.g. for system transfers.

Size S00: Contactor assemblies can be made using two 3RT231 contactors in conjunction with the mechanical interlock and two connecting clips (Order No. 3RA2912-2H, pack comprising 10 interlocking elements and 20 clips for 10 contactor assemblies, see accessories on page 2/72).

Selection and ordering data

Rating data		Auxiliary contacts			Rated control supply voltage U_s 50/60 Hz V AC	AC Operation Screw Terminals ¹⁾ Order No.	Rated control supply voltage U_s V DC	DC Operation Screw Terminals ¹⁾ Order No.
AC-1 Max resist. current I_e	UL ratings AC loads at 600 V	Ident- ification No.	Version NO	NC				
40°C 60°C Amps	60 Hz Amps							

For screwing and snapping onto 35 mm mounting rail

3RT23 17-1AP60



3RT23 27-1AP60



3RT23 36-1AP60



Size S00

Auxiliary switches can be retrofitted

18	16	18	—	—	24 110/120 220/240	3RT23 16-1AB00 3RT23 16-1AK60 3RT23 16-1AP60	24 125 220	3RT23 16-1BB40 3RT23 16-1BG40 3RT23 16-1BM40
22	20	20	—	—	24 110/120 220/240	3RT23 17-1AB00 3RT23 17-1AK60 3RT23 17-1AP60	24 125 220	3RT23 17-1BB40 3RT23 17-1BG40 3RT23 17-1BM40

Size S0

Terminal designations according to EN 50012 —1 NO + 1 NC, identification number 11E

35 ²⁾ 30 ²⁾	30	11E	1	1	24 110/120 220/240	3RT23 25-1AC20 3RT23 25-1AK60 3RT23 25-1AP60	24 125 220	3RT23 25-1BB40 3RT23 25-1BG40 3RT23 25-1BM40
40 ²⁾ 35 ²⁾	35	11E	1	1	24 110/120 220/240	3RT23 26-1AC20 3RT23 26-1AK60 3RT23 26-1AP60	24 125 220	3RT23 26-1BB40 3RT23 26-1BG40 3RT23 26-1BM40
50 ²⁾ 42 ²⁾	38	11E	1	1	24 110/120 220/240	3RT23 27-1AC20 3RT23 27-1AK60 3RT23 27-1AP60	24 125 220	3RT23 27-1BB40 3RT23 27-1BG40 3RT23 27-1BM40

Size S2

V UC

60	55	60	11E	1	1	24 110/120 220/240	3RT23 36-1AC20 3RT23 36-1AK60 3RT23 36-1AP60	20-33 83-155 175-280	3RT23 36-1NB30 3RT23 36-1NF30 3RT23 36-1NP30
110	95	105	11E	1	1	24 110/120 220/240	3RT23 37-1AC20 3RT23 37-1AK60 3RT23 37-1AP60	20-33 83-155 175-280	3RT23 37-1NB30 3RT23 37-1NF30 3RT23 37-1NP30

Size S3

V UC

140	130	120	—	—	—	24 110/120 220/240	3RT23 46-1AC20 3RT23 46-1AK60 3RT23 46-1AP60	20-33 83-155 175-280	3RT23 46-1NB30 3RT23 46-1NF30 3RT23 46-1NP30
-----	-----	------------	---	---	---	--------------------------	--	----------------------------	--

1) Size S00 and S0 contactors are also available with spring-type terminals. Replace the 8th digit of the order no. with a "2" e.g. "3RT23 16-2AK60"

2) Minimum conductor cross-section 8 AWG.

For further voltages, see page 2/55.
For coil voltage tolerance, p. 2/55
For auxiliaries and accessories, see page 2/72-2/89.
For spare parts, see page 2/101-2/106.

For technical data, see page 2/173-2/174.
For in. circuit diagrams, see page 2/198-2/203.
For dimension drawings, see page 2/224.



Contactors for Switching Motors

3RT.3 contactors, 4-pole, up to 525 A

Sizes S6 to S12: AC/DC operation 

- Solid-state operating mechanism
- Version with two laterally mounted auxiliary switches (2 NO + 2 NC each)

- For screw fixing
- Auxiliary and control circuits: Screw terminals
- Main conductors: Busbar connections;
a connection kit is enclosed.



3RT1355-6A.36



3RT1363-6A.36



3RT1373-6A.36

Size	Rated data AC-1, $t_u: 40^\circ\text{C}$	Auxiliary contacts, lateral	Operating range		Busbar connections	Article No.	Price per PU	PU (UNIT, SET, M)	PS
			0.85 ... 1.1 $\times U_s$	0.8 ... 1.1 $\times U_s$					
	Operational current I_e at 600 V	Version	Rated control supply voltage U_s 50/60 Hz AC	DC					
	A	NO	NC	V	V				
Solid-state operating mechanism									
With integrated coil circuit (varistor integrated in electronics at the factory)									
S6	200	2	2	24 ... 60	20 ... 60	3RT1355-6AE36		1	1 unit
				48 ... 130	48 ... 130	3RT1355-6AF36		1	1 unit
				100 ... 250	100 ... 250	3RT1355-6AP36		1	1 unit
				250 ... 500	250 ... 500	3RT1355-6AR36		1	1 unit
S10	230	2	2	24 ... 60	20 ... 60	3RT1363-6AE36		1	1 unit
				48 ... 130	48 ... 130	3RT1363-6AF36		1	1 unit
				100 ... 250	100 ... 250	3RT1363-6AP36		1	1 unit
				250 ... 500	250 ... 500	3RT1363-6AR36		1	1 unit
	250	2	2	24 ... 60	20 ... 60	3RT1364-6AE36		1	1 unit
				48 ... 130	48 ... 130	3RT1364-6AF36		1	1 unit
				100 ... 250	100 ... 250	3RT1364-6AP36		1	1 unit
				250 ... 500	250 ... 500	3RT1364-6AR36		1	1 unit
S12	300	2	2	24 ... 60	20 ... 60	3RT1373-6AE36		1	1 unit
				48 ... 130	48 ... 130	3RT1373-6AF36		1	1 unit
				100 ... 250	100 ... 250	3RT1373-6AP36		1	1 unit
				250 ... 500	250 ... 500	3RT1373-6AR36		1	1 unit
	350	2	2	24 ... 60	20 ... 60	3RT1374-6AE36		1	1 unit
				48 ... 130	48 ... 130	3RT1374-6AF36		1	1 unit
				100 ... 250	100 ... 250	3RT1374-6AP36		1	1 unit
				250 ... 500	250 ... 500	3RT1374-6AR36		1	1 unit
420	420	2	2	24 ... 60	20 ... 60	3RT1375-6AE36		1	1 unit
				48 ... 130	48 ... 130	3RT1375-6AF36		1	1 unit
				100 ... 250	100 ... 250	3RT1375-6AP36		1	1 unit
				250 ... 500	250 ... 500	3RT1375-6AR36		1	1 unit

Depending on the operational current, bus connectors offset must be used for sizes S10 and S12, [see page 4/35](#):

Accessories and spare parts, see page 4/35 onwards.

- 3RT136: For more than 275 A, the 3RT1966-4D bus connectors offset must be used.
- 3RT137: For more than 450 A, the 3RT1976-4D bus connectors offset must be used.



Contactors for Special Applications

3RT24, 3-pole for switching resistive loads (AC-1)

Application

AC and DC operation (size S3)
UC operation (AC/DC) (sizes S6 to S12)

IEC 60 947, EN 60 947 (VDE 0660)

The contactors are suitable for use in any climate. They are safe from touch to DIN VDE 0106 Part 100.

3RT14/3RT24 contactors are used for switching resistive loads.

(AC-1) or as contactors, for example in variable-speed drives which normally only have to carry the current.

The accessories for the SIRIUS 3RT10/3RT20 contactors can also be used here.

Selection and ordering data

3RT24 46-1A..0



Ratings AC-1 utilization category,	UL Ratings				Rated control supply voltage U_s	Order No.	Weight approx. kg
	IEC Ratings	Max Current	230/240V	460/480V			
Maximum current	Rated power of three phase loads $\cos \phi = 0.95$ (@ 60°C)	Amps	230V kW	400V kW	500V kW	690V kW	Amps

With screw connections · for screwing and snapping onto 35 mm and 75 mm standard mounting rails

Size S3 · (without auxiliary contacts)

• **AC operation**

140	50	86	107	148	140	15	30	40	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	3RT24 46-1AC2 0 3RT24 46-1AK6 0 3RT24 46-1AP6 0	1.8
-----	----	----	-----	-----	-----	----	----	----	--	---	-----

• **DC operation · DC solenoid system**

140	50	86	107	148	131	15	30	40	DC 24 V DC 48 V	3RT24 46-1BB4 0 3RT24 46-1BW40	2.7
-----	----	----	-----	-----	-----	----	----	----	--------------------	-----------------------------------	-----

• **AC/DC operation (40 Hz ... 60 Hz, DC)**

• **Withdrawable coils**

• **Main conductor: bar connections**

3RT14 6..



Size	Ratings AC-1 utilization category,	UL Rating				Auxiliary contacts, lateral	Rated control supply voltage U_s	Order No.	Weight approx. kg
		IEC Ratings	Max Current	Amps	NO				
AC-1 Maximum resistive current	Rated power of three phase loads $\cos \phi = 0.95$ (@ 60°C)	230V kW	400V kW	500V kW	690V kW	Amps			

Conventional operating mechanism

S6 275	95	165	205	285	210	2	2	110 ... 127 220 ... 240	3RT14 56-6AF36 3RT14 56-6AP36	3.1
S10 400	145	250	315	430	360	2	2	110 ... 127 220 ... 240	3RT14 66-6AF36 3RT14 66-6AP36	5.7
S12 690	245	430	535	740	580	2	2	110 ... 127 220 ... 240	3RT14 76-6AF36 3RT14 76-6AP36	9.1

Solid-state operating mechanism · for DC 24 V PLC output

S6 275	95	165	205	285	210	2	2	96 ... 127 200 ... 277	3RT14 56-6NF36 3RT14 56-6NP36	3.1
S10 400	145	250	315	430	360	2	2	96 ... 127 200 ... 277	3RT14 66-6NF36 3RT14 66-6NP36	5.7
S12 690	245	430	535	740	580	2	2	96 ... 127 200 ... 277	3RT14 76-6NF36 3RT14 76-6NP36	9.1

Solid-state operating mechanism · for DC 24 V PLC with remaining lifetime indication

S6 275	95	165	205	285	210	1	1	96 ... 127 200 ... 277	3RT14 56-6PF35 3RT14 56-6PP35	3.1
S10 400	145	250	315	430	360	1	1	200 ... 277	3RT14 66-6PP35	5.7
S12 690	245	430	535	740	580	1	1	200 ... 277	3RT14 76-6PP35	9.1

3RT14 7..



Universal Coil Selection for 3RT145 through 3RT147: Conventional Operation

Coil Code	B3	D3	F3	M3	P3	U3	V3	R3	S3	T3
Volts AC/DC 40 - 60 Hz, DC	23 ... 26 V	42 ... 48 V	110 ... 127 V	200 ... 220 V	220 ... 240 V	240 ... 277 V	380 ... 420 V	440 ... 480 V	500 ... 550 V	575 ... 600 V

For further coil voltages, see page 2/55.

For auxiliaries and accessories, see page 2/72-2/89.

For spare parts, see page 2/101-2/106.

For technical data, see page 2/165-2/172.

For int. circuit diagrams, see page 2/203.

For dimension drawings, see page 2/218, 2/220-2/221.

Universal Coil Selection for 3RT145 through 3RT147: Solid-State

Coil Code	B3	F3	P3
Volts AC/DC 40 - 60 Hz, DC	21 ... 27.3 V	96 ... 127 V	200 ... 277 V

Note: B3 code not available for Remaining Lifetime Contactors.



Contactors for Special Applications

3RT.4 contactors for switching resistive loads (AC-1), 3-pole up to 2 650 A

AC/DC operation

- Solid-state operating mechanism
- Version with two laterally mounted auxiliary switches (2 NO + 2 NC each)

- For screw fixing
- Auxiliary and control conductors: Screw terminals
- Main conductors: Busbar connections

2

CONTACTORS AND ASSEMBLIES



3RT1481-6A.36, 3RT1482-6A.36



3RT1483-6AP36



3RT1485-6AP36, 3RT1486-6AP36



3RT1487-6AP36

Rated data according to IEC 60947-4-1 AC-1, t_u : 40 °C Operational current I_e up to 1 000 V	Auxiliary contacts, lateral Version	Rated control supply voltage U_s 50/60 Hz AC DC	Busbar connections	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Solid-state operating mechanism							
With integrated coil circuit							
900	2 2	100 ... 127 200 ... 240	100 ... 110 200 ... 220	3RT1481-6AF36 3RT1481-6AP36	1 1	1 unit 1 unit	
1 050	2 2	100 ... 127 200 ... 240	100 ... 110 200 ... 220	3RT1482-6AF36 3RT1482-6AP36	1 1	1 unit 1 unit	
1 260	2 2	100 ... 240	100 ... 220	3RT1483-6AP36	1	1 unit	
1 700	2 2	100 ... 240	100 ... 220	3RT1485-6AP36	1	1 unit	
2 100	2 2	100 ... 240	100 ... 220	3RT1486-6AP36	1	1 unit	
2 650	2 2	100 ... 240	100 ... 220	3RT1487-6AP36	1	1 unit	

Accessories, see next table; spare parts, see page 4/19.

Accessories

Overview graphics for 3RT148 contactors with mountable accessories, see page 4/10.

More information

Manuals, see
<https://support.industry.siemens.com/cs/ww/en/ps/24229/man>

For contactors	Auxiliary contacts Version	Screw terminals	PU (UNIT, SET, M)	PS*
Second auxiliary switch (1 NO + 1 NC)				
3RT148.	1 1		3RH1981-1JA11	1 1 unit



3RH1981-1JA11



Contactors for Special Applications

3RT.4 contactors for switching resistive loads (AC-1), 3-pole up to 2 650 A

Spare parts

For contactors	Auxiliary contacts		Rated control supply voltage U_s		Article No.	Price per PU	PU (UNIT, SET, M)	PS*
	Version		50/60 Hz AC	DC				
Type	NO	NC	Left	Right	V			
First auxiliary switch (1 NO + 1 NC)								
	Lateral mounting on the right and/or the left	3RT148...	1	1		3RH1981-1DA11	1	1 unit
3RH1981-1DA11								
Phase barriers								
	(1 set = 4 units)	3RT1481	--	--	--	3RT1983-4AA1	1	1 unit
		...	3RT1483					
		3RT1485	--	--	--	3RT1987-4AA1	1	1 unit
		...	3RT1487					
		3RT1481	--	--	--	3RT1987-4AA1	1	1 unit
3RT1987-4AA1		3RT1485	--	--	--			
Withdrawable coils · AC/DC operation								
	3RT1481, 3RT1482	--	--	--	100 ... 127	3RT1982-5AF31	1	1 unit
3RT1982-5A31, 3RT1983-5AP31	3RT1483	--	--	--	200 ... 240	3RT1982-5AP31	1	1 unit
		--	--	--	100 ... 240	3RT1983-5AP31	1	1 unit
	3RT1485	--	--	--	100 ... 240	3RT1987-5AP31	1	1 unit
	...	3RT1487			100 ... 220			
3RT1987-5AP31								

Contactors and Contactor Assemblies

Contactors for Special Applications



3RT25 contactors, 4-pole (2 NO + 2 NC) contacts for switching motors

AC and DC operation

IEC 60 947-4-1/EN 60 947-4-1
(VDE 0660, Part 102)

Design

The contactors are suitable for use in any climate. They are safe to touch according to EN 50274. The accessories for the 3-pole SIRIUS contactors can also be used for the 4-pole designs.

Mountable auxiliary contacts

Size S00 and S0:

4 auxiliary contacts, of which up to 4 can be NC contacts.

Size S2

Up to 4 auxiliary contacts (either laterally mounted or snapped onto the top; auxiliary switch blocks to EN 50 012 and EN 50 005)

Application


- Changing the polarity of hoisting gear motors
- Switching two separate loads from the same source

Selection and ordering data

Rating data		AC-1 Max resistive current	Auxiliary contacts Version	Rated control supply voltage U_s	AC Operation ²⁾ Screw terminals	Rated control supply voltage U_s	DC Operation ²⁾ Screw terminals
Max Current I_e at 400 V	Max motor HP at 460 V, 60 Hz						
Amps	NO NC	Amps	NO NC	V AC, 50/60 Hz		V DC	

For screwing and snapping onto 35 mm standard mounting rail

3RT25 16-1AB00

Size S00³⁾ - Auxiliary switches can be retrofitted

9

5

18

16

—

—

24

3RT25 16-1AB00

24

3RT25 16-1BB40

110/120

220/240

3RT25 16-1AK60

125

3RT25 16-1BG40

3RT25 16-1AP60

220

3RT25 16-1BM40

12

7.5⁴⁾

22

20

—

—

24

3RT25 17-1AB00

24

3RT25 17-1BB40

110/120

220/240

3RT25 17-1AK60

125

3RT25 17-1BG40

3RT25 17-1AP60


220

3RT25 17-1BM40

3RT25 26-1AC20



Size S0 - Terminal designations according to EN 50012, 1 NO + 1 NC, identification number 11E



25

15

15

40

35

1

1

3RT25 26-1AC20

24

3RT25 26-1BB40

110/120

220/240

3RT25 26-1AK60

125

3RT25 26-1BG40

3RT25 26-1AP60

220

3RT25 26-1BM40

For further voltages, see page 2/55.
For auxiliaries and accessories, see page 2/72-2/89.
For spare parts, see page 2/101-2/106.
For technical data, see page 2/175-2/176.
For int. circuit diagrams, see page 2/198-2/203.
For dimension drawings, see page 2/224.

1) For changing polarity; not suitable for reversing.

2) Size S00 and S0 contactors are also available with spring-type terminals. Replace the 8th digit of the order no. with a "2" e.g. "3RT25 16-2AK60".

3) Size S00:

Coil voltage tolerance
at 50 Hz: 0.8 ... 1.1 x U_s
at 60 Hz: 0.85 ... 1.1 x U_s

4) The NC contact can switch up to 5 HP.



Contactors for Special Applications

3RT25 contactors, 4-pole (2 NO + 2 NC) contacts for switching motors

Selection and ordering data (continued)

Rating data				Auxiliary contacts Version	Rated control supply voltage U_s	AC Operation ²⁾ Screw terminals	Rated control supply voltage U_s	DC Operation ²⁾ Screw terminals
Max Current I_e at 400 V	Max motor HP at 460 V, 60 Hz	AC-2/AC-3 T_u : up to 60°C	AC-1 Max resistive current					
Amps	NO NC	40°C 60°C	Amps	NO NC	V AC, 50/60 Hz	Order No.	V DC	Order No.

For screwing and snapping onto 35 mm standard mounting rail

Size S2



3RT253-1N.30

35		30		20		60		55		1		1		24	3RT25 35-1AC20	20-33	3RT25 35-1NB30
														110/120	3RT25 35-1AK60	83-155	3RT25 35-1NF30
														220/240	3RT25 35-1AP60	175-280	3RT25 35-1NP30
41	30	25	30	25	70	60	1	1	1	24	3RT25 36-1AC20	20-33	3RT25 36-1NB30				
										110/120	3RT25 36-1AK60	83-155	3RT25 36-1NF30				
										220/240	3RT25 36-1AP60	175-280	3RT25 36-1NP30				

Size S3



3RT254-1N.30

65		30		25		100		90		1		1		20 ... 33	3RT25 35-1AC20
														175 ... 280	3RT25 35-1AK60
80	40	30	40	30	125	105	1	1	1	20 ... 33	3RT25 45-1NB30	20-33	3RT25 45-1NP30		
														175 ... 280	3RT25 45-1NP30

For further voltages, see page 2/55.

For auxiliaries and accessories, see page 2/72-2/89.

For spare parts, see page 2/101-2/106.

For technical data, see page 2/175-2/176.

For int. circuit diagrams, see page 2/198-2/203.

For dimension drawings, see page 2/224.

1) For changing polarity; not suitable for reversing.

2) Size S00 and S0 contactors are also available with spring-type terminals. Replace the 8th digit of the order no. with a "2" e.g. "3RT25 16-2AK60"

3) Size S00:

Coil voltage tolerance
at 50 Hz: 0.8 ... 1.1 x U_s
at 60 Hz: 0.85 ... 1.1 x U_s

4) The NC contact can switch up to 5 HP.



3RT, 3RH Contactors for Special Applications

3RH21 contactor relays

Overview

DC operation

IEC 60947-4-1, EN 60947-4-1, for requirements according to IEC 60077-1 and IEC 60077-2.

The contactor relays are finger-safe according to EN 50274. The size S00 contactor relays have spring-type connections for all terminals.

Ambient temperature

The permissible ambient temperature for operation of the contactor relays (across the full coil operating range) is -40 to +70 °C.

Uninterrupted duty at temperatures > +60 °C reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

Control and auxiliary circuits

The solenoid coils of the contactor relays have an extended coil operating range from 0.7 to $1.25 \times U_s$ and are fitted as standard with suppressor diodes to provide protection against overvoltage. The opening delay is consequently 2 to 5 ms longer than for standard contactors.

Application

For operation in installations which are subject both to considerable variations in the control voltage and to high ambient temperatures, e. g. railway applications under extreme climatic conditions, rolling mills, etc.

Also for control supply voltages with battery buffer for longer operating times should the battery charging fail.

Contactor relays without series resistor

Control and auxiliary circuits

These contactor relays have an extended operating range from 0.7 to $1.25 \times U_s$; the solenoid coils are fitted with a suppressor diode. An additional series resistor is not required.

Note:

An additional auxiliary switch block cannot be mounted.


Side-by-side mounting

A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C ≤ 70 °C.

Contactor relays with series resistor

Control and auxiliary circuits

The DC solenoid systems of the contactor relays are modified (to hold-in coil) by means of a series resistor. The suppressor diode is integrated.

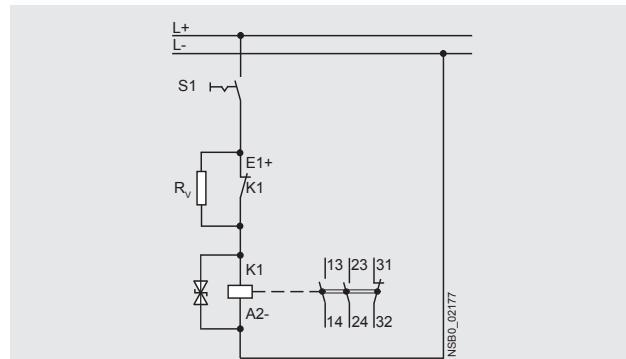

A 4-pole auxiliary switch block (according to EN 50005) can be fitted additionally.

Side-by-side mounting

Side-by-side mounting is permitted at ambient temperatures up to 70 °C.



3RT, 3RH Contactors for Special Applications

3RH21 contactor relays

Selection and ordering data

DC operation · DC solenoid system

Spring-type terminals

For screw and snap-on mounting onto standard mounting rail

Solenoid coil fitted with suppressor diode



3RH21 22-2K.40



3RH21 22-2K.40-0LA0

Rated operational current I_e /AC-15/AC-14 T_u : 70 °C at				Contacts	Rated control supply voltage U_s	Spring-type terminals	Weight approx.
230 V	400 V	500 V	690 V	Version			
				A A A A	NO NC V DC		
							kg


3RH21 contactor relays

Size S00

Without series resistor

Terminal designations according to EN 50011


2 NO + 2 NC, identification number 22E

10 3 2 1 2 2¹⁾ 24 1103RH21 22-2KB40
3RH21 22-2KF400.300
0.300

With series resistor

Terminal designations according to EN 50005

2 NO + 1 NC, identification number 21E

10 3 2 1 2 2²⁾ 24 1103RH21 22-2KB40-0LA0
3RH21 22-2KF40-0LA00.300
0.300

1) It is not possible to mount an auxiliary switch block.

2) 4-pole auxiliary switch block according to EN 50005 can be mounted.

More information

Contactors	Type	3RH21 ..	
Upright mounting position			
• Contactors with series resistor		Special version (on request)	
• Contactors without series resistor		Special version (on request)	
Ambient temperature			
• During operation		°C	-40 ... +70
• During storage		°C	-55 ... +80
Solenoid coil operating range		0.7 ... 1.25 x U_s	
Power consumption of the solenoid coils		For cold coil and 1.0 x U_s	
• Contactors with series resistor		W	13
- Closing		W	4
- Closed		W	2.8
• Contactors without series resistor		W	2.8
- Closing		W	2.8
- Closed		W	2.8

All specifications and technical specifications not mentioned here are identical to those of the standard contactor relays.



Contactors and Contactor Assemblies

3RT, 3RH Contactors for Special Applications

3RT20 motor contactors, 7.5 ... 25 HP

Overview

DC operation

IEC 60947-4-1, EN 60947-4-1,
for requirements according to IEC 60077-1 and IEC 60077-2.

The contactors are finger-safe according to EN 50274. The contactors have spring-type connections as well as screw connections. The size S00 and S0 contactors have spring-type connections for all terminals.

Ambient temperature

The permissible ambient temperature for operation of the contactors (across the full coil operating range) is -40 to +70 °C.

Uninterrupted duty at temperatures > +60 °C reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

Control and auxiliary circuits

The solenoid coils of the contactor relays have an extended coil operating range from 0.7 to 1.25 or $1.3 \times U_s$ and are fitted as standard with suppressor diodes. The opening delay is consequently 2 to 5 ms longer than for standard contactors.

Application

For operation in installations which are subject both to considerable variations in the control voltage and to high ambient temperatures, e. g. railway applications under extreme climatic conditions, rolling mills, etc.

Also for control supply voltages with battery buffer for longer operating times should the battery charging fail.

Contactors without series resistor

Control and auxiliary circuits

These contactors have an extended operating range from 0.7 to $1.25 \times U_s$; on size S00 the coils are fitted with suppressor diodes, on size S0 with varistors. An additional series resistor is not required.

Note:

An additional auxiliary switch block cannot be mounted.

Side-by-side mounting


A clearance of 10 mm is required for side-by-side mounting at ambient temperatures $> 60^\circ\text{C} \leq 70^\circ\text{C}$.

3RT20 1. contactors with series resistor

Control and auxiliary circuits

The solenoid coils of the contactors have an extended coil operating range from 0.7 to $1.25 \times U_s$ and are fitted as standard with suppressor diodes to provide protection against overvoltage.

The DC solenoid systems of the contactors are modified (to holding excitation) by means of a series resistor.

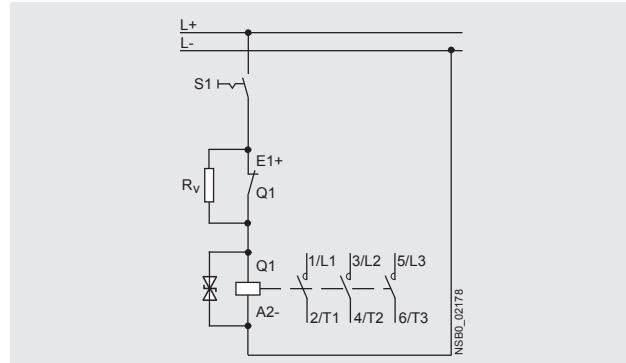

The size S00 contactors are supplied prewired with a plug-on module containing the series resistor. The suppressor diode is integrated. A 4-pole auxiliary switch block (according to EN 50005) can be fitted additionally.

A circuit diagram showing the terminals is labeled on each contactor. One NC of the auxiliary contacts is required for the series resistor function. The selection and ordering data shows the number of additional, unassigned auxiliary contacts. With size S00 it is possible to extend the number of auxiliary contacts.

Side-by-side mounting

At ambient temperatures up to 70 °C, the size S00 contactors and contactor relays are allowed to be mounted side by side.

3RT20 2. contactors with solid-state operating mechanism, extended operating range

Control and auxiliary circuits

The solenoid coils of the contactors have an extended coil operating range from 0.7 to $1.3 \times U_s$ and are fitted as standard with varistors to provide protection against overvoltage.

The contactors are energized via upstream control electronics which ensure the coil operating range of 0.7 to $1.3 \times U_s$ at an ambient temperature of 70 °C. They are supplied as complete units with integrated coil electronics. A varistor is integrated for damping opening surges in the coil.

The mounting possibilities for auxiliary switches correspond to those of the standard contactors for switching motors in the matching size (see page 2/64).

Side-by-side mounting

Side-by-side mounting is permitted at ambient temperatures up to 70 °C for these contactor versions in size S0.



3RT, 3RH Contactors for Special Applications

3RT20 motor contactors, 7.5 ... 25 HP

Selection and ordering data

DC operation · DC solenoid system

Spring-type terminals

For screw and snap-on mounting onto standard mounting rail

Solenoid coil fitted with suppressor diode (S00)



3RT20 1.-2K.4.



3RT20 1.-2K.42-0LA0

Rated data AC-3	Ratings of induction motors at					Auxiliary contacts		Rated control supply voltage U_s	Spring-type terminals	Weight approx.
Operational current I_e at	400 V A	200 V HP	230 V HP	460 V HP	575 V HP	Ident. No.	Version	V DC	Order No.	kg


3RT20 contactors for switching motors

Size S00


Without series resistor⁴⁾

Terminal designations according to EN 50012 or EN 50005

- 1 NO, identification number **10E**



- 1 NC, identification number **01**



12	--	3	7.5	10	10E¹⁾	1	--	24		
12	--	3	7.5	10	01¹⁾	--	1	24		

3RT20 17-2KB41
3RT20 17-2KG41

0.300
0.300

12	--	3	7.5	10	01¹⁾	--	1	24		
12	--	3	7.5	10	01¹⁾	--	1	24		

3RT20 17-2KB42
3RT20 17-2KG42

0.300
0.300

16	--	5	10	10	--²⁾	--	^{1³⁾}	24		
16	--	5	10	10	--²⁾	--	^{1³⁾}	24		

3RT20 18-2KB42-0LA0
3RT20 18-2KG42-0LA0

0.300
0.300

16	--	5	10	10	--²⁾	--	^{1³⁾}	24		
16	--	5	10	10	--²⁾	--	^{1³⁾}	24		

For accessories and spare parts, see page 2/72-2/75.

¹⁾ It is not possible to mount an auxiliary switch block. A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C.

²⁾ One 4-pole auxiliary switch block according to EN 50005 can be mounted; no distance required up to 70 °C.

³⁾ NC contact cannot be used because it is required for switching the series resistor.

⁴⁾ Versions available with screw terminals.

DC operation · DC solenoid system

Spring-type terminals

For screw and snap-on mounting onto standard mounting rail

Solenoid coil fitted with varistor (S0)



3RT20 2.-2K.40



3RT20 2.-2X.40-0LA2


Rated data		Auxiliary contacts		Rated control supply voltage U_s		Spring-type terminals		Weight approx.
AC-3	Operational current I_e at	Ident. No.	Version	NO	NC	V DC	Order No.	
400 V A	200 V HP	230 V HP	460 V HP	575 V HP				kg

3RT20 contactors for switching motors

Size S0

Terminal designations according to EN 50012

1 NO + 1 NC, identification number **11E**



Without series resistor¹⁾

16	--	5	10	15	11E	1	1	24	3RT20 25-2KB40	0.600
								125	3RT20 25-2KG40	0.600
25	--	7.5	15	20	11E	1	1	24	3RT20 26-2KB40	0.600

32	--	10	20	25	11E	1	1	24	3RT20 27-2KB40	0.600
								125	3RT20 27-2KG40	0.600

With solid-state operating mechanism

16	--	5	10	15	11E	1	1	24	3RT20 25-2XB40-0LA2	0.580
								125	3RT20 25-2XG40-0LA2	0.580
25	--	7.5	15	20	11E	1	1	24	3RT20 26-2XB40-0LA2	0.580

32	--	10	20	25	11E	1	1	24	3RT20 26-2XG40-0LA2	0.580
								125	3RT20 27-2XB40-0LA2	0.580
38	--	10	25	25	11E	1	1	24	3RT20 27-2XG40-0LA2	0.580
								125	3RT20 28-2XB40-0LA2	0.580

For accessories and spare parts, see page 2/72-2/75.

¹⁾ It is not possible to mount an auxiliary switch block. A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C.

More information

Contactors	Type	3RT20 17	3RT20 2.	3RT20 2.-2XB40-0LA2	3RT20 2.-2XF40-0LA2
Ambient temperature					
• During operation	°C	-40 ... +70			
• During storage	°C	-55 ... +80			
Solenoid coil operating range	DC	0.7 ... 1.25 x U_s	0.7 ... 1.3 x U_s		
Power consumption of the solenoid coils					
For cold coil and 1.0 x U_s					
• Contactors with series resistor	- Closing	W	13	--	--
	- Closed	W	4	--	--
• Contactors without series resistor	- Closing	W	2.8	4.5	--
	- Closed	W	2.8	4.5	--
• Contactors with solid-state operating mechanism	- Closing	W	--	--	6.7
	- Closed	W	--	--	13.2
				0.8	1.56

All specs and technical specs not mentioned here are identical to those of the standard contactors for switching motors.



Contactors and Contactor Assemblies

Contactors for Special Applications

3RT26 capacitor contactors

AC operation

IEC 60947-5, DIN EN 60947-5-1, (VDE 0660 Part 200)

The contactors are suitable for use in any climate and are finger safe per DIN 50274.

The 3RT26 capacitor contactors are application specific variants of the size S00 to S2 SIRIUS Innovations contactors. The capacitors are precharged by means of the mounted leading NO contacts and resistors; only then do the main contacts close.

This prevents disturbances in the power system and welding of the contactors.

Only discharged capacitors are permitted to be switched on with capacitor contactors. Recommendation: use discharge chokes for parallel connection with the capacitors.

The capacitor contactors of size S00 contain either 1NO or 1NC in the basic unit and another unassigned NC contact in the auxiliary switch block fitted to the basic unit.

The auxiliary switch block which is snapped onto the capacitor contactor of sizes S0 contains the three leading NO contacts and one standard NO contact, which is unassigned.

The capacitor contactors of size S2 can be fitted additionally with a 2-pole auxiliary switch on the right side (2 NO, 2 NC or 1 NO + 1 NC), type 3RH19 21-1EA.. for lateral mounting.

For the capacitor making and breaking capacity of the basic 3RT20 contactor variant, see the technical data.

Selection and ordering data

AC operation

AC-6b utilization category For switching three-phase capacitors at an ambient temperature of 60 °C ²⁾					Current	Auxiliary contacts, unassigned	Rated control supply voltage U_s ¹⁾³⁾	Screw connection	Weight approx.	
Phase	1Ø	200/208	230/240	460/480	575/600			Order No.	kg	
kvar	kvar	kvar	kvar	kvar			AC			
For screwing and snapping onto 35 mm standard mounting rail										
3RT26 17-1AK63	• Size S00	1Ø	3.6	4	8.3	10	18	1NO / 1NC 24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	3RT26 17-1AB03 3RT26 17-1AK63 3RT26 17-1AP63	0.24
		3Ø	6.2	6.9	14	17				
3RT2637-1NF35	• Size S0	1Ø	4.8	5.3	11	13	24	1NO / 2NC 24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	3RT26 25-1AC25 3RT26 25-1AK65 3RT26 25-1AP65	0.49
		3Ø	8.3	9.1	18	23				
	• Size S2	1Ø	5.8	6.4	13	16	29	1NO / 2NC 24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	3RT26 26-1AC25 3RT26 26-1AK65 3RT26 26-1AP65	0.49
		3Ø	10	11	22	28				
	• Size S2	1Ø	6.6	7.3	15	18	33	1NO / 2NC 24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	3RT26 27-1AC25 3RT26 27-1AK65 3RT26 27-1AP65	0.49
		3Ø	11	13	25	31				
	• Size S2	1Ø	8.6	9.5	20	24	43	1NO / 2NC 24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	3RT26 28-1AC25 3RT26 28-1AK65 3RT26 28-1AP65	0.59
		3Ø	15	16	33	41				
	• Size S2	1Ø	14	16	33	40	72A	2 NC 23-33 VUC 83-155 VUC 175-280 VUC	3RT26 36-1NB35 3RT26 36-1NF35 3RT26 36-1NP35	1.11
		3Ø	25	27	55	69				
	• Size S2	1Ø	20	22	45	54	98A	2 NC 20-33 VUC 83-155 VUC 175-280 VUC	3RT26 37-1NB35 3RT26 37-1NF35 3RT26 37-1NP35	1.11
		3Ø	34	38	75	94				

1) Coil voltage tolerance: 0.85 ... 1.1 x U_s .

2) A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C

For further voltages, see page 2/55.

For auxiliaries and accessories, see page 2/72-2/89.

For technical data, see page 2/177.

For wiring diagram, see page 2/205.

For dimension drawings, see page 2/225.

DC Coil Selection for 3RT261 only

Coil Code	B4	W4	E4	F4	G4	M4
DC	24 V	48 V	60 V	110 V	125 V	220 V

UC Coil Selection for 3RT262

Coil Code	NB3	NF3	NP3
UC	21-28V	95-130V	200-280V

UC Coil Selection for 3RT263

Coil Code	B3	F3	P3
	20-33V	83-155V	175-280V

3) at upper limit = 1.1 x U_s



Contactors for Special Applications

3RT20 coupling contactors (interface) for switching motors, 3-pole

AC and DC operation

IEC 60947, EN 60947.

The 3RT20 coupling contactors for switching motors are tailored to the special requirements of working with electronic controls.

The 3RT20 1 coupling contactors cannot be expanded with auxiliary switch blocks.

Coupling contactors have a low power consumption and an extended solenoid coil operating range.


Depending on the version, the solenoid coils are supplied either without overvoltage damping or with a diode, suppressor diode or varistor connected as standard.

Selection and ordering data

DC operation



3RT2015-1HB41



3RT2015-2HB41

Surge suppressor	Ratings Utilization category		Auxiliary contacts		Screw connection	Spring-type connection	Weight approx.
	AC-3		Ident. no.	Design no.	Order No.	Order No.	(screw/spring)
	Maximum inductive current	Maximum ¹⁾ horsepower ratings at 460 V					
	Amps	HP	NO	NC			kg

For screwing and snapping onto 35 mm standard mounting rail

• Size S00

Terminal designations according to EN 50 012

Rated control supply voltage $U_s = \text{DC } 24 \text{ V}$, coil voltage tolerance **0.7 to 1.25} \times U_s**
Power consumption of the coils **2.8 W** at 24 V (no auxiliary switch blocks can be mounted)

Diode, varistor or RC element can be mounted	7	3	10E 01	1 – 1	3RT20 15-1HB41 3RT20 15-1HB42	3RT20 15-2HB41 3RT20 15-2HB42	0.28/0.30
Diode integrated	7	3	10E 01	1 – 1	3RT20 15-1J B41 3RT20 15-1J B42	3RT20 15-2J B41 3RT20 15-2J B42	0.28/0.30
Suppressor diode integrated	7	3	10E 01	1 – 1	3RT20 15-1KB41 3RT20 15-1KB42	3RT20 15-2KB41 3RT20 15-2KB42	0.28/0.30
Diode, varistor or RC element can be mounted	9	5	10E 01	1 – 1	3RT20 16-1HB41 3RT20 16-1HB42	3RT20 16-2HB41 3RT20 16-2HB42	0.28/0.30
Diode integrated	9	5	10E 01	1 – 1	3RT20 16-1J B41 3RT20 16-1J B42	3RT20 16-2J B41 3RT20 16-2J B42	0.28/0.30
Suppressor diode integrated	9	5	10E 01	1 – 1	3RT20 16-1KB41 3RT20 16-1KB42	3RT20 16-2KB41 3RT20 16-2KB42	0.28/0.30
Diode, varistor or RC element can be mounted	12	7.5	10E 01	1 – 1	3RT20 17-1HB41 3RT20 17-1HB42	3RT20 17-2HB41 3RT20 17-2HB42	0.28/0.30
Diode integrated	12	7.5	10E 01	1 – 1	3RT20 17-1J B41 3RT20 17-1J B42	3RT20 17-2J B41 3RT20 17-2J B42	0.28/0.30
Suppressor diode integrated	12	7.5	10E 01	1 – 1	3RT20 17-1KB41 3RT20 17-1KB42	3RT20 17-2KB41 3RT20 17-2KB42	0.28/0.30

For technical data, see page 2/178.

For int. circuit diagrams, see page 2/197-2/202.

For dimension drawings, see page 2/216.

1) Complete HP ratings on page 2/131



Contactors for Special Applications


3RT20 coupling contactors (interface) for switching motors

Selection and ordering data

DC operation



3RT2015-1VB41



3RT2015-2VB41



3RT2024-1KB40

Surge suppressor	Ratings Utilization category	Auxiliary contacts		Screw connection	Spring-type connection	Weight approx. (screw/spring)
	AC-3	Ident. no.	Design no.	Order No.	Order No.	
	Maximum inductive current	Maximum horsepower ratings at 460 V				
Amps	HP	NO	NC			kg

For screwing and snapping onto 35 mm standard mounting rail

• Size S00

Terminal designations according to EN 50 012

Rated control supply voltage U_s = DC 24 V, coil voltage tolerance **0.85 to 1.85 $\times U_s$**
Power consumption of the coils **1.6 W** at 24 V (no auxiliary switch blocks can be mounted)

Diode, varistor or RC element can be mounted	7	3	10E 01	1 – 1	3RT20 15-1MB41-0KT0 3RT20 15-1MB42-0KT0	3RT20 15-2M B41-0KT0 3RT20 15-2M B42-0KT0	0.28/0.30
Diode integrated	7	3	10E 01	1 – 1	3RT20 15-1VB41 3RT20 15-1VB42	3RT20 15-2VB41 3RT20 15-2VB42	0.28/0.30
Suppressor diode integrated	7	3	10E 01	1 – 1	3RT20 15-1SB41 3RT20 15-1SB42	3RT20 15-2SB41 3RT20 15-2SB42	0.28/0.30
Diode, varistor or RC element can be mounted	9	5	10E 01	1 – 1	3RT20 16-1MB41-0KT0 3RT20 16-1MB42-0KT0	3RT20 16-2M B41-0KT0 3RT20 16-2M B42-0KT0	0.28/0.30
Diode integrated	9	5	10E 01	1 – 1	3RT20 16-1VB41 3RT20 16-1VB42	3RT20 16-2VB41 3RT20 16-2VB42	0.28/0.30
Suppressor diode integrated	9	5	10E 01	1 – 1	3RT20 16-1SB41 3RT20 16-1SB42	3RT20 16-2SB41 3RT20 16-2SB42	0.28/0.30
Diode, varistor or RC element can be mounted	12	7.5	10E 01	1 – 1	3RT20 17-1MB41-0KT0 3RT20 17-1MB42-0KT0	3RT20 17-2M B41-0KT0 3RT20 17-2M B42-0KT0	0.28/0.30
Diode integrated	12	7.5	10E 01	1 – 1	3RT20 17-1VB41 3RT20 17-1VB42	3RT20 17-2VB41 3RT20 17-2VB42	0.28/0.30
Suppressor diode integrated	12	7.5	10E 01	1 – 1	3RT20 17-1SB41 3RT20 17-1SB42	3RT20 17-2SB41 3RT20 17-2SB42	0.28/0.30

• Size S0

Rated control supply voltage U_s = DC 24 V, coil voltage tolerance **0.7 to 1.25 $\times U_s$**
Power consumption of the coils **4.5 W** at 24 V no auxiliary switch blocks can be mounted.

Varistor integrated	12	7.5	11E	1 1	3RT20 24-1KB40	3RT20 24-2KB40	0.58/0.60
	16	10	11E	1 1	3RT20 25-1KB40	3RT20 25-2KB40	0.58/0.60
	25	15	11E	1 1	3RT20 26-1KB40	3RT20 26-2KB40	0.58/0.60
	32	20	11E	1 1	3RT20 27-1KB40	3RT20 27-2KB40	0.58/0.60

For technical data, see page 2/178.

For int. circuit diagrams, see page 2/197-2/202.

For dimension drawings, see page 2/216.



Contactors & Relays for Safety Applications

3RT, 3TF safety contactors and 3RH2, 3TH2 safety control relays

Applications

“Safety” Contactors

Safety rated contactors are required to have mirrored contact construction according to IEC 60947-4-1 Annex F. A mirror contact is a Normally Closed (NC) auxiliary contact which can not be closed simultaneously with a Normally Open (NO) main contact.

In some industries, such as automotive, requirements have been established that a safety rated contactor must also have permanently mounted auxiliary contact blocks. See page 2/29 for Contactors with permanently mounted auxiliary contacts.

Siemens Contactors for “Safety” applications:

All Siemens standard 3RT, 3TF6, 40HN & 40PH Contactors are provided with positively driven (mirror) contacts which meet or exceed the criteria for “Safety Contactors” according to IEC 60947-4 Annex F which describes the requirements for mirror contact performance. When applying Safety Contactors in safety circuits, the NC auxiliary contacts must be wired in series or parallel and must be used as monitoring contacts with feedback to the safety evaluation device (i.e. safety relay or failsafe logic controller).

“Safety” Control Relays

Safety rated control relays are required to have positively driven contact elements according to IEC 60947-5-1 Annex L. Positively driven contact elements are a combination of NO auxiliary contacts and NC auxiliary contacts whose construction prevents them from being closed simultaneously.

Siemens Control Relays for “Safety” applications:

All SIRIUS 3RH control relays (with at least 1 NC contact) meet or exceed the criteria for “Safety Control Relays” according to IEC 60947-5-1 Annex L. This is true for the basic 3RH relay with or without an additional auxiliary contact block.



3RT20 2.-1A.00



3RT10 7.-6A..6



3RH29 21.-1F



3RH29 21.-1DA 11



3RH21



3RH24



3RH2911-2HA..

Frame size	Contactors	Auxiliary contact block
S00	3RT201	3RH2911
	3RT231	
	3RT251	
	3RT261	3RH1911
S0	3RT202	3RH2921
	3RT232	
	3RT252	
	3RT262	3RH2921
S2	3RT203	3RH2921
	3RT233	
	3RT253	
	3RT263	
S3	3RT204	3RH2921
	3RT234	
	3RT244	
	3RT264	
S6	3RT105	3RH1921
	3RT145	
S10	3RT106	3RH1921
	3RT126	
	3RT146	
S12	3RT107	3RH1921
	3RT127	
	3RT147	
	3TF6	3TY7561-1UA00

Frame size	Control Relays	Auxiliary contact block
S00	3RH21	3RH2911
	3RH24	
	3TH20	3TX44

For contactors, see pages 2/8-2/11.

For auxiliaries contact blocks, see pages 2/72-2/74.

For control relays, see pages 2/56-2/58.

For auxiliaries contact blocks, see page 2/72-2/74..



Contactors & Relays for Safety Applications

3RT safety contactors, 3RH2 safety control relays with permanently mounted auxiliary contact blocks


Application

"Safety" Contactors

Safety rated contactors are required to have mirrored contact construction according to IEC 60947-4 Annex F. A mirror contact is a Normally Closed (NC) auxiliary contact which can not be closed simultaneously with a Normally Open (NO) main contact. In some industries, such as Automotive, the auxiliary contact blocks are required to be permanently attached to meet the requirements of "unintentional misuse" as specified in IEC 60292, paragraph 3.12. Tested by SUVA.

**"Safety" Control Relays**

Safety rated control relays are required to have positively driven contact elements according to IEC 60947-5-1 Annex L. Positively driven contact elements are a combination of NO auxiliary contacts and NC auxiliary contacts whose construction prevents them from being closed simultaneously. In some industries, such as automotive, the auxiliary contact blocks are required to be permanently attached to meet the requirements of "unintentional misuse" as specified in IEC 60292, paragraph 3.12. Tested by SUVA.



Application

Frame Size	Max. current		Single-phase HP ratings		Three-phase HP ratings			Auxiliary contacts			Screw Terminals Order No.	Spring-Type Terminals ¹⁾ Order No.
	AC3	AC1	115V	220/240V	200V	230V	460V	575V	Ident. No.	NO	NC	
	A	A	HP	HP	HP	HP	HP	HP				

Contactors with permanently mounted auxiliary contact blocks

S00	6	18	1/4	3/4	1 1/2	2	3	5	22E	2	2	3RT2015-1●●●4-3MA0	3RT2015-2●●●4-3MA0
	9	22	1/3	1	2	3	5	7 1/2	22E	2	2	3RT2016-1●●●4-3MA0	3RT2016-2●●●4-3MA0
	12	22	1/2	2	3	3	7 1/2	10	22E	2	2	3RT2017-1●●●4-3MA0	3RT2017-2●●●4-3MA0
	16	22	1	2	3	5	10	10	22E	2	2	3RT2018-1●●●4-3MA0	3RT2018-2●●●4-3MA0
S0	9	40	1	1	2	3	5	7 1/2	22E	2	2	3RT2023-1●●●4-3MA0	3RT2023-2●●●4-3MA0
	12	40	1	2	3	3	7 1/2	10	22E	2	2	3RT2024-1●●●4-3MA0	3RT2024-2●●●4-3MA0
	17	40	1	3	5	5	10	15	22E	2	2	3RT2025-1●●●4-3MA0	3RT2025-2●●●4-3MA0
	25	40	2	3	7 1/2	7 1/2	15	20	22E	2	2	3RT2026-1●●●4-3MA0	3RT2026-2●●●4-3MA0
	32	50	2	5	10	10	20	25	22E	2	2	3RT2027-1●●●4-3MA0	3RT2027-2●●●4-3MA0
	38	50	3	5	10	10	25	25	22E	2	2	3RT2028-1●●●4-3MA0	3RT2028-2●●●4-3MA0
S2	40	60	3	7 1/2	10	15	30	40	22E	2	2	3RT2035-1●●●4-3MA0	3RT2035-3●●●4-3MA0
	50	70	3	10	15	15	40	50	22E	2	2	3RT2036-1●●●4-3MA0	3RT2036-3●●●4-3MA0
	65	80	5	10	20	20	50	50	22E	2	2	3RT2037-1●●●4-3MA0	3RT2037-3●●●4-3MA0
	80 ⁴⁾	90	5	15	20	25	50	60	22E	2	2	3RT2038-1●●●4-3MA0	3RT2038-3●●●4-3MA0
S3	80	120	7 1/2	15	25	30	60	75	22E	2	2	3RT2045-1●●●4-3MA0	3RT2045-3●●●4-3MA0
	95	120	10	20	30	30	75	100	22E	2	2	3RT2046-1●●●4-3MA0	3RT2046-3●●●4-3MA0
S6	150	185	--	30	50	60	125	150	22E	2	2	3RT1055-6●●●6-3PA0	—
	185	215	--	30	60	75	150	200	22E	2	2	3RT1056-6●●●6-3PA0	—
S10	225	275	--	--	60	75	150	200	22E	2	2	3RT1064-6●●●6-3PA0	—
	265	330	--	--	75	100	200	250	22E	2	2	3RT1065-6●●●6-3PA0	—
	300	330	--	--	100	125	250	300	22E	2	2	3RT1066-6●●●6-3PA0	—

Control circuit coil options: Replace ●●● with the desired code

Frame Size S00 - S0	●●●	Frame Size S2	●●●	Frame Size S3	●●●	Frame Size S6 - S10	●●●
120 V AC	AK6	120 V AC	AK6	120 V AC **	AK6	23 ... 26 V UC*, conventional coil	AB3
120 V AC, integrated varistor	CK6	120 V AC w/ Varistor	CK6	24V DC	KB4	21-27 V UC*, solid state coil w/ PLC interface	NB3
230 V AC	AP0	24 V DC w/Varistor	KB4	w/ integrated varistor	NB3	110 ... 127 V UC*, conventional coil	AF3
24 V DC	BB4			24V AC/DC			
24 V DC, integrated varistor	DB4			w/integrated varistor			
24 V DC, integrated diode assy.	FB4						

*UC coil: accepts DC voltage or AC voltage, 40 to 60 Hz.

Frame Size	Max. current at 240 V ²⁾	Rated control supply voltage U_s	Auxiliary contacts			Screw Terminals ³⁾ Order No.	Spring Terminals ³⁾ Order No.
	A		Indent. No.	NO	NC		
Control relays with permanently mounted auxiliary contact blocks							
S00-S00	10	110 V AC, 50 Hz / 120 V AC, 60 Hz	44E	4	4	3RH2244-1AK60	3RH2244-2AK60
	10	24 V DC	44E	4	4	3RH2244-1BB40	3RH2244-2BB40
	10	110 V AC, 50 Hz / 120 V AC, 60 Hz	62E	6	2	3RH2262-1AK60	3RH2262-2AK60
	10	24 V DC	62E	6	2	3RH2262-1BB40	3RH2262-2BB40

For other voltages see page 2/55.

For accessories, see pages 2/79-2/84.

For spare parts, see pages 2/101-2/104.

For technical data, see pages 2/128-2/149.

For description, see pages 2/111-2/112.

For int. circuit diagrams, see page 2/197-2/203.

For dimension drawings, see pages 2/216-2/223.

1) All terminals are spring loaded on frame size S00 and S0.

Only the coil and auxiliary contact terminals are spring loaded on frame sizes S2 & S3.

2) For AC-15/AC-14, max current for front mounted auxiliary contacts = 6 A.

3) The 3RH22 control relays are also available with ring lug terminals. Replace the 8th digit of the order number with a "4", e. g. 3RH2244-4AK60

4) Max UL FLA = 65A at 460V



Function Modules for Mounting onto SIRIUS 3RT2 Contactors

Introduction

Overview

The function modules for mounting onto contactors enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components. They include the key control functions required for the particular starter, e. g. timing and interlocking, and can be connected to the control system by either parallel wiring or through IO-Link or AS-Interface.

Version	SIRIUS function modules for parallel wiring	SIRIUS function modules for IO-Link ¹⁾	SIRIUS function modules for AS-Interface ¹⁾
For direct-on-line starting	Timing relays: ON or OFF-delay with semiconductor output With screw or spring-type terminals		
For reversing starting	Wiring modules for sizes S00, S0 & S2 With screw or spring-type terminals - (with screw terminals for main and control circuit) 	1 function module for size S00, S0 & S2, screw and spring-type connection, plus the respective wiring modules ¹⁾ 	1 function module for size S00, S0 & S2, screw and spring-type connection, plus the respective wiring modules ¹⁾ 
For wye-delta starting	1 function module for size S00, S0 & S2, screw and spring-type connection of the contactors, plus the respective wiring modules ²⁾ 	For wye-delta starting: 1 function module for size S00, S0 & S2, plus screw and spring-type connection, plus the respective wiring modules ²⁾ 	For wye-delta starting: 1 function module for size S00, S0 & S2, plus screw and spring-type connection, plus the respective wiring modules ²⁾ 
Accessories	Sealable covers 	Operator panel for autonomous controlling of up to 4 starters Module connector for the grouping of starters Connection cable between the operator panel and the starter group Sealable covers 	AS-Interface addressing units Sealable covers 

¹⁾ Use of the communication-capable function modules for IO-Link or AS-Interface requires contactors with communication interface (see pages 2/32).

²⁾ The modules for the control current wiring, which are included in the wiring kit, are not required.

Note:

When the function modules are used, no other auxiliary switches are allowed to be mounted on the basic units.



Function Modules for Mounting onto SIRIUS 3RT2 Contactors

SIRIUS function modules

Overview

Simply by being plugged in place, the SIRIUS function modules enable different functionalities required for the assembly of starters to be realized in the starter. The function modules and wiring kits help to reduce the wiring work within the starter practically to zero.

SIRIUS function modules for direct-on-line starting

The electronic timing relays which can be mounted onto the contactor are available in these versions:

- Sizes S00 and S0 for applications in the range from 24 to 240 V AC/DC (wide voltage range)
- Size S2 for applications in either the range from 24 to 90 V AC/DC or 90 to 240 V AC/DC

Both the electrical and mechanical connection are made by simple snapping on and locking.

A protection circuit (varistor) is integrated in each module.

The electronic timing relay with semiconductor output uses two contact legs to actuate the contactor underneath by means of a semiconductor after the set time t has elapsed.

The switching state feedback is performed by a mechanical switching state indicator (plunger). In addition, the auxiliary switches in the contactors are freely accessible and can be used for feedbacks to the control system or for signal lamps.

A sealable cover is available to protect against careless adjustment of the set times.

SIRIUS function modules for reversing starting

The wiring kits for reversing starters enable the cost-effective assembly of contactor assemblies. They can be used for all applications with reversing duty up to 50 HP.

For a detailed description see page 2/43.

SIRIUS function modules for wye-delta starting

Both interlocking and timing functions are required for the assembly of wye-delta starters. With the function modules for wye-delta starting and the matching link modules for the main circuit, these starters can be assembled easily and with absolutely no errors.

The entire sequence in the control circuit is integrated in the snap-on modules. This covers:

- An adjustable wye time t from 0.5 to 60 s
- A non-adjustable dead interval of 50 ms
- Electrical contacting to the contactors by means of coil pick-off (contact legs)
- Feedback of the switching state at the contactor using a mechanical switch position indicator (plunger)
- Electrical interlocking between the contactors

These modules do not require their own terminals and can therefore be used for contactors with both screw and spring-type terminals in the S00, S0 and S2. To start the wye-delta starter, only the first of the three contactors (line contactor) is actuated. All other functions then take place inside the individual modules.

This also offers advantages if the timing function was previously implemented in a controller, as it again results in a significant reduction in the number of PLC outputs, the programming work and the wiring outlay.

The kits for the main circuit include the mechanical interlock, the star jumper, the wiring modules at the top and at the bottom, and the required connecting clips.

A protection circuit (varistor) is integrated in the basic module.

Application

The snap-on function modules for direct-on-line starting are used above all for realizing timing functions independently of the control system.

With the OFF-delay variant of the timing relay it is possible for example for the fan motor for cooling a main drive to be switched off with a delay so that sufficient cooling after operation is guaranteed even if the plant and its control system have already been switched off.

The ON-delay timing relays enable for example the time-delayed starting of several drives so that the summation starting current does not rise too high, which could result in voltage failure.

The function modules for wye-delta starting are mostly used where current-limiting measures for starting a drive are required, e.g. for large fans and ventilators, and a high level of availability is essential at the same time. This technology has been used with success for several decades and has the additional advantage of requiring relatively little know-how. Through the use of function modules, the assembly work with simple standard components is even easier and error-free.

Benefits

The use of snap-on function modules for direct-on-line starting (timing relays) results in the following advantages:

- Reduction of control current wiring
- Prevention of wiring errors
- Reduction of testing costs
- Implementation of timing functions independently of the control system
- Less space required in the control cabinet compared to a separate timing relay
- No additive protection circuit required (varistor integrated)

The use of function modules for wye-delta starting results in the following advantages:

- Operation solely through the line contactor A1/A2 – no further wiring needed
- Reduction of the control current wiring inside the contactor assembly and to the higher-level control system where applicable
- Prevention of wiring errors
- Reduction of testing costs
- Integrated electrical interlocking saves costs and prevents errors
- Less space needed in the control cabinet compared to using a separate timing relay
- Adjustable starting in star mode from 0.5 to 60 s
- Independent of the contactor's control supply voltage (24 to 240 V AC/DC)
- Varistor integrated – no additive protection circuit required
- No control current wiring thanks to plug-in technology and connecting cables
- Mechanically coded assembly enables easy configuration and reliable wiring
- Fewer versions – one module kit for screw and spring-type connection and for the two sizes S00 to S2
- Mechanical interlocking (with wiring kit for the main circuit)



Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT2 contactors, 3-pole – Communication Contactors

2

CONTACTORS AND ASSEMBLIES

Selection and ordering data

- Ideal for diagnostics to the automation controller
- Quickly locate and rectify faults
- Configuration available in Step 7 and TIA Portal
- Easy engineering of parameters
- For DOL, reversing and wye delta starters up to 50 HP
- Manual starter operation with optional operator panel

- Reduces control wiring in the panel
- Available for 24VDC control systems
- Easily snap on IO-Link or AS-Interface modules onto contactors



Frame Size	Amp Ratings		Single-phase HP ratings		Three-phase HP ratings			Auxiliary contacts		Screw Terminals 24 V DC coil Order No.	Spring-type Terminals ¹⁾ 24 V DC coil Order No.	Weight approx. kg	
	AC3	AC1	115V	230V	208V	230V	460V	575V	NO	NC			
3RT 3-pole Contactors													
3RT2018-1BB41-0CC0	S00	7	18	0.25	0.75	1.5	2	3	5	1	0	3RT2015-1BB41-0CC0	3RT2015-2BB41-0CC0
										0	1	3RT2015-1BB42-0CC0	3RT2015-2BB42-0CC0
		9	22	0.33	1	2	3	5	7.5	1	0	3RT2016-1BB41-0CC0	3RT2016-2BB41-0CC0
	S0									0	1	3RT2016-1BB42-0CC0	3RT2016-2BB42-0CC0
		12	22	0.5	2	3	3	7.5	10	1	0	3RT2017-1BB41-0CC0	3RT2017-2BB41-0CC0
		16	22	1	2	3	5	10	10	1	0	3RT2018-1BB41-0CC0	3RT2018-2BB41-0CC0
3RT2028-1BB40-0CC0	S0	9	40	1	1	2	3	5	7.5	1	1	3RT2023-1BB40-0CC0	3RT2024-2BB40-0CC0
		12	40	1	2	3	3	7.5	10	1	1	3RT2024-1BB40-0CC0	3RT2024-2BB40-0CC0
		16	40	1	3	5	5	10	15	1	1	3RT2025-1BB40-0CC0	3RT2025-2BB40-0CC0
		25	40	2	3	7.5	7.5	15	20	1	1	3RT2026-1BB40-0CC0	3RT2026-2BB40-0CC0
		32	50	2	5	10	10	20	25	1	1	3RT2027-1BB40-0CC0	3RT2027-2BB40-0CC0
		38	50	3	5	10	10	25	25	1	1	3RT2028-1BB40-0CC0	3RT2028-2BB40-0CC0
3RT2038-1NB30-0CC0	S2	40	60	3	7.5	10	15	30	40	1	1	3RT2035-1NB30-0CC0	3RT2035-3NB30-0CC0
		50	70	3	10	15	15	40	50	1	1	3RT2036-1NB30-0CC0	3RT2036-3NB30-0CC0
		65	80	5	10	20	20	50	50	1	1	3RT2037-1NB30-0CC0	3RT2037-3NB30-0CC0
		80	90	5	15	20	25	50	60	1	1	3RT2038-1NB30-0CC0	3RT2038-3NB30-0CC0
3RT2045-1NB30-0CC0	S3	80	125	7.5	15	25	30	60	60	1	1	3RT2045-1NB30-0CC0	3RT2045-3NB30-0CC0
		95	130	10	20	30	30	75	75	1	1	3RT2046-1NB30-0CC0	3RT2046-3NB30-0CC0
		110	130	10	20	30	40	75	100	1	1	3RT2047-1NB30-0CC0	3RT2047-3NB30-0CC0

1) All terminals are spring loaded in sizes S00 and S0.

For sizes S2-S3, only the coil and aux contacts are spring loaded.

Communication capable contactors are ideal for starter feedback to the automation level. IO-Link starters in the cabinet save considerable wiring effort. AS-Interface is best suited for distributed systems.

For reversing contactors with communication capability, see pages 2/45-2/49

For accessories, see page 2/33, 2/36, 2/40.

For technical data, see page 2/37, 2/41, 2/42

For description, see page 2/30.

For further information on IO-Link and AS-Interface, see page 2/34-2/35 and 2/38-2/39.




Selection and ordering data



3RA28 16-0EW20



3RA29 13-2AA1



3RA29 13-2BB2

For contactors	Rated control supply voltage U_s ¹⁾	Time setting range t	Screw terminals	Weight approx.	Spring-type terminals ²⁾	Weight approx.
Type	V	s	Order No.	kg	Order No.	kg

Assembly kits for reversing starting

Assembly kits for making 3-pole contactor assemblies					
		The assembly kit contains: Mechanical interlock; 2 connecting clips for 2 contactors, wiring modules on the top and bottom			
3RT20 1.	• For size S00	3RA29 13-2AA1	0.046	3RA29 13-2AA2	0.070
3RT20 2.	• For size S0	3RA29 23-2AA1	0.089	3RA29 23-2AA2	0.112
3RT20 3.	• For size S2 (w/o mechanical interlock, see pg. 2/49)	3RA29 33-2AA1	0.159	3RA29 33-2AA2	0.156

Assembly kits for wye-delta starting

Assembly kits for making 3-pole contactor assemblies					
		The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom			
3RT20 1.	• For size S00	3RA29 13-2BB1	0.051	3RA29 13-2BB2	0.080
3RT20 2.	• For size S0 (only main circuit for version with spring-type terminals)	3RA29 23-2BB1	0.099	3RA29 23-2BB2	0.133
3RT20 3.	• For size S2 (only main circuit for version with spring-type terminals)	3RA29 33-2BB1	0.242	3RA29 33-2BB2	0.182

Function modules for wye-delta starting

The electrical connection between the function module and the contactor assembly is established automatically by snapping on and plugging in the connecting cables.						
		Wye-delta function (varistor integrated)				
3RT20 1.	24 ... 240 AC/DC	0.5 ... 60 (10, 30, 60 selectable)	3RA28 16-0EW20	0.170	3RA28 16-0EW20	0.170
3RT20 2.						
3RT20 3.						

Accessories

Sealable covers for 3RA27, 3RA28, 3RA29	3RA29 10-0	0.002	3RA29 10-0	0.002
--	------------	-------	------------	-------

¹⁾ AC voltage values apply for 50 Hz and 60 Hz.

²⁾ Assembly kits in sizes S0 and S2 are supplied with wiring modules for the main circuit only.


Note:

When the function modules are used, no other auxiliary switches are allowed to be mounted on the basic units.

Function	Function charts
	Timing relay energized
	Contact closed
	Contact open

2 NO contacts (internally connected)

Wye-delta function (varistor integrated)	3RA28 16-0EW20
• 1 NO contact, delayed	A1/A2
• 1 NO contact, instantaneous	Y
	Δ





Function Modules for Mounting onto SIRIUS 3RT2 Contactors

SIRIUS function modules for IO-Link


Overview

The SIRIUS function modules for IO-Link enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components. They include the key control functions required for the particular starter, e. g. timing and interlocking. The electrical and mechanical connection to the contactor is established by snapping on and locking. An additive protection circuit for the individual contactors can be dispensed with completely, and feedback from the contactor contacts is performed with Hall sensors which provide reliable feedback concerning the switching state even under extremely dusty conditions. The starters are connected to the higher-level

control system through IO-Link, with the possibility of connecting up to four starters as a group to one port of the IO-Link master.

Through this type of connection to the control system, a maximum of wiring is saved. The following essential signals are transmitted:


- Availability of the starter in response to an indirect inquiry from the motor starter protector
- Starter operation
- Feedback concerning the switching state of the starter

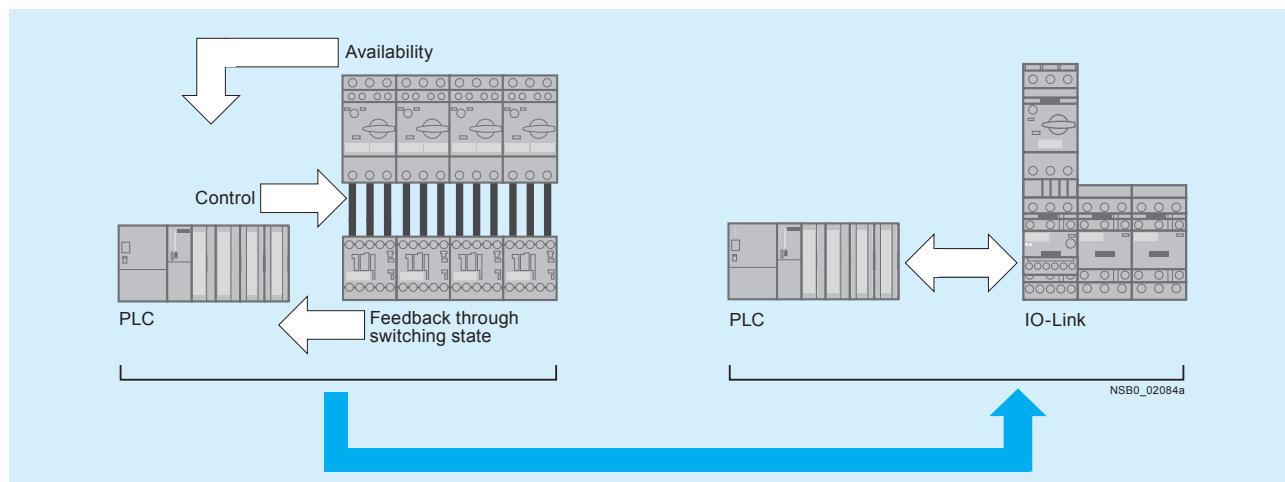

Signal transmission through IO-Link

The inquiry from the motor starter protector does not take place through additional wiring between the auxiliary switch and the module but by means of a voltage inquiry at the contactor input.

This requires the use of communication versions of the contactors with communication interface (see page 2/32).

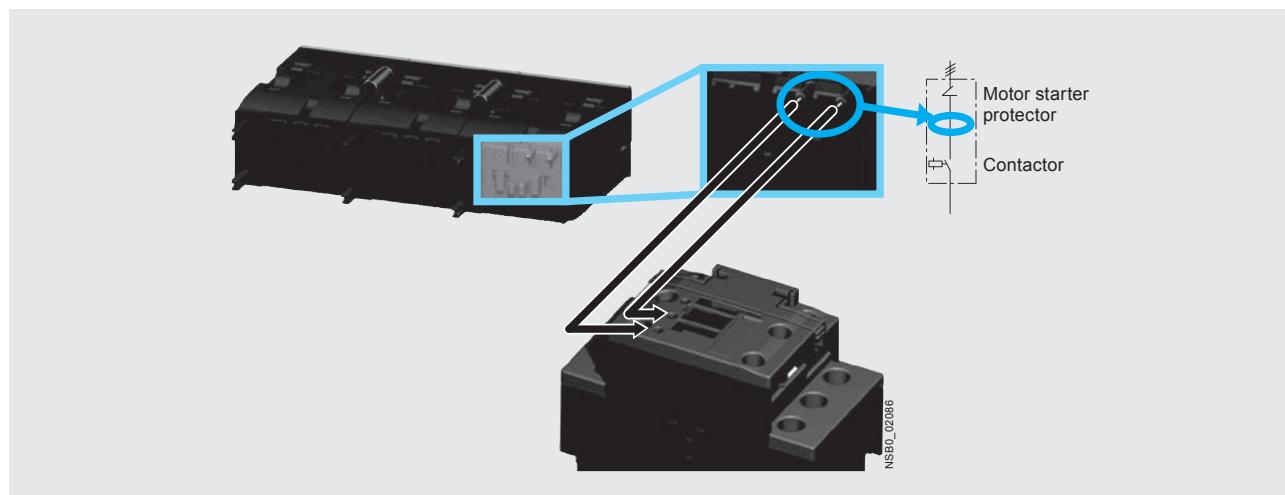

Availability signal through voltage pick-off




Function Modules for Mounting onto SIRIUS 3RT2 Contactors

SIRIUS function modules for IO-Link

By grouping up to four starters it is possible to connect up to 16 starters to one master of the ET200S. All the signals of the individual controls are made available through only 3 individual wires per starter group directly in the process image. If the

potential at the master of the ET200S is the same as that of the controls, a further reduction in wiring is possible by providing the control supply voltage to the contactors by jumpering the corresponding communication wires.

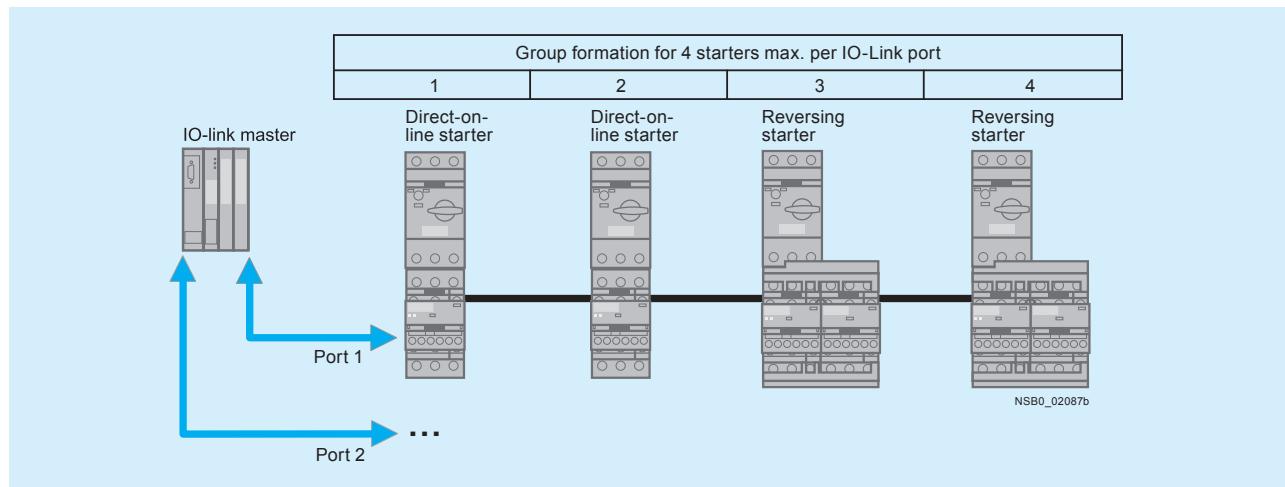

Group formation with IO-Link

In case of a malfunction, the corresponding error signals are also sent directly to the PLC in acyclic mode. This is in addition to transmission of the switching signals and status signals.

Possible error signals:

- Device defect
- No main voltage (motor starter protector tripped)
- No control supply voltage
- Limit position on the right / on the left
- Manual mode
- Process image fault

Application

The use of SIRIUS function modules with IO-Link is recommended above all in machines and plants in which there are several motor starters in one control cabinet. Using IO-Link, the connection of these starters to the automation level is easy, quick and error-free. And with IO modules no longer needed, the width of the ET200S becomes far smaller.

This easy integration of the starters in the TIA world does not limit the flexibility in the field in the least. For example, all function modules have special terminals in order to enable direct local disconnection. These terminals can be connected for example to a position switch. The input interrupts the voltage supply to the contactor coil directly, i. e. without going through the PLC. These terminals are jumpered in the as-delivered state.

Local manual operation of the complete starter group is also straight-forward using a operator panel. The latter is easily connected to the last starter and can be built into the front panel of the control cabinet if required. This offers significant advantages particularly for commissioning.

Benefits


- Reduction of the control current wiring to no more than one cable having three conductors for four starters
- Elimination of testing costs and wiring errors
- Reduction of configuration work
- Integration in TIA for clear diagnostics if a fault occurs
- Fewer IO modules saves space in the control cabinet
- All essential timing and interlocking functions for reversing duty and wye-delta starting are integrated
- No additional control circuit required

Further information on the application and benefits of the SIRIUS function modules for connection to the control system through IOLink can be found in Chapter 14 "Industrial Communication".



SIRIUS function modules for IO-Link

Selection and ordering data

Function modules for direct-on-line starting	Version	Screw terminals	Spring-type terminals	Weight
	Order No.	Order No.	kg	
	3RA2711-1AA00	3RA2711-1AA00	3RA2711-2AA00	
	3RA2711-2AA00			
Function modules for reversing starting ¹⁾				
	3RA2711-1BA00	3RA2711-1BA00	3RA2711-2BA00	
	3RA2711-2BA00			
Assembly kits for making 3-pole contactor assemblies				
	3RA2923-2AA1	3RA2913-2AA1	3RA2913-2AA2	
	3RA2923-2AA2	--	3RA2923-2AA2	
	3RA2933-2AA1	--	3RA2933-2AA2	
	3RA2933-2AA2	--		

1) For prewired contactor assemblies for reversing starting with voltage tap-off, see [pages 2/46 and 2/49](#). When these contactor assemblies are used, the assembly kit for the wiring is already integrated.

2) Version in sizes S0 and S2 with spring-type terminals:
Only the wiring modules for the main circuit are included.
No connectors are included for the auxiliary and control circuit.

Matching contactors with communications interface required;
see [pages 2/26](#).



Function Modules for Mounting onto SIRIUS 3RT2 Contactors

SIRIUS function modules for IO-Link

Version	Screw terminals	Spring-type terminals	Weight
	Order No.	Order No.	kg


Function modules for wye-delta starting¹⁾

3RA2711-1CA00

IO-Link connection, comprising one basic module and two coupling modules, plus an additional module connector for assembling an IO-Link group

3RA2711-1CA00

3RA2711-2CA00



3RA2923-2BB1

Assembly kits for making 3-pole contactor assemblies²⁾

The assembly kit contains:
mechanical interlock,
4 connecting clips for 3 contactors;
star jumper,
wiring modules on the top and bottom

- For size S00

3RA2913-2BB1

3RA2913-2BB2

- For size S0

- For main, auxiliary and control circuits
- Only for main circuit³⁾

3RA2923-2BB1

--

3RA2923-2BB2

- For size S2

- For main, auxiliary and control circuits
- Only for main circuit³⁾

3RA2933-2BB1

--

3RA2933-2BB2

--

3RA2933-2BB2

1) For complete contactor assemblies for wye-delta starting including function modules, [see pages 2/53 and 2/54](#).

2) When using the function modules for wye-delta starting, the wiring modules for the auxiliary current are not required.

3) Version in sizes S0 and S2 with spring-type terminals:

Only the wiring modules for the main circuit are included.

No connectors are included for the auxiliary and control circuit.

Matching contactors with communications interface required;
[see pages 2/32](#).

Version	Order No.	Weight
		kg

Accessories



3RA2711-0EE10

Module connector set, comprising:
• 2 module connectors, 14-pole, short
• 2 interface covers

3RA2711-0EE10



3RA2711-0EE06

Module connectors

- 14-pole, 9 cm
For size jump + 1 space
- 14-pole, 26 cm
For various space combinations
- 14-pole, 33.5 cm
For various space combinations
- 10-pole, 9 cm
For separate control signal infeed
within an IO-Link group

3RA2711-0EE06



3RA2711-0EE07

3RA2711-0EE07



3RA2711-0EE08

3RA2711-0EE08



3RA2711-0EE16

3RA2711-0EE16

Interface covers
(Set of 5)

3RA2711-0EE15



3RA2910-0

3RA2910-0

Operator panels¹⁾

3RA6935-0A

Operator panel (set), comprising:
• 1 x operator panel
• 1 x enabling module
• 1 x interface cover
• 1 x fixing terminal

3RA6935-0A



3RA2711-0EE11

3RA2711-0EE11

Connection cable,
length 2 m, 10- to 14-pole

For connecting the operator panel to the communication module

Enabling modules (replacement)

3RA6936-0A

Interface covers (replacement)

3RA6936-0B

¹⁾ Suitable only for communication through IO-Link.

For manuals, see
<http://support.automation.siemens.com/WW/view/en/39319600>.



SIRIUS function modules for AS-Interface

Overview


The SIRIUS function modules for AS-Interface enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components. They include the key control functions required for the particular starter, e. g. timing and interlocking. The electrical and mechanical connection to the contactor is established by snapping on and locking. An additional control circuit for the individual contactors can be eliminated with completely because a varistor is integrated in the modules. Feedback from the contactor contacts is performed with Hall sensors which provide reliable feedback concerning the switching state even under extremely dusty conditions. Connection of the starters to the higher-level control system takes place through AS-Interface with the Specification V2.1 in A/B technology. As the result, up to 62 starters can be con-

nected to one master and the address is entered in normal manner with an addressing unit.

Through the AS-Interface connection to the control system, a maximum of wiring is saved. The wiring outlay is reduced to the control supply voltage and the two individual wires for AS-Interface.

The following essential signals are transmitted:


- Availability of the starter in response to an indirect inquiry from the motor starter protector
- Starter operation
- Feedback concerning the switching state of the starter

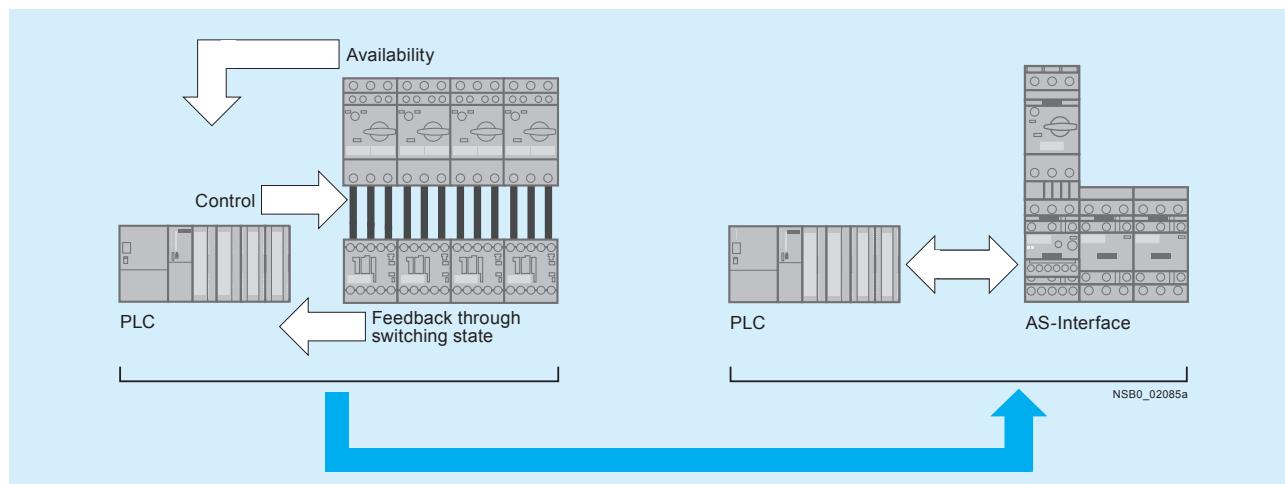


Signal transmission through AS-Interface

The inquiry from the motor starter protector does not take place through additional wiring between the auxiliary switch and the module but by means of a voltage inquiry at the contactor input.

This requires use of communication versions of the contactors with communication interface (see page 2/32).

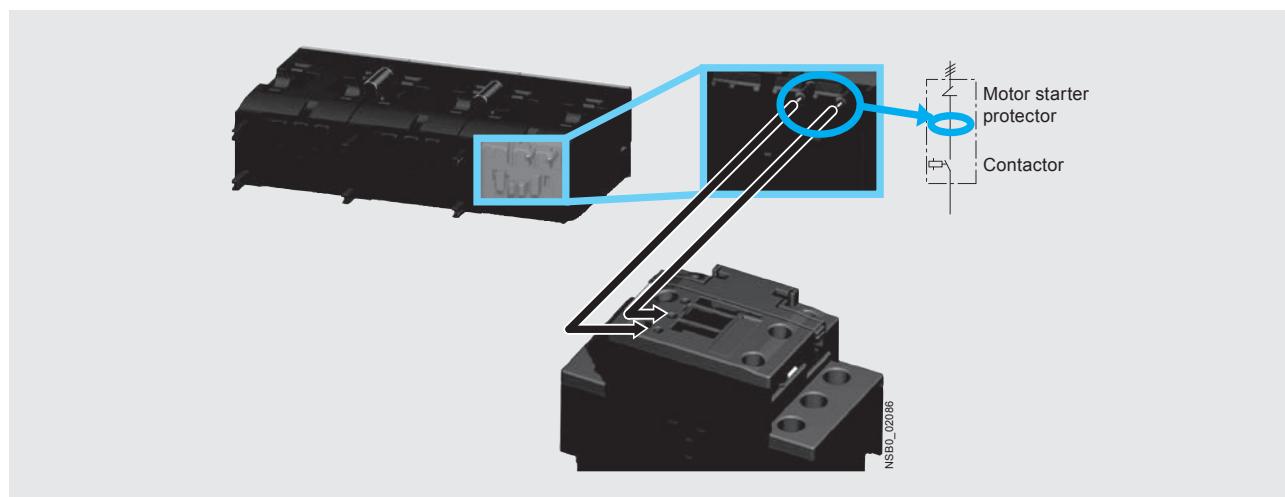

Availability signal through voltage pick-off

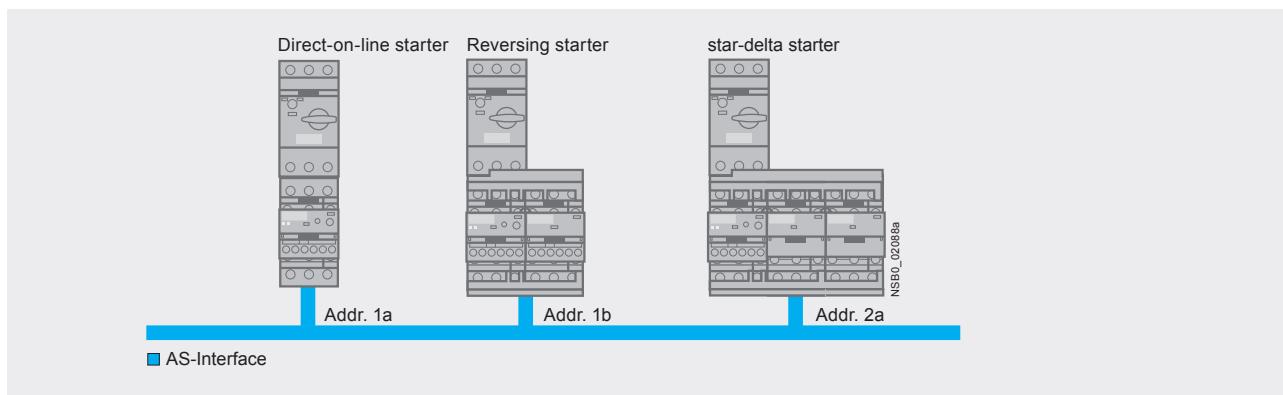

Topology with AS-Interface

This easy integration of the starters in the TIA world does not limit the flexibility in the field in the least. For example, all function modules have special terminals in order to enable direct local disconnection. These terminals can be connected for example,

to a position switch. The input interrupts the voltage supply to the contactor coil directly, i. e. without going through the PLC. These terminals are jumpered in the as-delivered state.

Application

The use of SIRIUS function modules with AS-Interface is recommended above all in machines and plants requiring easy connection of several different sensors and actuators both inside and outside the control cabinet to the higher-level control system. And with IO modules no longer needed, the width of the PLC is far smaller.

Benefits

- Reduction of control current wiring
- Elimination of testing costs and wiring errors
- Reduction of configuration work
- Elimination of IO modules saves space in the control cabinet
- All essential timing and interlocking functions for reversing duty and wye-delta starting are integrated
- No additional control circuit required



SIRIUS function modules for AS-Interface

Selection and ordering data

Function modules for direct-on-line starting	Version	Screw terminals	Spring-type terminals	Weight
	Order No.	Order No.	kg	
AS-Interface connection				
	3RA2712-1AA00	3RA2712-1AA00	3RA2712-2AA00	
	3RA2712-2AA00			
Function modules for reversing starting¹⁾				
AS-Interface connection, comprising one basic and one coupling module				
	3RA2712-1BA00	3RA2712-1BA00	3RA2712-2BA00	
	3RA2712-2BA00			
Assembly kits for making 3-pole contactor assemblies				
The assembly kit contains: mechanical interlock, 2 connecting clips for two contactors, wiring modules on the top and bottom				
• For size S00	3RA2913-2AA1	3RA2913-2AA2		
• For size S0	3RA2923-2AA1	--	3RA2923-2AA2	
- For main, auxiliary and control current - Only for main current	--			
• For size S2	3RA2933-2AA1	--	3RA2933-2AA2	
- For main, auxiliary and control current - Only for main current	--			

Matching contactors with communications interface required;
see page 2/32.

For matching AS-Interface masters, routers and power supply units, see Chapter 14 "Industrial Communication".

1) For prewired contactor assemblies for reversing starting with communication interface, see pages 2/46 and 2/49. When these contactor assemblies are used, the assembly kit for the wiring is already integrated.



Function Modules for Mounting onto SIRIUS 3RT2 Contactors

SIRIUS function modules for AS-Interface

Version	Screw terminals 	Spring-type terminals 	Weight kg
	Order No.	Order No.	
Function modules for wye-delta starting¹⁾			
	AS-Interface connection, comprising one basic module and two coupling modules	3RA2712-1CA00	3RA2712-2CA00
3RA2712-1CA00			
3RA2712-2CA00			
	Assembly kits for making 3-pole contactor assemblies The assembly kit contains: mechanical interlock, 4 connecting clips for 3 contactors; star jumper; wiring modules on the top and bottom	3RA2913-2BB1	3RA2913-2BB2
3RA2923-2BB1	<ul style="list-style-type: none"> • For size S00 • For size S0 <ul style="list-style-type: none"> - For main, auxiliary and control circuits - Only for main circuit • For size S2 <ul style="list-style-type: none"> - For main, auxiliary and control circuits - Only for main circuit 	3RA2913-2BB1	--
		3RA2913-2BB2	3RA2913-2BB2
3RA2923-2BB2		--	3RA2913-2BB2

1) For complete contactor assemblies for wye-delta starting including function modules, [see pages 2/53 and 2/54](#).

Matching contactors with communications interface required;
[see page 2/32](#).

For matching AS-Interface masters, routers and power supply units, [see Chapter 14 "Industrial Communication"](#).

Version		Order No.	Weight kg
Accessories			
	Module connector set , comprising: • 2 module connectors, 14-pole, short • 2 interface covers	3RA2711-0EE10	
3RA2711-0EE10			
	Module connectors • 14-pole, 9 cm For size jump + 1 space	3RA2711-0EE06	
3RA2711-0EE06			
	Interface covers (Set of 5)	3RA2711-0EE15	
3RA2711-0EE15			
	Sealable covers For 3RA27, 3RA28, 3RA29	3RA2910-0	
3RA2910-0			

For manuals, [see](#)
<http://support.automation.siemens.com/WW/view/en/39318922>.



SIRIUS function modules

Technical specifications

Type	3RA2811	3RA2831	3RA2812	3RA2832	3RA2816
Can be used for size	S00, S0	S2	S00, S0	S2	S00, S0, S2
Function	ON-delay		OFF-delay with control signal		Wye-delta function
General data					
Rated insulation voltage U_i	V AC	300			
Pollution degree 3					
Overvoltage category III					
Rated impulse withstand voltage U_{imp}	kV AC	4			
Operating range of excitation		0.85 ... 1.1 x U_s , 0.95 ... 1.05 times the rated frequency			
Overvoltage protection		Varistor integrated			
Rated power	W	1		1	
• Power consumption at 230 V AC, 50 Hz	VA	1		2	
DIAZED protection	Operational class gG	A	--		4
Switching frequency for load					
• With I_e at 230 V AC	h^{-1}	2 500		--	
• With 3RT2 contactor at 230 V AC	h^{-1}	2 500		--	
Recovery time	ms	50			150
Minimum ON period	ms	--	35		--
Residual current	Max.	mA	5	--	--
Voltage drop	Max.	VA	3.5	--	--
With conducting output					
Setting accuracy	Typ.		$\pm 15\%$		
With reference to upper limit of scale					
Repeat accuracy	Max.		$\pm 1\%$		
Electrical endurance					
• With 3RT2028 contactor	Operating cycles	100 000		--	
• At AC-15, 250 V, 3 A	Operating cycles	--		100 000	
Mechanical endurance	Operating cycles	100×10^6		10×10^6	
Permissible ambient temperature					
• During operation	°C	-25 ... +60			
• During storage	°C	-40 ... +80			
Degree of protection acc. to IEC 60947-1, Appendix C		IP20			
Shock resistance	g/ms	15/11			
Half-sine acc. to IEC 60068-2-27					
Vibration resistance					
According to IEC 60068-2-6	Hz/mm	10 ... 55/0.35			
Electromagnetic compatibility (EMC)		IEC 61000-6-2, IEC 61000-6-4, IEC 61812-1, IEC 60947-4-1			
Overvoltage protection		Varistor integrated			
Permissible mounting position		Any (see contactor)			
Conductor cross-sections					
Connection type (1 or 2 conductors can be connected)		Screw terminals			
• Solid	mm ²	1 x (0.5 ... 4), 2 x (0.5 ... 2.5)		--	
• Finely stranded with end sleeve	mm ²	1 x (0.5 ... 2.5), 2 x (0.5 ... 1.5)		--	
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)		--	
• Terminal screws		M3 (for standard screw driver size 2 or Pozidriv 2)		--	
• Tightening torque	Nm	0.8 ... 1.2		--	
Connection type (1 or 2 conductors can be connected)		Spring-type terminals			
• Operating devices	mm	3.0 x 0.5		--	
• Solid	mm ²	2 x (0.25 ... 1.5)		--	
• Finely stranded with end sleeve	mm ²	2 x (0.25 ... 1.5)		--	
• Finely stranded	mm ²	2 x (0.25 ... 1.5)		--	
• AWG cables, solid or stranded	AWG	2 x (24 ... 16)		--	



Contactors and Contactor Assemblies

Contactor Assemblies for Switching Motors

3RA reversing contactor assemblies

Design

Complete equipment assemblies

The fully wired reversing contactor assemblies are suitable for use in any climate. They are safe from touch to EN 50274.

The contactor assemblies each consist of two contactors with identical ratings. The contactors are mechanically and electrically interlocked (NC contact interlock). The main and control circuits are wired according to the circuit diagrams on page 2/206.

For motor protection, either 3RU2 or 3RB3 overload relays for direct mounting or individual mounting or thermistor motor protection tripping units must be ordered separately.

Components for customer assembly

Installation kits for all sizes are available for customer assembly of reversing contactor assemblies.

Contactors, overload relays, the mechanical interlock and — for momentary-contact operation — auxiliary switch blocks for latching must be ordered separately

The following points should be noted:

Size S00

- For maintained-contact operation: use contactors with an NC contact in the basic unit for the electrical interlock.
- For momentary-contact operation: use contactors with an NC contact in the basic unit for the electrical interlock; in addition, an auxiliary switch block with at least one NO contact for latching is required per contactor.

Size S0 and S2

Contactors come equipped with integrated 1 NO and 1 NC aux contacts in each contactor. Both electrical interlocking and latching are satisfied with the integrated auxiliaries. Mechanical interlocking is required in either size and comes in the assembly kits except for size S2 where you need to order 3RA2934-2B interlock separately.

Sizes S3

- For maintained-contact operation: the contactors have no auxiliary contact in the basic unit; NC contacts for the electrical interlock are therefore integrated in the mechanical interlock that can be mounted on the side of each contactor (one contact each for the left and right-hand contactors).
- For momentary-contact operation: the electrical interlock is the same as for maintained-contact operation; in addition, an auxiliary switch with one NO contact for latching is required per contactor. This contact can be snapped onto the top of the contactors. Alternatively, auxiliary switch blocks mounted on the side can be used; they must be fitted onto the outside of each contactor.

If the front-mounted mechanical interlock is used for size S2 to S3 contactors, two location holes for single-pole auxiliary switch blocks are provided on the front of each S2 contactor while three additional, single-pole auxiliary switch blocks can be snapped onto S3 contactors. The maximum auxiliary switch complements per contactor stated on page 2/15 must not be exceeded.

When size S3 contactors are combined with a front-mounted mechanical interlock, the 3RA19 33-2B and 3RA19 43-2B installation kits cannot be used.

Sizes S6 to S12

To insert the mechanical interlock, the prestamped location holes positioned opposite on the contactor must be knocked out. The internal auxiliary contacts (up to 1 NO + 1 NC per contactor) can be used for the electrical interlock and latching. The mechanical interlock itself does not contain any auxiliary contacts. Additional auxiliary contacts can be used on the outside and front (on the front in the case of 3RT10) of the reversing contactor assembly.

Principle of operation

The operating times of the individual 3RT10/20 contactors are rated in such a way that no overlapping of the contact making and the arcing time between two contactors can occur on reversing, providing they are interlocked via their auxiliary switches (NC contact interlock) and the operating mechanisms. An additional dead interval of 50 ms is necessary on reversing if the individual contactors are used at voltages > 500 V. The operating times of the individual contactors are not affected by the mechanical interlock.

Surge suppression

Sizes S00 to S3

All contactor assemblies can be fitted with RC elements or varistors for damping opening surges in the coil.

As with the individual contactors, the surge suppressors can either be plugged onto the front of the contactors (S00) or fitted onto the coil terminals on the top or bottom (S3). For sizes S0 and S2, the surge protection fits behind the hinged door on the front of the contactor and does not take up any additional space.

Sizes S6 to S12

The contactors are fitted with varistors as standard.



Contactors and Contactor Assemblies

Contactor Assemblies for Switching Motors

3RA13 and 3RA23 reversing contactor assemblies

Overview

The 3RA13 and 3RA23 reversing contactor assemblies can be ordered as follows:

Sizes S00 to S3

- Fully wired and tested, open type, with mechanical and electrical interlock.¹⁾

Sizes S00 to S12

- As components for customer assembly.

There is also a range of accessories (auxiliary switch blocks, surge suppressors, etc.) that must be ordered separately.

For overload relays for motor protection, see section 3.

The 3RA23 and 3RA13 contactor assemblies have screw connections and are available for screwing or snapping onto 35 mm standard mounting rails. The 3RA23 contactor assemblies are also available with spring-type terminals.

The and approvals only apply to the complete contactor assemblies and not to the components for customer assembly.

AC and DC operation

See pages 2/46 through 2/50 for complete part numbers.

Maximum horsepower rating at 460 V AC	AC-3 maximum inductive current	Size	Order No.	Contactor	Mechanical interlock ²⁾	Mechanical interlock ³⁾	Mechanical interlock ⁴⁾	Installation kit	Fully wired and tested contactor assembly
HP	A								
3	7	S00	3RT20 15	3RA29 13-2AA1 ⁶⁾	–	–	–	3RA29 13-2AA1 ⁶⁾	3RA23 15-8XB30-...
5	9		3RT20 16						3RA23 16-8XB30-...
7.5	12		3RT20 17						3RA23 17-8XB30-...
10	16		3RT20 18						3RA23 18-8XB30-...
7.5	12	S0	3RT20 24	3RA29 23-2AA1 ⁶⁾	–	–	–	3RA29 23-2AA1 ⁹⁾	3RA23 24-8XB30-...
10	16		3RT20 25						3RA23 25-8XB30-...
15	25		3RT20 26						3RA23 26-8XB30-...
20	32		3RT20 27						3RA23 27-8XB30-...
25	38		3RT20 28						3RA23 28-8XB30-...
30	40	S2	3RT20 35	3RA29 34-2B	–	–	–	3RA29 33-2AA1 ⁷⁾	3RA23 35-8XB30-1...
40	50		3RT20 36						3RA23 36-8XB30-1...
50	65		3RT20 37						3RA23 37-8XB30-1...
50	80		3RT20 38						3RA23 38-8XB30-1...
50	65	S3	3RT20 45	3RA29 34-2B	–	–	–	3RA29 43-2AA1 ⁸⁾	3RA23 45-8XB30-1...
60	80		3RT20 46						3RA23 46-8XB30-1...
75	95		3RT20 47						3RA23 47-8XB30-1...
100	115	S6	3RT10 54	–	–	3RA19 54-2A	3RA19 53-2A ⁹⁾	–	
125	150		3RT10 55						
150	185		3RT10 56						
150	225	S10	3RT10 64	–	–	3RA19 54-2A	3RA19 63-2A ⁹⁾	–	
200	265		3RT10 65						
250	300		3RT10 66						
300	400	S12	3RT10 75	–	–	3RA19 54-2A	3RA19 73-2A ⁹⁾	–	
400	500		3RT10 76						

For accessories, see page 2/86-2/89.
For circuit diagrams, see page 2/206.
For dimension drawings, see page 2/226-2/228.

- 1) An additional dead interval of 50 ms is necessary on reversing at voltages > 500 V.
- 2) Laterally mountable with one auxiliary contact (except no auxiliary contact in S2 & S3)
- 3) For front mounting with one auxiliary contact.
- 4) Laterally mountable without auxiliary contact.
- 5) Interlock must be ordered with installation kit.
- 6) Installation kit contains: mechanical interlock; 2 connecting clips for 2 contactors; wiring connectors on the top and bottom.
- 7) Installation kit contains: 2 connecting clips for 2 contactors; wiring connectors on the top and bottom and the mechanical interlock.
- 8) Installation kit contains: 2 connecting clips for 2 contactors; wiring connectors on the top and bottom.
- 9) Installation kit contains: wiring connector on the top and bottom.



Contactor Assemblies for Switching Motors


3RA23 reversing contactor assemblies

Fully wired and tested reversing contactor assemblies · Size S00 – Up to 10 HP

The figure shows the version with screw terminals

2

CONTACTORS AND ASSEMBLIES

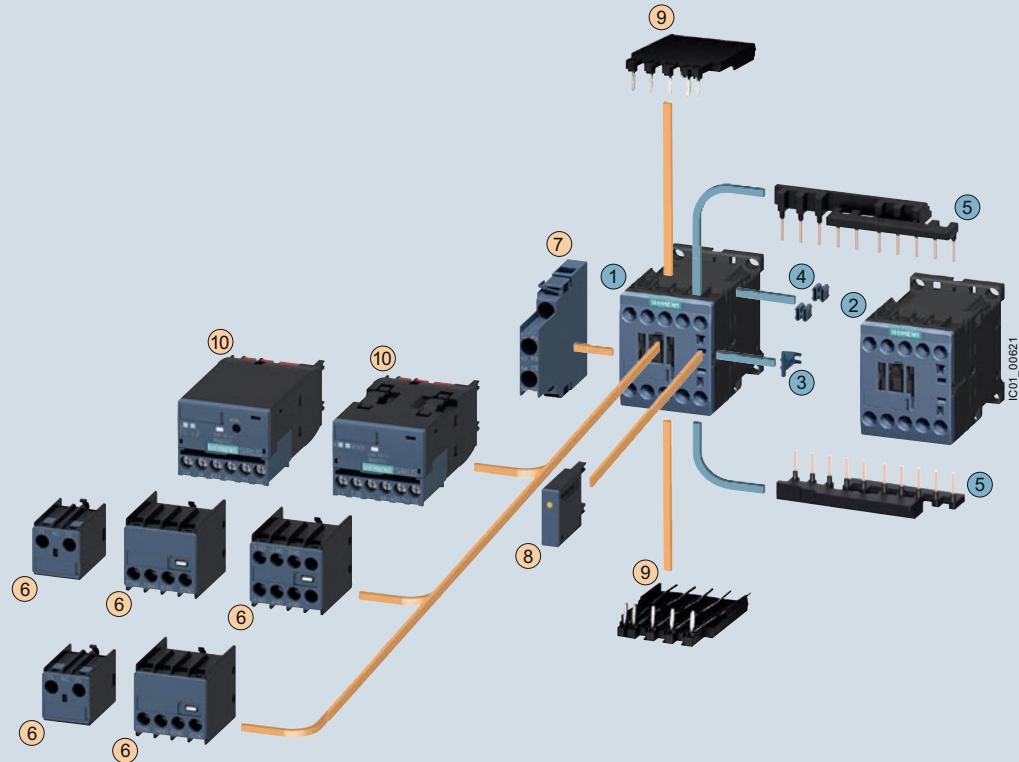

Mountable accessories (optional)

To be ordered separately	Type
⑥ Auxiliary switch block, front ¹⁾	3RH2911
⑦ Auxiliary switch block, lateral	3RH2921
⑧ Surge suppressors	3RT2916
⑨ Solder pin adapters	3RT1916-4KA1
⑩ Function module for connection to the control system	3RA271.-1BA00

Complete reversing contactor assembly

Individual parts	Type	
①② Contactors, 3 kW	Q11	Q12
①② Contactors, 4 kW	3RT2015	3RT2015
①② Contactors, 5.5 kW	3RT2016	3RT2016
①② Contactors, 7.5 kW	3RT2017	3RT2017
①② Assembly kit comprising:	3RT2018	3RT2018
③ Mechanical interlock ²⁾	3RA2913-2AA1	
④ Two connecting clips for two contactors ²⁾		
⑤ Wiring modules on the top and bottom for connecting the main current circuits, electrical interlock included ³⁾ , interruptible (NC contact interlock)		

¹⁾ Auxiliary switch block according to EN 50005 must be used.

²⁾ The parts ③ and ④ can only be ordered together as 3RA2912-2H mechanical connectors.

³⁾ 3RT201. contactors with one NC contact in the basic unit are required for the electrical interlock. An additional NO contact is required for momentary-contact operation.




Contactors and Contactor Assemblies

Contactor Assemblies for Switching Motors

3RA23 reversing contactor assemblies

Fully wired and tested contactor assemblies²⁾ · Size S00 · Up to 10 HP


2

CONTACTORS AND
ASSEMBLIES

3RA23 18-8XE30-1BB4



3RA23 1.-8XB30-1A..



3RA23 1.-8XB30-2A..

AC data	UL data		Three-phase HP ratings 200 V	460 V	575 V	Rated control supply voltage U_s at 50/60 Hz	Auxiliary contacts NO NC	Screw terminals		Spring-type terminals	Order No.	Weight approx. kg				
	Amp ratings AC2/AC3	Single-phase HP ratings 115 V	230 V					V	+	-						
AC operation, 50/60 Hz																
Size S00¹⁾																
7	1/4	3/4	1 1/2	2	3	5	24 AC	0	2	3RA23 15-8XB30-□AB0	0.46/0.50					
7	1/4	3/4	1 1/2	2	3	5	110/120 AC	0	2	3RA23 15-8XB30-□AK6	0.46/0.50					
7	1/4	3/4	1 1/2	2	3	5	220/240 AC	0	2	3RA23 15-8XB30-□AP6	0.46/0.50					
9	1/3	1	2	3	5	7 1/2	24 AC	0	2	3RA23 16-8XB30-□AB0	0.46/0.50					
9	1/3	1	2	3	5	7 1/2	110/120 AC	0	2	3RA23 16-8XB30-□AK6	0.46/0.50					
9	1/3	1	2	3	5	7 1/2	220/240 AC	0	2	3RA23 16-8XB30-□AP6	0.46/0.50					
12	1/2	2	3	3	7 1/2	10	24 AC	0	2	3RA23 17-8XB30-□AB0	0.46/0.50					
12	1/2	2	3	3	7 1/2	10	110/120 AC	0	2	3RA23 17-8XB30-□AK6	0.46/0.50					
12	1/2	2	3	3	7 1/2	10	220/240 AC	0	2	3RA23 17-8XB30-□AP6	0.46/0.50					
16	1	2	3	5	10	10	24 AC	0	2	3RA23 18-8XB30-□AB0	0.46/0.50					
16	1	2	3	5	10	10	110/120 AC	0	2	3RA23 18-8XB30-□AK6	0.46/0.50					
16	1	2	3	5	10	10	220/240 AC	0	2	3RA23 18-8XB30-□AP6	0.46/0.50					
DC operation																
7	1/4	3/4	1 1/2	2	3	5	24 DC	0	2	3RA23 15-8XB30-□BB4	0.58/0.62					
9	1/3	1	2	3	5	7 1/2	24 DC	0	2	3RA23 16-8XB30-□BB4	0.58/0.62					
12	1/2	2	3	3	7 1/2	10	24 DC	0	2	3RA23 17-8XB30-□BB4	0.58/0.62					
16	1	2	3	5	10	10	24 DC	0	2	3RA23 18-8XB30-□BB4	0.58/0.62					
With communication interface³⁾																
7	1/4	3/4	1 1/2	2	3	5	24 DC	0	2	3RA23 15-8XE30-□BB4	0.58/0.62					
9	1/3	1	2	3	5	7 1/2	24 DC	0	2	3RA23 16-8XE30-□BB4	0.58/0.62					
12	1/2	2	3	3	7 1/2	10	24 DC	0	2	3RA23 17-8XE30-□BB4	0.58/0.62					
16	1	2	3	5	10	10	24 DC	0	2	3RA23 18-8XE30-□BB4	0.58/0.62					

Screw terminals

1

Spring-loaded terminals

2

For other voltages see page 2/55

For accessories and spare parts, see page 2/72-2/89.

1) For coil operating range, see page 2/55.

2) The contactors integrated in the contactor assemblies have no unassigned auxiliary contacts.

3) For use with 3RA27 and 3RA28 communication modules.

See pages 2/30 to 2/37.




Contactor Assemblies for Switching Motors

3RA23 reversing contactor assemblies

Fully wired and tested reversing contactor assemblies · Size S0 – Up to 25 HP

The figure shows the version with screw terminals

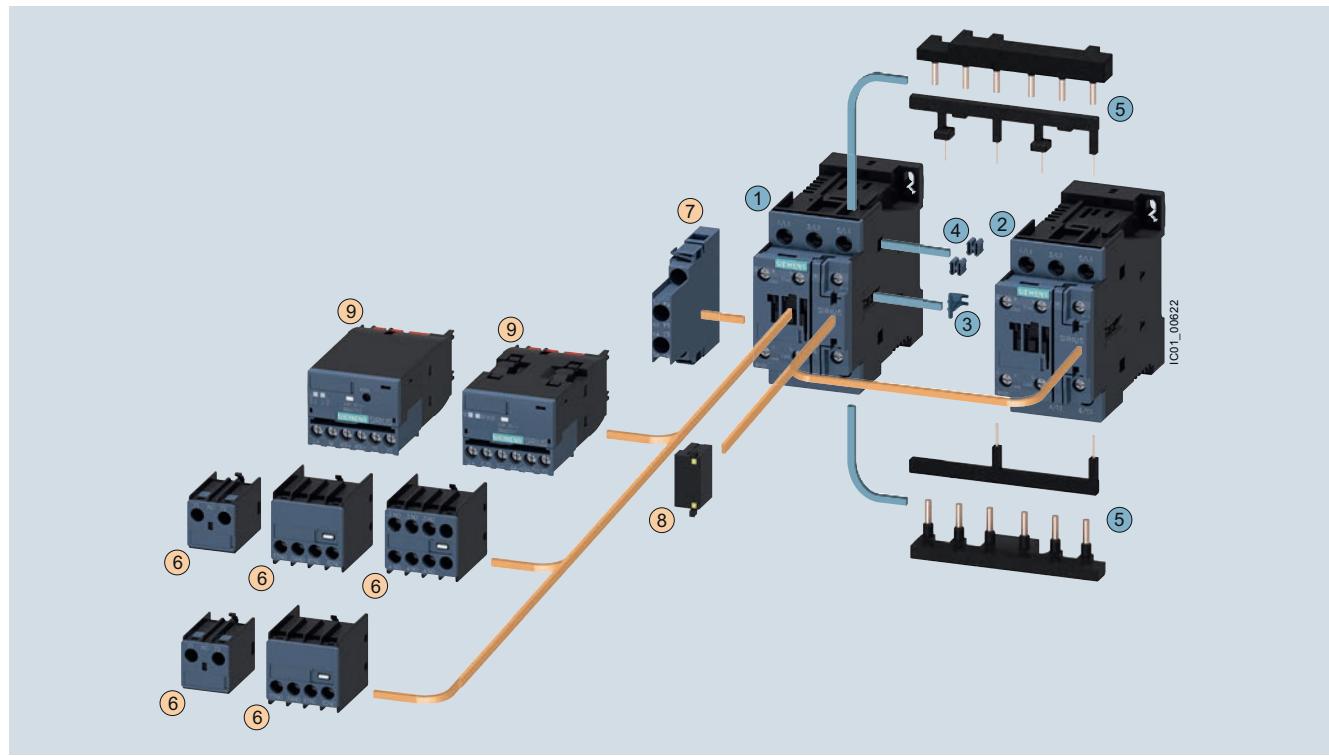

Mountable accessories (optional)

To be ordered separately

Type

- ⑥ Auxiliary switch block, front 3RH2911
- ⑦ Auxiliary switch block, lateral 3RH2921
- ⑧ Surge suppressors 3RT2926
- ⑨ Function module for connection to the control system 3RA271.-1BA00

Complete reversing contactor assembly

Individual parts

Type

Q12

	Type	Q11	Q12
① ②	Contactors, 5.5 kW	3RT2024	3RT2024
① ②	Contactors, 7.5 kW	3RT2025	3RT2025
① ②	Contactors, 11 kW	3RT2026	3RT2026
① ②	Contactors, 15 kW	3RT2027	3RT2027
① ②	Contactors, 18.5 kW	3RT2028	3RT2028
③ ... ⑤	Assembly kit comprising:	3RA2923-2AA1	

③ Mechanical interlock¹⁾

④ Two connecting clips for two contactors¹⁾

⑤ Wiring modules on the top and bottom for connecting the main current circuits, electrical interlock included (NC contact interlock)

¹⁾ The parts ③ and ④ can only be ordered together as 3RA2922-2H mechanical connectors.




Contactor Assemblies for Switching Motors


3RA23 reversing contactor assemblies

Fully wired and tested contactor assemblies · Size S0 · up to 25 HP


2

CONTACTORS AND
ASSEMBLIES

3RA23 24-8XE30-1BB4



3RA23 2.-8XB30-1A..



3RA23 2.-8XB30-2A..

AC data	UL data						Rated control supply voltage U_s at 50/60 Hz	Auxiliary contacts	Screw terminals	Weight approx.
	Amp ratings	Single-phase HP ratings	Three-phase HP ratings	460 V	575 V				Spring-type terminals	
AC2/AC3	115 V	230 V	200 V	230 V	460 V	575 V	V	NO NC	Order No.	kg
AC operation, 50/60 Hz										
Size S0¹⁾										
12	1	2	3	3	7 1/2	10	24 AC	2	3RA23 24-8XB30-□AC2	0.84/0.94
12	1	2	3	3	7 1/2	10	110/120 AC	2	3RA23 24-8XB30-□AK6	0.84/0.94
12	1	2	3	3	7 1/2	10	220/240 AC	2	3RA23 24-8XB30-□AP6	0.84/0.94
16	1	3	5	5	10	15	24 AC	2	3RA23 25-8XB30-□AC2	0.84/0.94
16	1	3	5	5	10	15	110/120 AC	2	3RA23 25-8XB30-□AK6	0.84/0.94
16	1	3	5	5	10	15	220/240 AC	2	3RA23 25-8XB30-□AP6	0.84/0.94
25	2	3	7 1/2	7 1/2	15	20	24 AC	2	3RA23 26-8XB30-□AC2	0.84/0.94
25	2	3	7 1/2	7 1/2	15	20	110/120 AC	2	3RA23 26-8XB30-□AK6	0.84/0.94
25	2	3	7 1/2	7 1/2	15	20	220/240 AC	2	3RA23 26-8XB30-□AP6	0.84/0.94
32	2	5	10	10	20	25	24 AC	2	3RA23 27-8XB30-□AC2	0.84/0.94
32	2	5	10	10	20	25	110/120 AC	2	3RA23 27-8XB30-□AK6	0.84/0.94
32	2	5	10	10	20	25	220/240 AC	2	3RA23 27-8XB30-□AP6	0.84/0.94
38	3	5	10	10	25	25	24 AC	2	3RA23 28-8XB30-□AC2	0.84/0.94
38	3	5	10	10	25	25	110/120 AC	2	3RA23 28-8XB30-□AK6	0.84/0.94
38	3	5	10	10	25	25	220/240 AC	2	3RA23 28-8XB30-□AP6	0.84/0.94
DC operation										
12	1	2	3	3	7 1/2	10	24 DC	2	3RA23 24-8XB30-□BB4	1.22/1.32
16	1	3	5	5	10	15	24 DC	2	3RA23 25-8XB30-□BB4	1.22/1.32
25	2	3	7 1/2	7 1/2	15	20	24 DC	2	3RA23 26-8XB30-□BB4	1.22/1.32
32	2	5	10	10	20	25	24 DC	2	3RA23 27-8XB30-□BB4	1.22/1.32
38	3	5	10	10	25	25	24 DC	2	3RA23 28-8XB30-□BB4	1.22/1.32
With communication interface²⁾										
12	1	2	3	3	7 1/2	10	24 DC	2	3RA23 24-8XE30-□BB4	1.22/1.32
16	1	3	5	5	10	15	24 DC	2	3RA23 25-8XE30-□BB4	1.22/1.32
25	2	3	7 1/2	7 1/2	15	20	24 DC	2	3RA23 26-8XE30-□BB4	1.22/1.32
32	2	5	10	10	20	25	24 DC	2	3RA23 27-8XE30-□BB4	1.22/1.32
38	3	5	10	10	25	25	24 DC	2	3RA23 28-8XE30-□BB4	1.22/1.32

Screw terminals

1

Spring-loaded terminals

2

For other voltages see page 2/55.

For accessories and spare parts, see page 2/72-2/89.

1) For coil operating range, see page 2/55.

2) For use with 3RA27 and 3RA28 communication modules.

See pages 2/30 to 2/37.



Contactor Assemblies for Switching Motors

3RA23 reversing contactor assemblies

Selection and ordering data

Size S2 · up to 50 HP




AC data Amp ratings AC2/AC3	UL data Single-phase HP ratings		Three-phase HP ratings				Rated control supply voltage ¹⁾	Auxiliary contacts NO NC	Screw Terminals Order No.	Weight approx. kg
	115 V A	230 V HP	200 V HP	230 V HP	460 V HP	575 V HP				
AC operation										
40	3	7.5	10	15	30	40	24 V, 50/60 Hz	2 2	3RA2335-8XB30-1AC2	1.72
							120 V, 60 Hz	2 2	3RA2335-8XB30-1AK6	
							240 V, 60 Hz	2 2	3RA2335-8XB30-1AP6	
50	3	10	15	15	40	50	24 V, 50/60 Hz	2 2	3RA2336-8XB30-1AC2	1.72
							120 V, 60 Hz	2 2	3RA2336-8XB30-1AK6	
							240 V, 60 Hz	2 2	3RA2336-8XB30-1AP6	
65	5	10	20	20	50	50	24 V, 50/60 Hz	2 2	3RA2337-8XB30-1AC2	2.548
							120 V, 60 Hz	2 2	3RA2337-8XB30-1AK6	
							240 V, 60 Hz	2 2	3RA2337-8XB30-1AP6	
80 ¹⁾	5	15	20	25	50	60	24 V, 50/60 Hz	2 2	3RA2338-8XB30-1AC2	2.548
							120 V, 60 Hz	2 2	3RA2338-8XB30-1AK6	
							240 V, 60 Hz	2 2	3RA2338-8XB30-1AP6	
AC/DC operation										
40	3	7.5	10	15	30	40	20-33 AC/DC	2 2	3RA2335-8XB30-1NB3	2.5
50	3	10	15	15	40	50	20-33 AC/DC	2 2	3RA2336-8XB30-1NB3	
65	5	10	20	20	50	50	20-33 AC/DC	2 2	3RA2337-8XB30-1NB3	
80 ¹⁾	5	15	20	25	50	60	20-33 AC/DC	2 2	3RA2338-8XB30-1NB3	

1) Max UL FLA = 65A at 460V

Fully wired and tested reversing contactor assemblies ·

Size S2 · Up to 50 HP

The figure shows the version with screw terminals

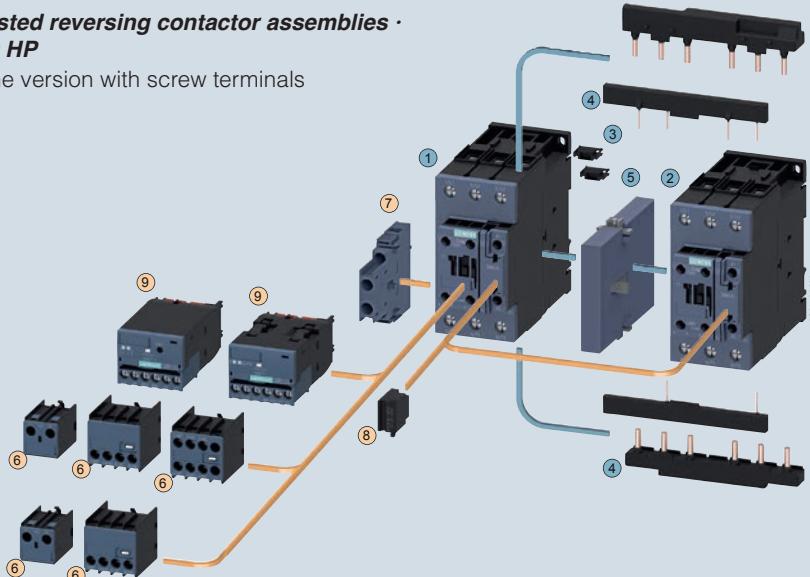

Mountable accessories (optional)

To be ordered separately

Type

- ⑥ Auxiliary switch block, front 3RH2911
- ⑦ Auxiliary switch block, lateral 3RH2921
- ⑧ Surge suppressors 3RT2936
- ⑨ Function module for connection to the control system 3RA271.-1BA00

For further voltages, see page 2/55.
For overview, see page 2/43-2/44.
For accessories, see page 2/72-2/89.
For circuit diagrams, see page 2/207.
For dimension drawings, see page 2/226.

Coil voltage tolerance:
at 50Hz: 0.8 to 1.1 x Us
at 60Hz: 0.85 to 1.1 x Us
at AC/DC: 0.8 to 1.1 x Us

Complete reversing contactor assembly

Individual parts

Type

Q12

①②	Contactors, 18.5 kW	Q11	3RT2035	3RT2035
①②	Contactors, 22 kW		3RT2036	3RT2036
①②	Contactors, 30 kW		3RT2037	3RT2037
①②	Contactors, 37 kW		3RT2038	3RT2038
③④	Assembly kit comprising:		3RA2933-2AA1	

③ Two connectors for two contactors

④ Wiring modules on the top and bottom for connecting the main and auxiliary current circuits, electrical interlock included (NC contact interlock)

⑤ Mechanical interlock (must be ordered separately) 3RA2934-2B



Contactor Assemblies for Switching Motors

3RA23 reversing contactor assemblies

2

CONTACTORS AND ASSEMBLIES



Selection and ordering data


Size S3 · up to 75 HP

AC data Amp ratings AC2/AC3	UL data Single-phase HP ratings		Three-phase HP ratings			Rated control supply voltage ¹⁾	Auxiliary contacts	Fully wired and tested contactor assembly	Weight approx. kg	
	115 V A	230 V HP	200 V HP	230 V HP	460 V HP					
AC operation										
80	5	15	20	25	50	60	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	0 2 0 2 0 2	3RA2345-8XB30-1AC2 3RA2345-8XB30-1AK6 3RA2345-8XB30-1AP6	3.9
95	7.5	15	25	30	60	75	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	0 2 0 2 0 2	3RA2346-8XB30-1AC2 3RA2346-8XB30-1AK6 3RA2346-8XB30-1AP6	3.9
110	10	20	30	30	75	100	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	0 2 0 2 0 2	3RA2347-8XB30-1AC2 3RA2347-8XB30-1AK6 3RA2347-8XB30-1AP6	3.9
AC/DC operation										5.7
80	5	15	20	25	50	60	20-33 V AC/DC	0 2	3RA2345-8XB30-1NB3	
95	7.5	15	25	30	60	75	20-33 V AC/DC	0 2	3RA2346-8XB30-1NB3	
110	10	20	30	30	75	100	20-33 V AC/DC	0 2	3RA2347-8XB30-1NB3	

Fully wired and tested reversing contactor assemblies ·

Size S3 · Up to 75 HP

The figure shows the version with screw terminals

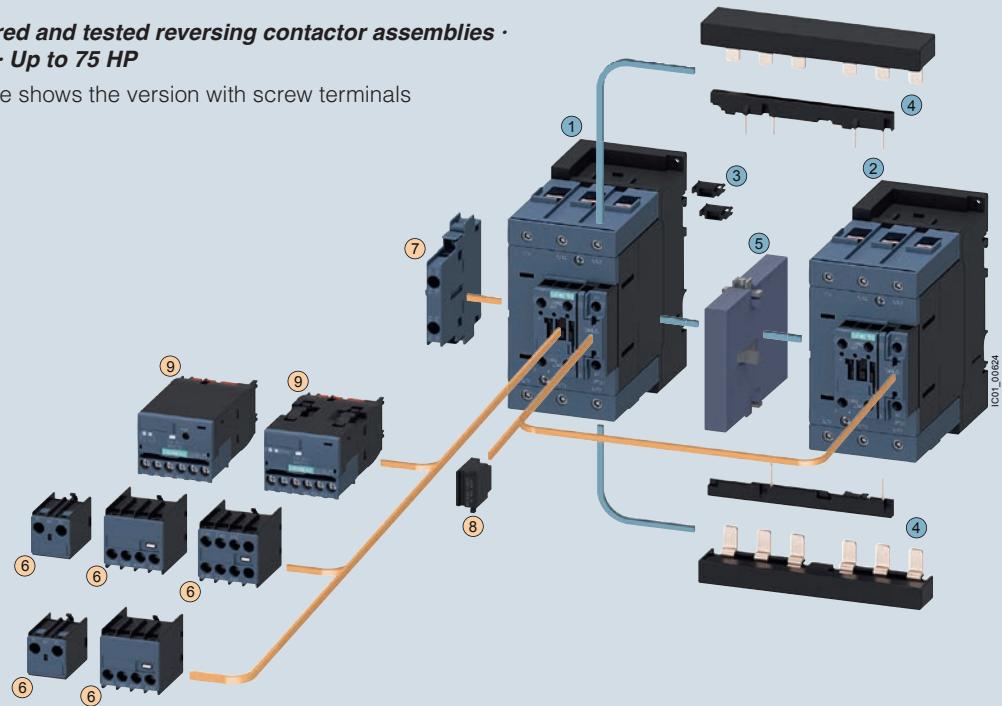

Mountable accessories (optional)

To be ordered separately Type

- ⑪ Auxiliary switch block, front 3RH2911
- ⑫ Auxiliary switch block, lateral 3RH2921
- ⑬ Surge suppressors 3RT2936
- ⑭ Function module for connection to the control system (the associated module connectors 3RA2711-0EE17 must be ordered separately)

For further voltages, see page 2/55.
For overview, see page 2/43-2/44.

For accessories, see page 2/72-2/89.
For circuit diagrams, see page 2/207.
For dimension drawings, see page 2/226.

1) Coil voltage tolerance
at 50 Hz: 0.8 ... 1.1 x U_s
at 60 Hz: 0.85 ... 1.1 x U_s

Complete reversing contactor assembly

Individual parts

Type

Q11 Q12

- ①② Contactors, 37 kW 3RT2045 3RT2045
- ①② Contactors, 45 kW 3RT2046 3RT2046
- ①② Contactors, 55 kW 3RT2047 3RT2047
- ③④ Assembly kit comprising:

③ Two connectors for two contactors

④ Wiring modules on the top and bottom for connecting the main and auxiliary current circuits, electrical interlock included (NC contact interlock)

Mechanical interlock
(must be ordered separately)

3RA2934-2B



Contactors and Contactor Assemblies

3RA24 Contactor Assemblies for Wye-Delta Starting

3RA24 complete units, 5.5 ... 22 kW

Overview

These 3RA24 contactor assemblies for wye-delta starting are designed for standard applications.

Note:

Contactor assemblies for wye-delta starting in special applications such as very heavy starting or wye-delta starting of special motors must be customized. Help with designing such special applications is available from Technical Assistance.

The 3RA24 contactor assemblies for wye-delta starting can be ordered as follows:

Sizes S00 and S0

- Fully wired and tested, with electrical and mechanical interlock.
- As individual parts for customer assembly.

A dead interval of 50 ms on reversing is already integrated in the function module for wye-delta starting.

There is also a range of accessories (lateral auxiliary switch blocks, etc.) that must be ordered separately.

For overload relays for motor protection see Chapter 3 "Overload Relays" --> "3RB3 Solid-State Overload Relays".

The 3RA24 contactor assemblies have screw or spring-type terminals and are suitable for screwing or snapping onto TH 35 standard mounting rails.

With the fully wired and tested 3RA24 contactor assemblies, the auxiliary contacts included in the basic devices are unassigned.

Screw terminals

Power kW	Rated data at AC 50 Hz 400 V		Size			Order No. complete
	Operational current I_e A	Motor current A		Line/delta contactor	Star contactor	
5.5	12	9.5 ... 13.8	S00-S00-S00	3RT2015-1....	3RT2015-1....	3RA2415-8XF32-1...
7.5	16	12.1 ... 17		3RT2017-1....	3RT2015-1....	3RA2416-8XF32-1...
11	25	19 ... 25		3RT2018-1....	3RT2016-1....	3RA2417-8XF32-1...
11	25	19 ... 25	S0-S0-S0	3RT2024-1...0	3RT2024-1...0	3RA2423-8XF32-1...
15	32	24.1 ... 34		3RT2026-1...0	3RT2024-1...0	3RA2425-8XF32-1...
18.5	40	34.5 ... 40		3RT2026-1...0	3RT2024-1...0	3RA2425-8XF32-1...
22	50	31 ... 43		3RT2027-1...0	3RT2026-1...0	3RA2426-8XF32-1...
22/30	50	31 ... 43	S2-S2-S0	3RT2035-1...0	3RT2026-1...0	3RA2434-8XF32-1...
37	80	62.1 ... 77.8		3RT2035-1...0	3RT2027-1...0	3RA2435-8XF32-1...
45	86	69 ... 86		3RT2036-1...0	3RT2028-1...0	3RA2436-8XF32-1...
55	115	77.6 ... 108.6	S2-S2-S2	3RT2037-1...0	3RT2035-1...0	3RA2444-8XF32-1...
75	150	120.7 ... 150		3RT2045-1...0	3RT2036-1...0	3RA2445-8XF32-1...
90	160	86 ... 160		3RT2046-1...0	3RT2037-1...0	3RA2446-8XF32-1...

Spring-type terminals

Power kW	Rated data at AC 50 Hz 400 V		Size			Order No. complete
	Operational current I_e A	Motor current A		Line/delta contactor	Star contactor	
5.5	12	9.5 ... 13.8	S00-S00-S00	3RT2015-2....	3RT2015-2....	3RA24 15-8XF31-2...
7.5	16	12.1 ... 17		3RT2017-2....	3RT2015-2....	3RA24 16-8XF31-2...
11	25	19 ... 25		3RT2018-2....	3RT2016-2....	3RA24 17-8XF31-2...
11	25	19 ... 25	S0-S0-S0	3RT2024-2...0	3RT2024-2...0	3RA24 23-8XF32-2...
15	32	24.1 ... 34		3RT2026-2...0	3RT2024-2...0	3RA24 25-8XF32-2...
18.5	40	34.5 ... 40		3RT2026-2...0	3RT2024-2...0	3RA24 25-8XF32-2...
25	50	31 ... 43		3RT2027-2...0	3RT2026-2...0	3RA24 26-8XF32-2...

Note:

The selection of contactor types refers to fused configurations.



Contactors and Contactor Assemblies

3RA24 Contactor Assemblies for Wye-Delta Starting

3RA24 complete units, 5.5 ... 22 kW

2

CONTACTORS AND ASSEMBLIES

Components for customer assembly

Assembly kits with wiring modules and mechanical connectors are available for contactor assemblies for wye-delta starting. Contactors, overload relays, function modules for wye-delta starting or wye-delta timing relays, auxiliary switches for electrical interlock – if required also feeder terminals and base plates – must be ordered separately.

The wiring kits for sizes S00 and S0 contain the top and bottom main conducting path connections between the line and delta

contactors (top) and between the delta and star contactors (bottom).

Control circuit

Features:

- Time setting range 0.5 to 60 s (3 selectable settings)
- Wide voltage range 24 to 240 V AC/DC
- Dead interval of 50 ms, non-adjustable.

Screw terminals

Power kW	Accessories for customer assembly Function modules for wye-delta starting	Assembly kit B, for single infeed	Star jumper	Overload relay, thermal (trip class CLASS 10)		Overload relay, solid-state (trip class CLASS 10)	
				Setting range	Order No.	Setting range	Order No.
5.5	3RA28 16-0EW20	3RA29 13-2BB1 ¹⁾	3RT29 16-4BA31	5.5 ... 8	3RU21 16-1HB0	4 ... 16	3RB30 16-1TB0
7.5				7 ... 10	3RU21 16-1JB0		
11				11 ... 16	3RU21 16-4AB0		
11	3RA28 16-0EW20	3RA29 23-2BB1 ²⁾	3RT29 26-4BA31	11 ... 16	3RU21 26-4AB0	6 ... 25	3RB30 26-1QB0
15				14 ... 20	3RU21 26-4BB0		
18.5				20 ... 25	3RU21 26-4DB0		
22				20 ... 25	3RU21 26-4DB0		

Spring-type terminals

Power kW	Accessories for customer assembly Function modules for wye-delta starting	Assembly kit B, for single infeed	Star jumper	Overload relay, thermal (trip class CLASS 10)		Overload relay, solid-state (trip class CLASS 10)	
				Setting range	Order No.	Setting range	Order No.
5.5	3RA28 16-0EW20	3RA29 13-2BB1 ¹⁾	3RT29 16-4BA32	5.5 ... 8	3RU21 16-1HC0	4 ... 16	3RB30 16-1TE0
7.5				7 ... 10	3RU21 16-1JC0		
11				11 ... 16	3RU21 16-4AC0		
11	3RA28 16-0EW20	3RA29 23-2BB2 ²⁾	3RT29 26-4BA32	11 ... 16	3RU21 26-4AC0	6 ... 25	3RB30 26-1QE0
15				14 ... 20	3RU21 26-4BC0		
18.5				20 ... 25	3RU21 26-4DC0		
22				20 ... 25	3RU21 26-4DC0		

¹⁾ The assembly kit contains: mechanical interlock, 4 connecting clips; wiring modules on the top (connection between line and delta contactor) and on the bottom (connection between delta and star contactor); star jumper and auxiliary circuit wiring.

²⁾ The assembly kit contains: mechanical interlock, 4 connecting clips; wiring modules on the top (connection between line and delta contactor) and on the bottom (connection between delta and star contactor); star jumper.


Order No. scheme

Digit of the Order No.	1. - 3.	4.	5.	6.	7.	8.	9.	10.	11.	12.	13.	14.	15.	16.				
SIRIUS contactor assemblies	3 R A																	
2nd generation		2																
Device type (e. g. 4 = contactor assembly for wye-delta starting)			4															
Contactor size (1 = S00, 2 = S0)				□														
Power dependent on size (e. g. 25 = 15 kW)					□													
Type of overload relay (8X = without)						□	□											
Assembly (F = ready-assembled, E, H = ready-assembled with communication)								□										
Interlock (3 = mechanical and electrical)									□									
Free auxiliary switches (e. g. S00: 1 = 3 NO total, S0: 2 = 3 NO + 3 NC total)										□								
Connection type (1 = screw, 2 = spring)										□								
Operating range / solenoid coil circuit (e. g. A = AC standard / without)											□							
Rated control supply voltage (e. g. K6 = 110/120 V, 50/60 Hz)											□	□						
Example	3	R	A	2	4	2	5	-	8	X	F	3	2	-	1	A	K	6



3RA24 Contactor Assemblies for Wye-Delta Starting


3RA24 complete units, 5.5 ... 22 kW

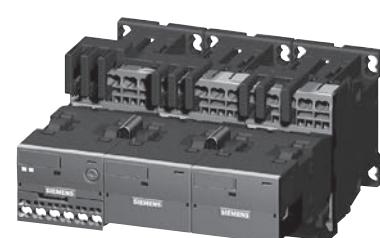

3RA24 1.-8XE31-2BB4



3RA24 1.-8XF31-1A .0

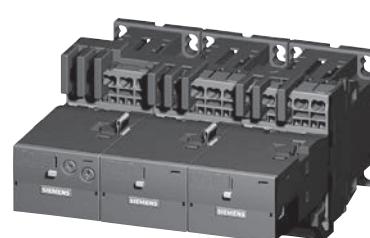

3RA24 1.-8XF31-2A.0

Rated data AC-3		Ratings of induction motors at 50 Hz and up to 400 V		Rated control supply voltage U_s at 50/60 Hz	
A	kW	230 V	400 V	500 V	690 V
					V

Screw terminals		Order No.	Weight approx.
			kg

Spring-type terminals		Order No.	Weight approx.
			kg

AC operation, 50/60 Hz					
12	3.3	5.5	7.2	9.2	24 AC 110/120 AC 220/240 AC
					3RA24 15-8XF31-1AB0 3RA24 15-8XF31-1AF0 3RA24 15-8XF31-1AP0
					0.910 0.850 0.850
16	4.7	7.5	10.3	9.2	24 AC 110/120 AC 220/240 AC
					3RA24 16-8XF31-1AB0 3RA24 16-8XF31-1AF0 3RA24 16-8XF31-1AP0
					0.910 0.850 0.850
25	5.5	11	11	11	24 AC 110/120 AC 220/240 AC
					3RA24 17-8XF31-1AB0 3RA24 17-8XF31-1AF0 3RA24 17-8XF31-1AP0
					0.850 0.850 0.850

	3RA24 15-8XF31-1AB0 3RA24 15-8XF31-1AF0 3RA24 15-8XF31-1AP0	0.910 0.850 0.850
	3RA24 16-8XF31-1AB0 3RA24 16-8XF31-1AF0 3RA24 16-8XF31-1AP0	0.910 0.850 0.850
	3RA24 17-8XF31-1AB0 3RA24 17-8XF31-1AF0 3RA24 17-8XF31-1AP0	0.910 0.850 0.850

	3RA24 15-8XF31-2AB0 3RA24 15-8XF31-2AF0 3RA24 15-8XF31-2AP0	0.910 0.910 0.910
	3RA24 16-8XF31-2AB0 3RA24 16-8XF31-2AF0 3RA24 16-8XF31-2AP0	0.910 0.910 0.910
	3RA24 17-8XF31-2AB0 3RA24 17-8XF31-2AF0 3RA24 17-8XF31-2AP0	0.910 0.910 0.910

DC operation					
12	3.3	5.5	7.2	9.2	24 DC
					3RA24 15-8XF31-1BB4
16	4.7	7.5	10.3	9.2	24 DC
					3RA24 16-8XF31-1BB4
25	5.5	11	11	11	24 DC
					3RA24 17-8XF31-1BB4

	3RA24 15-8XF31-1BB4	0.910
	3RA24 16-8XF31-1BB4	0.910
	3RA24 17-8XF31-1BB4	1.030

	3RA24 15-8XF31-2BB4	0.910
	3RA24 16-8XF31-2BB4	0.910
	3RA24 17-8XF31-2BB4	1.090

For IO-Link connection					
12	3.3	5.5	7.2	9.2	24 DC
					3RA24 15-8XE31-1BB4
16	4.7	7.5	10.3	9.2	24 DC
					3RA24 16-8XE31-1BB4
25	5.5	11	11	11	24 DC
					3RA24 17-8XE31-1BB4

	3RA24 15-8XE31-1BB4	1.030
	3RA24 16-8XE31-1BB4	1.030
	3RA24 17-8XE31-1BB4	1.030

	3RA24 15-8XE31-2BB4	1.090
	3RA24 16-8XE31-2BB4	1.090
	3RA24 17-8XE31-2BB4	1.090

The wye-delta starters listed here are assembled from individual contactors which are UL Listed. The overall assembly Catalog Number is not UL Listed.

¹⁾ Coil operating range
at 50 Hz: 0.8 ... 1.1 x U_s ; at 60 Hz: 0.85 ... 1.1 x U_s .

For other voltages see page 2/55.



3RA24 Contactor Assemblies for Wye-Delta Starting

3RA24 complete units, 5.5 ... 22 kW

Fully wired and tested contactor assemblies · Size S0-S0-S0 · Up to 22 kW


2

CONTACTORS AND
ASSEMBLIES

3RA24 2.-8XE32-1BB4



3RA24 2.-8XF32-1A .2

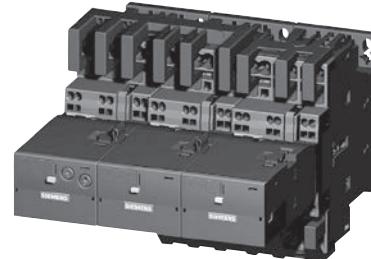

3RA24 2.-8XF32-2A .2

Rated data AC-3						Rated control supply voltage $U_{\text{S}}^{(1)}$ at 50/60 Hz	Screw terminals	Weight approx.	Spring-type terminals	Weight approx.
Operational current I_{O}	Ratings of induction motors at 50 Hz and up to 400 V	230 V	400 V	500 V	690 V	Order No.	Order No.	Order No.	Order No.	Order No.
A	kW	kW	kW	kW	V		kg		kg	kg
AC operation, 50/60 Hz										
25	7.1	11	15.6	19	24 AC 110/220 AC 220/240 AC	3RA24 23-8XF32-1AC2 3RA24 23-8XF32-1AK6 3RA24 23-8XF32-1AP6	1.370 1.370 1.370	3RA24 23-8XF32-2AC2 3RA24 23-8XF32-2AK6 3RA24 23-8XF32-2AP6	1.530 1.530 1.530	
32 / 40	11.4	15 / 18.5	19	19	24 AC 110/220 AC 220/240 AC	3RA24 25-8XF32-1AC2 3RA24 25-8XF32-1AK6 3RA24 25-8XF32-1AP6	1.370 1.370 1.370	3RA24 25-8XF32-2AC2 3RA24 25-8XF32-2AK6 3RA24 25-8XF32-2AP6	1.530 1.530 1.530	
50	--	22	19	19	24 AC 110/220 AC 220/240 AC	3RA24 26-8XF32-1AC2 3RA24 26-8XF32-1AK6 3RA24 26-8XF32-1AP6	1.390 1.390 1.390	3RA24 26-8XF32-2AC2 3RA24 26-8XF32-2AK6 3RA24 26-8XF32-2AP6	1.550 1.550 1.550	
DC operation										
25	7.1	11	15.6	19	24 DC	3RA24 23-8XF32-1BB4	1.940	3RA24 23-8XF32-2BB4	2.100	
32 / 40	11.4	15 / 18.5	19	19	24 DC	3RA24 25-8XF32-1BB4	1.940	3RA24 25-8XF32-2BB4	2.100	
50	--	22	19	19	24 DC	3RA24 26-8XF32-1BB4	1.960	3RA24 26-8XF32-2BB4	2.120	
For IO-Link connection										
25	7.1	11	15.6	19	24 DC	3RA24 23-8XE32-1BB4	1.940	3RA24 23-8XE32-2BB4	2.100	
32 / 40	11.4	15 / 18.5	19	19	24 DC	3RA24 25-8XE32-1BB4	1.940	3RA24 25-8XE32-2BB4	2.100	
50	--	22	19	19	24 DC	3RA24 26-8XE32-1BB4	1.960	3RA24 26-8XE32-2BB4	2.120	
For AS-Interface connection										
25	7.1	11	15.6	19	24 DC	3RA24 23-8XH32-1BB4	1.960	3RA24 23-8XH32-2BB4	2.120	
32 / 40	11.4	15 / 18.5	19	19	24 DC	3RA24 25-8XH32-1BB4	1.960	3RA24 25-8XH32-2BB4	2.120	
50	--	22	19	19	24 DC	3RA24 26-8XH32-1BB4	1.980	3RA24 26-8XH32-2BB4	2.140	

The wye-delta starters listed here are assembled from individual contactors which are UL Listed. The overall assembly Catalog Number is not UL Listed.

¹⁾ Coil operating range at 50 Hz:
0.8 ... 1.1 x U_{S} ; at 60 Hz: 0.85 ... 1.1 x U_{S} .

For other voltages see page 2/55 .



3RT / 3RA Contactors

Rated control supply voltages

Selection and ordering data

Contactor type	3RT201	3RT231	3RT202	3RT232	3RT2617	3RT203	3RT233	3RT104
Rated control supply voltage U_s	3RA211	3RT251	3RA212	3RT252	3RT2627	3RA213	3RT253	3RT134
					3RT2637			

S00 S00 S0 S0 S00-S2 S2 S2 S3

Rated control supply voltages (changes to 10th and 11th positions of the Order No.)								
AC Operation¹⁾								
Coils for 50 Hz	24 V AC	B0	B0	B0	B0	B0	B0	B0
(exception: size S00: 50 and 60 Hz ²⁾	42 V AC	D0	D0	D0	--	--	D0	--
	48 V AC	H0	H0	H0	--	--	H0	--
	110 V AC	F0	F0	F0	F0	F0	F0	F0
	230 V AC	P0	P0	P0	P0	P0	P0	P0
	400 V AC	V0	V0	V0	V0	V0	V0	V0
Coils for 50 and 60 Hz²⁾	24 V AC	B0	B0	C2	C2	C2	C2	C2
	42 V AC	D0	D0	D2	D2	D2	D2	D2
	48 V AC	H0	H0	H2	H2	H2	H2	H2
	110 V AC	F0	F0	G2	G2	G2	G2	G2
	208 V AC	M2	M2	M2	M2	M2	M2	M2
	220 V AC	N2	N2	N2	N2	N2	N2	N2
	230 V AC	P0	P0	L2	L2	L2	L2	L2
	240 V AC	P2	P2	P2	P2	P2	P2	P2
For USA and Canada³⁾	50 Hz:	60 Hz:						
	110 V AC	120 V AC	K6	K6	K6	K6	K6	K6
	220 V AC	240 V AC	P6	P6	P6	P6	P6	P6
		277 V AC	—	—	U6	—	U6	U6
		480 V AC	V6	—	V6	—	V6	V6
		600 V AC	—	—	T6	—	T6	T6
For Japan	50/60 Hz ⁴⁾ :	60 Hz ⁵⁾ :						
	100 V AC	110 V AC	G6	G6	G6	G6	G6	G6
	200 V AC	220 V AC	N6	N6	N6	N6	N6	N6
	400 V AC	440 V AC	R6	R6	R6	R6	R6	R6
DC Operation¹⁾								
	12 V DC	A4	A4	—	—	—	—	—
	24 V DC	B4	B4	B4	B4	—	—	—
	42 V DC	D4	D4	D4	D4	—	—	—
	48 V DC	W4	W4	W4	W4	—	—	—
	60 V DC	E4	E4	E4	E4	—	—	—
	72 V DC	J8	J8	J8	J8	—	—	—
	80 V DC	—	—	—	—	—	—	—
	110 V DC	F4	F4	F4	F4	—	—	—
	125 V DC	G4	G4	G4	G4	—	—	—
	220 V DC	M4	M4	M4	M4	—	—	—
	230 V DC	P4	P4	P4	—	—	—	—

Coil codes for frame sizes S6-S12 can be found on page 2/9. Further voltages on request

Rated control supply voltage	Contactor type	--	3RT2. 2.-N	Rated control supply voltage	Contactor type	3RT2. 3.-N	3RT2. 2.-N
$U_s \text{ min} \dots U_s \text{ max}$ ⁶⁾	Size	S00	S0	$U_s \text{ min} \dots U_s \text{ max}$ ⁶⁾	Size	S2	S3

Sizes S00 to S3

AC/DC operation (50/60 Hz AC, DC)

21 ... 28 V AC/DC	--	B3	20 ... 33 V AC/DC	B3	B3
95 ... 130 V AC/DC	--	F3	83 ... 155 V AC/DC	F3	F3
200 ... 280 V AC/DC ⁷⁾	--	P3	175 ... 280 V AC/DC	P3	P3

¹⁾ For deviating coil voltages and coil operating ranges of sizes S00 and S0, the SITOP power 24 V DC power supply unit with wide range input (93 to 264 V AC; 30 to 264 V DC) can be used for coil excitation (For more SITOP information see section 15).

²⁾ Coil operating range
at 50 Hz: 0.8 ... 1.1 x U_s
at 60 Hz: 0.85 ... 1.1 x U_s

³⁾ Coil operating range
Size S00: at 50 Hz: 0.85 ... 1.1 x U_s
at 60 Hz: 0.8 ... 1.1 x U_s
Size S0 to S3: at 50 Hz and 60 Hz: 0.8 ... 1.1 x U_s

⁴⁾ Coil operating range
Size S00: at 50/60 Hz: 0.85 ... 1.1 x U_s
Size S0: at 50 Hz: 0.8 ... 1.1 x U_s
at 60 Hz: 0.85 ... 1.1 x U_s

⁵⁾ Coil operating range
at 60 Hz: 0.8 ... 1.1 x U_s

⁶⁾ Coil operating range for S0: 0.7 x $U_s \text{ min} \dots 1.3 \times U_s \text{ max}$
Coil operating range for S2: 0.8 x $U_s \text{ min} \dots 1.1 \times U_s \text{ max}$

⁷⁾ The following applies to S0 and $U_s \text{ max} = 280$ V: Upper limit = 1.1 x $U_s \text{ max}$



Control Relays, Coupling Relays

3RH21 control relays, 4-pole

Selection and ordering data
AC and DC operation

3RH11...-1....



3RH11...-2....

Size S00 – Terminal designations according to EN 50011

Rated current at 240 V NEMA A600/Q600	Auxiliary contacts		Rated control supply voltage U_S V AC 50/60 Hz ³⁾	AC Operation Screw Terminals ^{1) 2)} Order No.	Rated control supply voltage U_S V DC	DC Operation Screw Terminals ^{1) 2)} Order No.
	Amps	Ident-ification No.				
For screw and snap-on mounting onto TH 35 standard mounting rail						
10	40E	4	—	24 110/120 220/240	3RH2140-1AB00 3RH2140-1AK60 3RH2140-1AP60	24 110 220
10	31E	3	1	24 110/120 220/240	3RH2131-1AB00 3RH2131-1AK60 3RH2131-1AP60	24 110 220
10	22E	2	2	24 110/120 220/240	3RH2122-1AB00 3RH2122-1AK60 3RH2122-1AP60	24 110 220

Notes:

For further voltages, see page 2/55.

For accessories, see pages 2/72-2/83.

For technical data, see pages 2/192-2/195.

For overview, see page 2/123.

For position terminals, see page 2/209-2/210.

For dimension drawings, see page 2/131.

1)The 3RH21 contactor relays are also available with spring-type terminals. Replace the 8th digit of the order number with a "2" e.g. "3RH2140-2AB00"

2)The 3RH21 contactor relays are also available with ring lug terminals. Replace the 8th digit of the order number with a "4" e.g. "3RH2140-4AB00"

3)AC coil operating range at 50 Hz: 0.8 to 1.1 x U_S at 60 Hz: 0.85 to 1.1 x U_S 4)For AC-15/AC-14 the following applies: $I_e = 6A$ for mounted auxiliary contacts.



Control Relays, Coupling Relays

3RH24 latched control relays, 4-pole

Overview

The contactor coil and the coil of the release solenoid are both designed for uninterrupted duty.

The number of auxiliary contacts can be extended by means of front auxiliary switch blocks (up to 4 poles).

RC elements, varistors diodes or diode assemblies can be fitted to both coils from the front for damping opening surges in the coil.

Selection and ordering data

Size S00 – Terminal designations according to EN 5001

	Rated current at 240 V AC-14, AC-15 NEMA A600/Q600	Ident. No.	Version No.	Rated control supply voltage U_s	AC Operation Screw Terminals ¹⁾	Rated control supply voltage U_s	DC Operation Screw Terminals			
For screw and snap-on mounting onto TH 35 standard mounting rail										
	10	40E	4	—	24, 50/60 Hz 110, 50 Hz / 120, 60 Hz 220, 50 Hz / 240, 60 Hz 230, 50/60 Hz	3RH2440-1AB00 3RH2440-1AK60 3RH2440-1AP60 3RH2440-1AP00	24 110 125 220	3RH2440-1BB40 3RH2440-1BF40 3RH2440-1BG40 3RH2440-1BM40		
	10	31E	3	1	24, 50/60 Hz 110, 50 Hz / 120, 60 Hz 220, 50 Hz / 240, 60 Hz 230, 50/60 Hz	3RH2431-1AB00 3RH2431-1AK60 3RH2431-1AP60 3RH2431-1AP00	24 110 125 220	3RH2431-1BB40 3RH2431-1BF40 3RH2431-1BG40 3RH2431-1BM40		
	10	22E	2	2	24, 50/60 Hz 110, 50 Hz / 120, 60 Hz 220, 50 Hz / 240, 60 Hz 230, 50/60 Hz	3RH2422-1AB00 3RH2422-1AK60 3RH2422-1AP60 3RH2422-1AP00	24 110 125 220	3RH2422-1BB40 3RH2422-1BF40 3RH2422-1BG40 3RH2422-1BM40		

For accessories for 3RH24, see below and page 2/72-2/83

For position of terminals, see page 2/209-2/210.

For technical data, see page 2/192-2/195.

For dimension drawings, see page 2/232.

For overview, see page 2/123.

Auxiliary switch blocks for 3RH21, 3RH24 control relays

Size S00 – For assembling to control relays to have 8 contacts

	For contactor type	For contactor		Contacts Version	Weight approx.	Screw Terminals Order No.	Spring Terminals Order No.
		HS Block Ident. No.	NO	NC	kg.		

Auxiliary switch blocks for snapping onto the front according to EN 50011

	3RH2140, 40 E	80E	4	—	0.050	3RH2911-1GA40	3RH2911-2GA40
	3RH2140, 40 E	71E	3	1	0.050	3RH2911-1GA31	3RH2911-2GA31
	3RH2140, 40 E	62E	2	2	0.050	3RH2911-1GA22	3RH2911-2GA22
	3RH2140, 40 E	53E	1	3	0.050	3RH2911-1GA13	3RH2911-2GA13
	3RH2140, 40 E	44E	—	4	0.050	3RH2911-1GA04	3RH2911-2GA04

1) Coil voltage tolerance
at 50 Hz: 0.8 to 1.1 x U_s
at 60 Hz: 0.85 to 1.1 x U_s

For further accessories see pages 2/72-2/83



Coupling Relays

3RH21 coupling relays for switching auxiliary circuits, 4 pole

Application

DC operation

IEC 60 947 and EN 60 947

The 3RH21 coupling relays for switching auxiliary circuits are tailored to the special requirements of working with electronic controls.

The 3RH21 coupling relays cannot be extended with auxiliary switch blocks.

Coupling relays have a low power consumption, an extended coil voltage tolerance and an integrated surge suppressor for damping opening surges on select versions

Selection and ordering data

DC operation

Size S00 – Terminal designations according to EN 50 011

Surge suppressor	Rated current	Auxiliary contacts		Screw Terminals ¹⁾ Order No.	Spring Terminals ¹⁾ Order No.	Weight approx. kg.
	at 240 V NEMA A600/Q600	Ident- ification No.	Version			
	Amps	NO	NC			

For screw and snap-on mounting onto TH 35 standard mounting rail

Rated control supply voltage $U_s = 24$ V DC, coil voltage tolerance **0.7 to 1.25 x U_s**

Power consumption of the coils **2.8 W** at 24 V (no auxiliary switch blocks can be mounted)



3RH2140-1HB40

Diode, varistor, or RC element can be mounted	10	40E	4	—	3RH2140-1HB40 3RH2131-1HB40 3RH2122-1HB40	3RH2140-2HB40 3RH2131-2HB40 3RH2122-2HB40	0.300
Diode integrated	10	40E	4	—	3RH2140-1JB40	3RH2140-2JB40	0.300
	10	31E	3	1	3RH2131-1JB40	3RH2131-2JB40	0.300
	10	22E	2	2	3RH2122-1JB40	3RH2122-2JB40	0.300
Suppressor diode integrated	10	40E	4	—	3RH2140-1KB40	3RH2140-2KB40	0.300
	10	31E	3	1	3RH2131-1KB40	3RH2131-2KB40	0.300
	10	22E	2	2	3RH2122-1KB40	3RH2122-2KB40	0.300

Rated control supply voltage $U_s = 24$ V DC, coil voltage tolerance **0.85 to 1.85 x U_s**

Power consumption of the coils **1.6 W** at 24 V (no auxiliary switch blocks can be mounted)



3RH2140-2SB40


Diode, varistor, or RC element can be mounted	10	40E	4	—	3RH2140-1MB40-0KT0 3RH2131-1MB40-0KT0 3RH2122-1MB40-0KT0	3RH2140-2MB40-0KT0 3RH2131-2MB40-0KT0 3RH2122-2MB40-0KT0	0.300
Diode integrated	10	40E	4	—	3RH2140-1VB40	3RH2140-2VB40	0.300
	10	31E	3	1	3RH2131-1VB40	3RH2131-2VB40	0.300
	10	22E	2	2	3RH2122-1VB40	3RH2122-2VB40	0.300
Suppressor diode integrated	10	40E	4	—	3RH2140-1SB40	3RH2140-2SB40	0.300
	10	31E	3	1	3RH2131-1SB40	3RH2131-2SB40	0.300
	10	22E	2	2	3RH2122-1SB40	3RH2122-2SB40	0.300

For technical data, see 2/196.

For position of terminals, see 2/209-2/210.

For dimension drawings, see 2/232.

1) Ring lug terminals are also available.
Replace the 8th digit of the order number with a "4", e.g. 3RH2140-4HB40

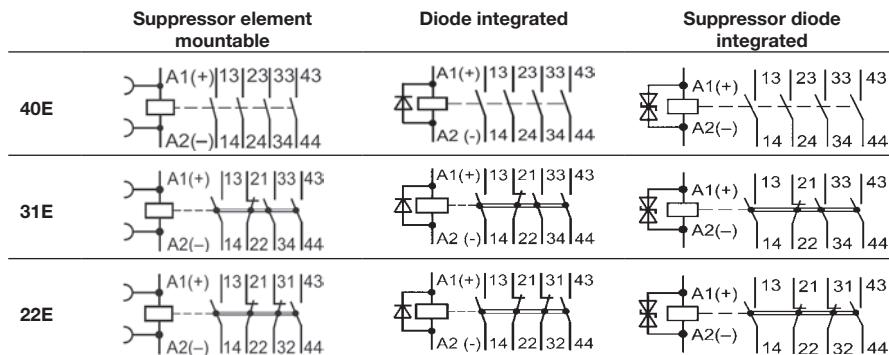



Contactors for Switching Motors

3TF68 and 3TF69 vacuum contactors, 3-pole

Selection and ordering data

AC operation ^{2) 3)}	3TF68	 Size 14 Auxiliary and control conductors: screw terminals Main conductor: bar connections • AC Operation	Maximum inductive current AC-3	Maximum power ratings				Max. resistive current AC-1	Auxiliary contacts	Rated control supply voltage ¹⁾	Order No.	Weight approx. kg		
			UL Ratings	IEC ratings										
			200 V	230 V	460 V	575 V	1000 V	A	HP	HP	kW	A	NO	NC
			630	200	250	500	600	600	700	4	4	110-132, 50/60 Hz	3TF6844-■CF7	15
			630	200	250	500	600	600	700	4	4	200-240, 50/60 Hz	3TF6844-■CM7	15
			820	290	350	700	860	800	910	4	4	110-132, 50/60 Hz	3TF6944-■CF7	19
			820	290	350	700	860	800	910	4	4	200-240, 50/60 Hz	3TF6944-■CM7	19
			UL ratings shown in above table: For IEC use only up to 1000 V:										■=0 ■=8	
			• DC Operation											
			630	200	250	500	600	600	700	3	3	24 V DC	3TF6833-■DB4	16.9
			820	290	350	700	860	800	910	3	3	24 V DC	3TF6933-■DB4	20.9
			UL ratings shown in above table: For IEC use only up to 1000 V:										■=1 ■=8	

Accessories and Spare parts for 3TF68 and 3TF69 vacuum contactors

Selection and ordering data

Coils	 3TY7	AC Operation The coils are fitted with varistors for damping surges as standard; the coil is supplied with the closing electronics included.	Details	For contactor type	Order No.	Weight approx. kg	
		DC Operation Reversing contactors are required for size 14 contactors: Contactor type Reversing contactor type 3TF68 and 3TF69: 3TC44 (70 mm wide, 85 mm high)		3TF68	3TY7683-0C●●	0.65	
				3TF69	3TY7693-0C●●		
		The coils are supplied without a reversing contactor.					
		●● For rated control supply voltages, see page 2/109.					
Vacuum interrupters							
		In order to ensure reliable operation of the contactors, only Siemens original replacement interrupters should be used. 3 vacuum interrupters with mounting parts per set.			3TF68	3TY7680-0B	3.2
					3TF69	3TY7690-0B	3.5
Auxiliary switch blocks with screw terminals							
		1 NO and 1 NC	First auxiliary switch block, left or right. Replacement type for: 3TY7561-1A, -1B	3TF68 / 3TF69	3TY7561-1AA00	0.042	
		1 NO and 1 NC	First auxiliary switch block, left or right late break	3TF68 / 3TF69	3TY7561-1EA00	0.042	
		1 NO and 1 NC	Second auxiliary switch block, left or right. Replacement type for: 3TY7561-1K, -1L	3TF68 / 3TF69	3TY7561-1KA00	0.042	
		Auxiliary switches for coil reconnection, for DC economy circuit with screw connections 1 NC Auxiliary switch block late break					
			3TF68 / 3TF69		3TY7681-1G	0.042	
		Solid-state compatible auxiliary switch block with screw terminals For mounting onto the side of contactors. For use in dusty atmospheres and electronic circuits with rated operational currents I_e AC-14 and DC-13 from 1 mA to 300 mA at 3 V to 60 V.					
				3TF68 / 3TF69	3TY7561-1UA00	0.042	

For accessories, see page 2/59-2/60.

For technical data, see page 2/179-2/184.

For description, see page 2/124.

For internal circuit diagrams, see page 2/218.

For position of terminals, see page 2/215.

For dimension drawings, see page 2/229.

1) For further voltages, see page 2/109.

2) Surge suppression integrated: fitted with varistor.

3) For EMC, see description on page 2/124.

3TF68/69 vacuum contactors are supplied with integrated surge suppression for the main conducting paths (for description, see page 2/124). In operation in circuits with DC choppers, frequency converters, variable-speed drives, for example, this protective circuitry is not required. It might be damaged by voltage peaks and harmonics generated, possibly followed by phase-to-phase shortcircuits. For this reason, the contactors can be supplied without overvoltage damping. To order these versions add a "-Z" and the order code "A02".



Contactors for Switching Motors

Accessories and Spare parts for 3TF68 and 3TF69 vacuum contactors

2

CONTACTORS AND
ASSEMBLIES

Selection and ordering data

Size	Type	Design	Order No.	Weight approx. kg	Std. Pack Qty
Interface for control by PLC					
3TX7 090-0D	14	3TF68 and 3TF69	Coil voltage tolerance: DC 17 V to 30 V Power consumption: 0.5 W at DC 24 V Fitted with varistor For technical data, see Part 7.	3TX7 090-0D	0.1 1
Terminal covers					
3TX7 686-0A	14	3TF68	for protection against inadvertent contact with the exposed busbar connections (DIN VDE 0106 Part 100)"	(Order No. and price per set) 3TX7 686-0A	0.17 1 set = 2 units
		3TF69		3TX7 696-0A	
Link for paralleling (star jumper) · 3-pole, without terminal 1)					
3TX7 680-0D	14	3TF68		3TX7 680-0D	0.26 1
	14	3TF68	• Cover plate for paralleling link A cover plate must be used in order to protect against inadvertent contact (DIN VDE 0106 Part 100).	3TX7 680-0E	0.18 1
Box terminals for laminated copper bars					
3TX7570-1E	14	3TF68	• Without auxiliary conductor terminal With single covers for protection against inadvertent contact (EN 50274)	3TX7 570-1E	0.6 1
	14	3TF69	• With auxiliary conductor terminal Conductor cross-sections for auxiliary conductors: Solid: 2 x (0.75 ... 2.5) mm ² Finely stranded with end sleeve: 2 x (0.5 ... 2.5) mm ² Solid or stranded: 2 x (18 ... 12) AWG Tightening torque: 0.8 Nm ... 1.4 Nm (7 ... 12 lb.in.)	3TX7 690-1F	2.0 1
Surge suppressors — Varistors					
3TX7 572-3G	14	3TF68 and 3TF69	For DC economy circuit; for lateral snapping onto auxiliary switches	Rated control supply voltage, V DC	
				24 ... 48	3TX7 572-3G 0.09 1
				48 ... 127	3TX7 572-3H 0.09 1
			The varistor is included in the scope of supply of the 3TF68 and 3TF69 contactors with AC operation.	127 ... 240	3TX7 572-3J 0.09 1
			Includes the peak value of the alternating voltage on the DC side.		

1) The link for paralleling can be reduced by one pole.



Contactors and Replacement Parts

General Purpose - Type 3TC

Ordering information

- Select Contactor from table below.
- Complete catalog number replace the two daggers (††) with appropriate coil voltage suffix. See corresponding coil voltage suffix table below.
- Technical Data [see page 2/185-2/188](#).
- Dimensions [see page 2/229](#).



3TC44

3TC52

Frame Size	Ampere Rating	2 Pole DC HP Ratings (DC-3, DC-5)					Auxiliary contacts		AC-Operated Order No.	DC-Operated Order No.	
		Open	Enclosed	115 V	230 V	500 V	575 V	NO	NC		
3TC DC Contactors											
2	40	40	5	10	15	15	2	2	3TC4417-0B††	3TC4417-0A††	
4	75	68	8	18	40	45	2	2	3TC4817-0B††	3TC4817-0A††	
8	220	200	25	50	100	100	2	2	3TC5217-0B††	3TC5217-0A††	
12	330	300	40	75	150	150	2	2	3TC5617-0B††	3TC5617-0A††	

Device	Frame Size	Catalog Number						
Coils, AC		24V AC	120V AC	220/240V AC	277V AC	480V AC	600V AC	
3TC	3TY6483-0AK6	3TC4417-0B††	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0
		3TC4817-0B††	3TY6483-0AC1	3TY6483-0AK6	3TY6483-0AP6	3TY6483-0AP0	3TY6483-0AV0	3TY6483-0AS0
		3TC5217-0B††		3TY6523-0AK6	3TY6523-0AP6	3TY6523-0AP0	3TY6523-0AV0	
		3TC5617-0B††		3TY6566-0AK6		3TY6566-0AP0	3TY6566-0AV0	3TY6566-0AS0
Coils, DC		24V DC	48V DC	110V DC	125V DC	230V DC		
3TC	3TY6483-0BB4	3TC4417-0A††	3TY6443-0BB4		3TY6443-0BF4	3TY6443-0BG4		
		3TC4817-0A††	3TY6483-0BB4	3TY6483-0BW4	3TY6483-0BF4	3TY6483-0BG4		
		3TC5217-0A††	3TY6523-0BB4		3TY6523-0BF4	3TY6523-0BG4	3TY6523-0BP4	
		3TC5217-0A††	3TY6563-0BB4		3TY6563-0BF4	3TY6563-0BG4	3TY6563-0BP4	

Frame size	Contactor type	Mounting position	Solid state	Order No.
Auxiliary Contact Blocks with 1 NO + 1 NC contacts²⁾				
2, 4	3TC44 or 3TC48	1st block, left or right	—	3TY6501-1AA00
		2nd block, left or right	Yes ³⁾	3TY7561-1UA00
4	3TC48	2nd block, left ⁵⁾	—	3TY6501-1K
		2nd block, right ⁵⁾	—	3TY6501-1L
8, 12	3TC52 or 3TC56	1st block, left	—	3TY6561-1A
		1st block, right	—	3TY6561-1B
		2nd block, left ⁵⁾	—	3TY6561-1K
		2nd block, right ⁵⁾	—	3TY6561-1L

Coil Suffix Table ††

Replace †† in the contactor Order No. with a coil code from the table below.

V AC 50/60 Hz	Code	V DC	Code
24	C1	24	B4
120	K1*	36	V4
240	P1	48	W4
460	V0	60	E4
600	S0	72	J8
		110	F4
		125	G4
		220	M4
		230	P4

*Use suffix K2 for 3TC44.

Device Type	Frame Size	Catalog Number	
Main Contacts¹⁾			
	3TC44	3TY2440-0A	
	3TC48	3TY2480-0A	
3TY2480-0A	3TC	3TC52	3TY2520-0A
		3TC56	3TY2560-0A

Arc Chutes	Frame Size	Catalog Number	
3TY2482-0A			
	3TC	3TC44	3TY2442-0A
		3TC48	3TY2482-0A
		3TC52	3TY2522-0A
		3TC56	3TY2562-0A

1) Main contact kits for size 3TC48 and larger include springs. Smaller sizes do not.

2) On DC operated contactors the maximum number of auxiliary contacts is 2 NO, 2 NC.

3) For use in dusty atmosphere and electronic circuits with rated operational currents I_{e} AC-14 and DC-13 from 1 mA to 300 mA at 3V to 60V. With 1 changeover contact.

4) Discount Code: DC Contactors

5) Can only be mounted on AC-operated contactors.




Contactors and Contactor Assemblies

DC Contactor Replacement Parts

General Purpose - Type 3TC

2

CONTACTORS AND ASSEMBLIES

For contactors		Version	Rated control supply voltage U_s		Order No.	Std. Pack Qty
Size	Type		V AC	V DC		
Surge suppressors · Varistors						
	2	3TC44 ¹⁾	Varistors²⁾ with line spacer, for mounting onto the coil terminal	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250	3TX7 402-3G 3TX7 402-3H 3TX7 402-3J 3TX7 402-3K 3TX7 402-3L
	4	3TC48	Varistors²⁾ for sticking onto the contactor base or for mounting separately	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250	3TX7 462-3G 3TX7 462-3H 3TX7 462-3J 3TX7 462-3K 3TX7 462-3L
	8 and 12	3TC52, 3TC56	Varistor for sticking onto the contactor base or for mounting separately	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250	3TX7 462-3G 3TX7 462-3H 3TX7 462-3J 3TX7 462-3K 3TX7 462-3L
	8 and 12	3TC52, 3TC56	Varistors²⁾ for separate screw connection or snapping onto TH 35 standard mounting rail		24 ... 70 70 ... 150 150 ... 250	3TX7 522-3G 3TX7 522-3H 3TX7 522-3J
Surge suppressors · RC elements						
	4	3TC48	RC elements For lateral snapping onto auxiliary switch or TH 35 standard mounting rail	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250	3TX7 462-3R 3TX7 522-3R 3TX7 462-3S 3TX7 522-3S 3TX7 462-3T 3TX7 522-3T 3TX7 462-3U 3TX7 462-3V
	8 and 12	3TC52, 3TC56	RC elements For lateral snapping onto auxiliary switch or TH 35 standard mounting rail	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250	3TX7 522-3R 3TX7 522-3S 3TX7 522-3T 3TX7 522-3U 3TX7 522-3V
Surge suppressors · Diodes						
	4 to 12	3TC48, 3TC52, 3TC56	Diode assemblies³⁾ (diode and Zener diode) for DC solenoid system, for sticking onto the contactor base or for mounting separately		24 ... 250	3TX7 462-3D
	6	3TC48	For protection against inadvertent contact with exposed busbar connections. Can be screwed on free screw end. Covers one busbar connection			3TX6 506-3B 1 set= 6 units
	10 and 14	3TC52, 3TC56				3TX6 546-3B 1 set= 6 units


¹⁾ The connection piece for mounting the surge suppressor must be bent slightly.

²⁾ Includes the peak value of the alternating voltage on the DC side.

³⁾ Not for DC economy circuit.



Contactor relays and coupling relays – Size S00 with accessories

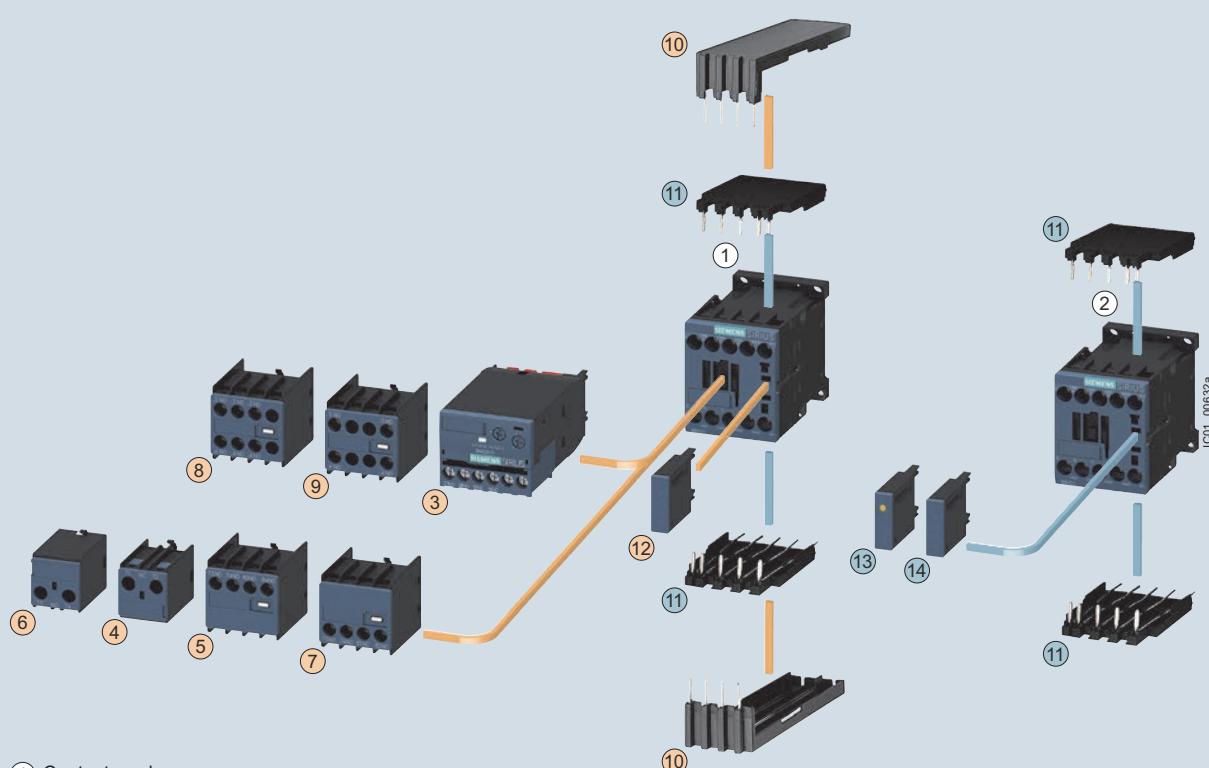

① Contactor relay

② Coupling contactor relay for auxiliary circuits

③ 3RA28 function module

④ 1-pole auxiliary switch block, cable entry from the top

⑤ 2-pole auxiliary switch block, cable entry from the top

⑥ 1-pole auxiliary switch block, cable entry from the bottom

⑦ 2-pole auxiliary switch block, cable entry from the bottom

⑧ 4-pole auxiliary switch block
(terminal designations according to EN 50011 or EN 50005)⑨ 2-pole auxiliary switch block, solid-state compatible version
(terminal designations according to EN 50005)

⑩ Solder pin adapter for contactor relays with 4-pole auxiliary switch block

⑪ Solder pin adapter

⑫ Additional load module for increasing the permissible residual current

⑬ Surge suppressor with LED

⑭ Surge suppressor without LED

For contactor relays

For increasing the permissible residual current

3RT2 contactors and coupling relays – Size S00 with mountable accessories


Overview

The SIRIUS family of controls

The SIRIUS modular system with its components for the switching, starting, protection and monitoring of motors and industrial systems stands for the fast, flexible and space-saving construction of control cabinets.

3RT2 contactors


Size S00 with mountable accessories

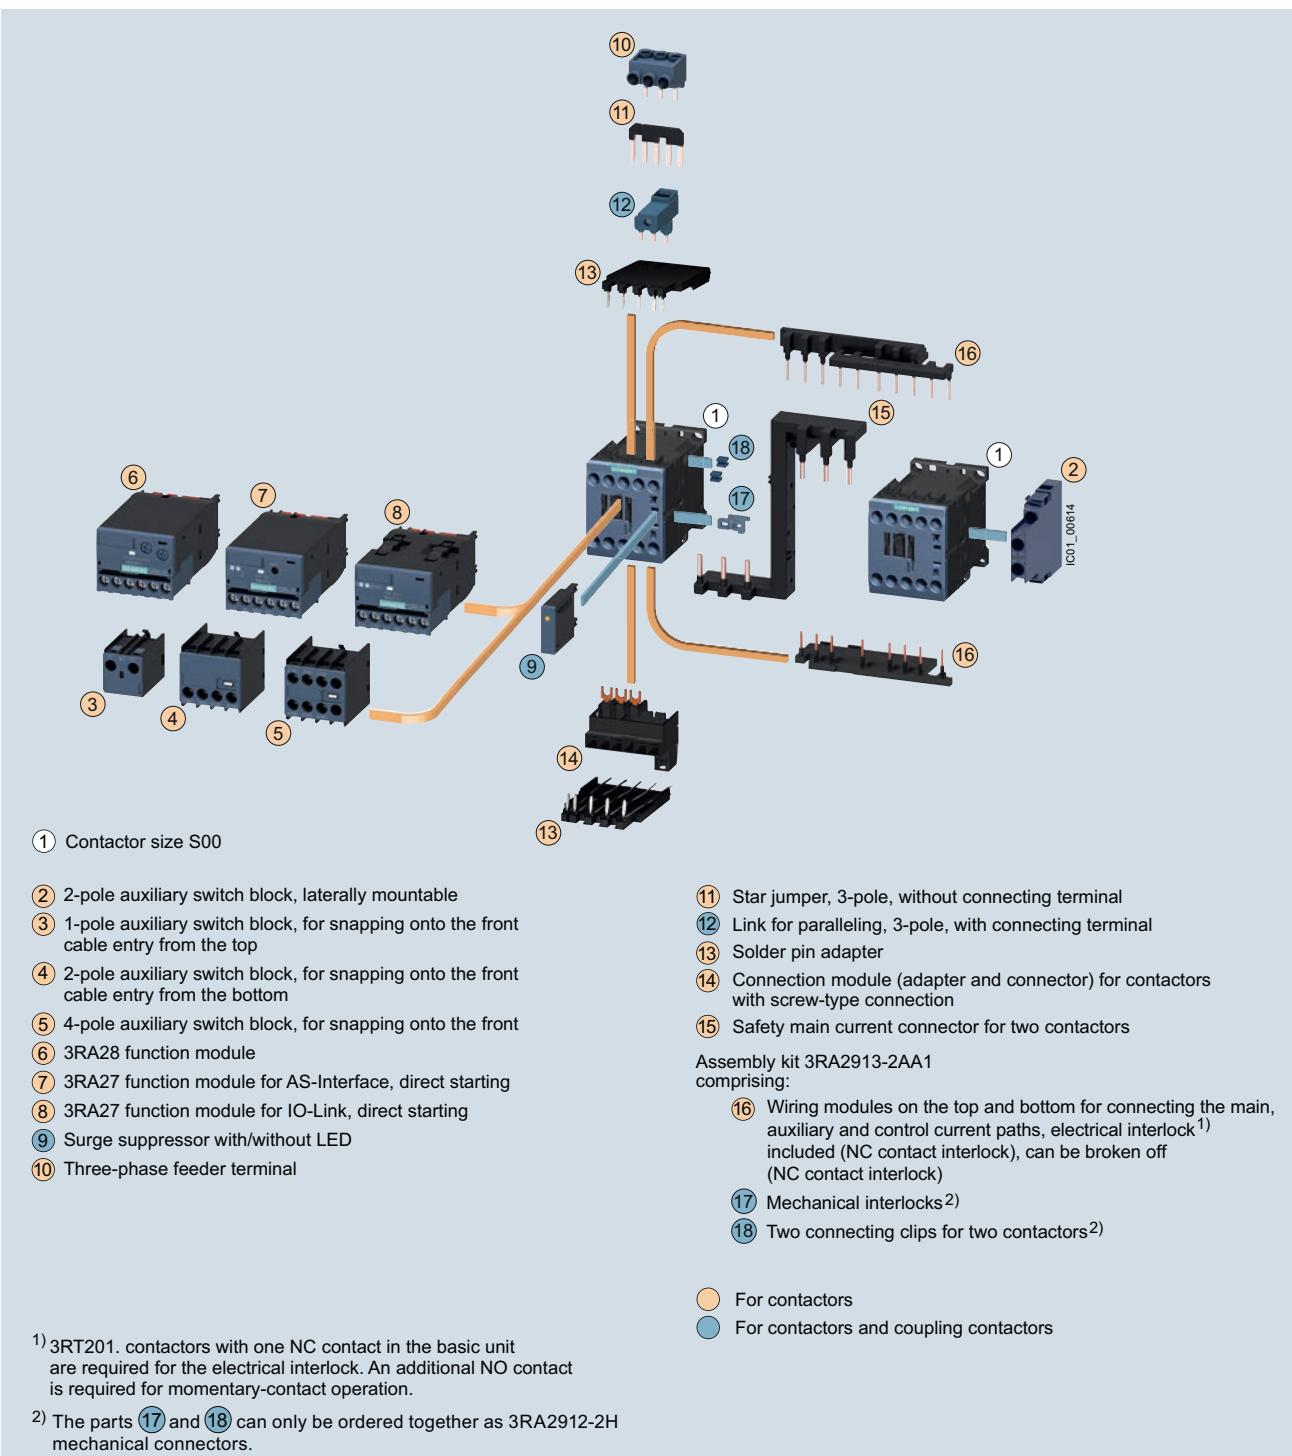

3RT2 contactors and coupling relays – Size S0 with mountable accessories

3RT2 contactors

Size S0 with mountable accessories

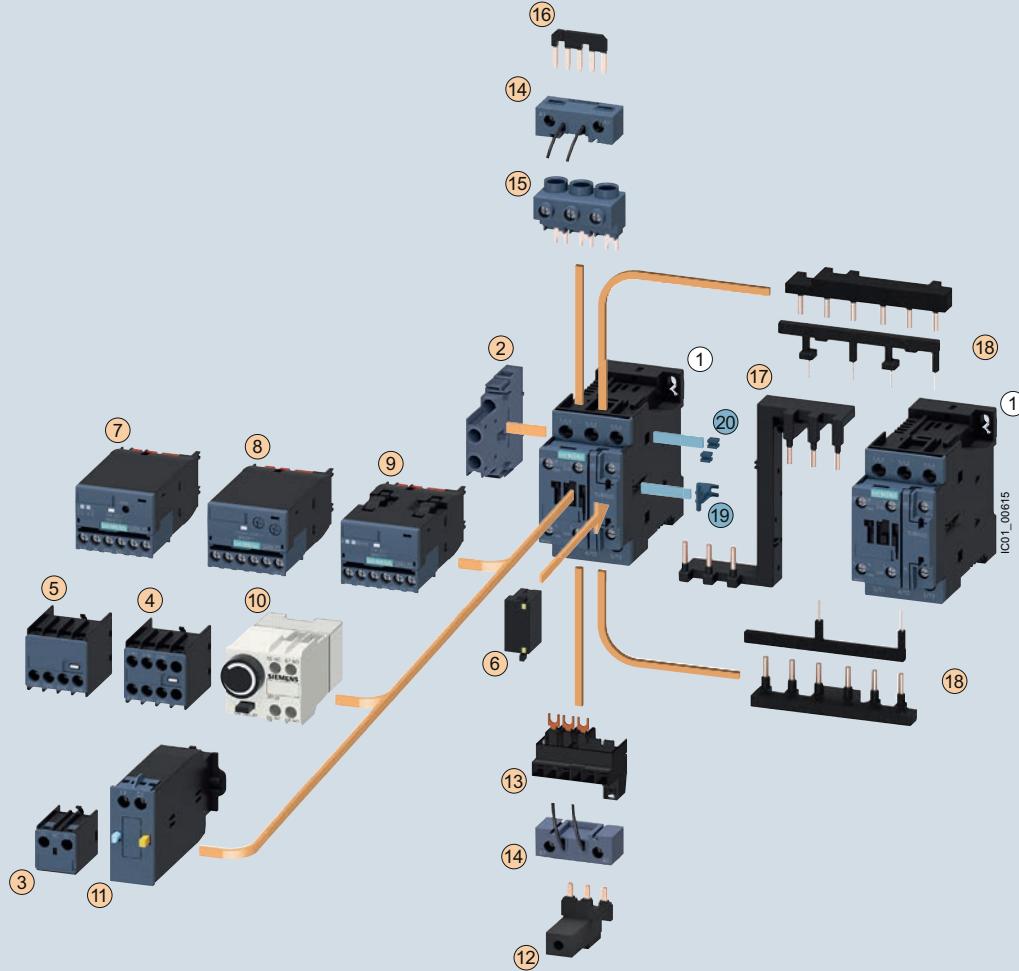

(1) Contactor size S0

- (2) 2-pole auxiliary switch block, laterally mountable
- (3) 1-pole auxiliary switch block, for snapping onto the front cable entry from the top
- (4) 4-pole auxiliary switch block, for snapping onto the front
- (5) 2-pole auxiliary switch block, for snapping onto the front cable entry from the bottom
- (6) Surge suppressor with/without LED
- (7) 3RA27 function module for AS-Interface, direct starting
- (8) 3RA28 function module
- (9) 3RA27 function module for IO-Link, direct starting
- (10) Pneumatically delayed auxiliary switch block
- (11) Mechanical latching block

- (12) Link for paralleling, 3-pole, with connecting terminal
- (13) Connection module (adapter and plug) for contactors with screw-type connection

- (14) Coil terminal module, on the top and bottom

- (15) Three-phase feeder terminal

- (16) Link for paralleling (star jumper), 3-pole, without connecting terminal

- (17) Safety main current connector for two contactors
Assembly kit 3RA2923-2AA1 comprising:

- (18) Wiring modules on the top and bottom for connecting the main current paths, electrical interlock included (NC contact interlock)

- (19) Mechanical interlocks¹⁾


- (20) Two connecting clips for two contactors¹⁾

 For contactors

 For contactors and coupling contactors


1) The parts (19) and (20) can only be ordered together as 3RA2912-2H mechanical connectors.

3RT2 contactors – Size S2 with mountable accessories

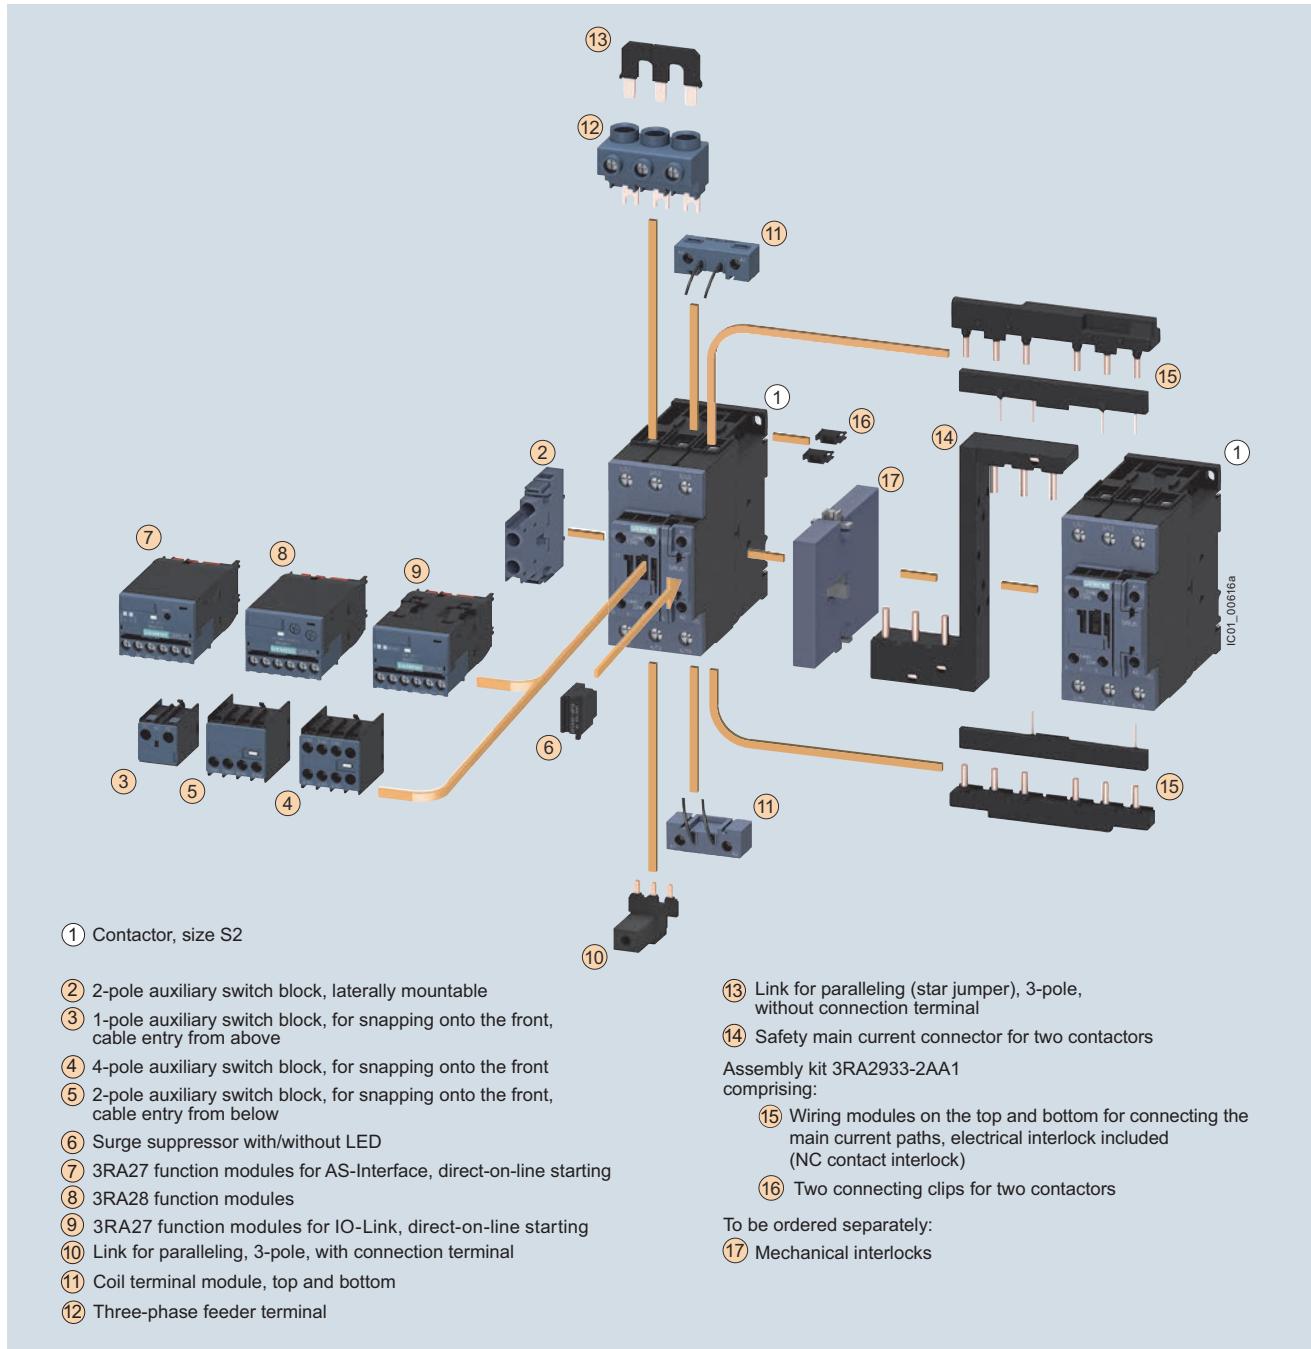

Accessories see pages 2/72 to 2/87.

3RT2 contactors – Size S3 with mountable accessories

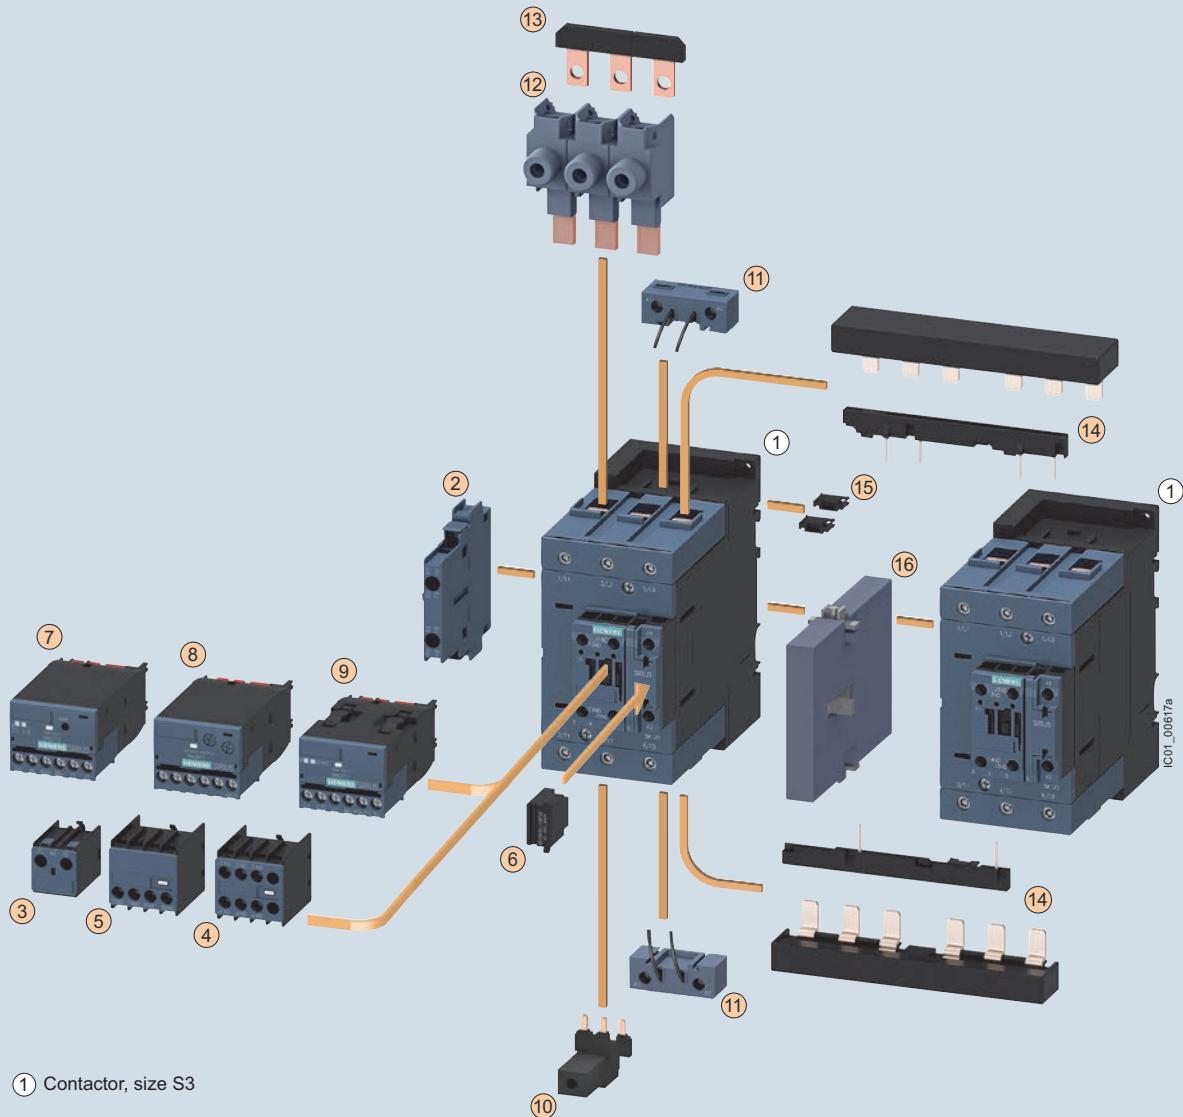

① Contactor, size S3

- ② 2-pole auxiliary switch block, laterally mountable
- ③ 1-pole auxiliary switch block, for snapping onto the front, cable entry from above
- ④ 4-pole auxiliary switch block, for snapping onto the front
- ⑤ 2-pole auxiliary switch block, for snapping onto the front, cable entry from below
- ⑥ Surge suppressor with/without LED
- ⑦ 3RA27 function modules for AS-Interface, direct-on-line starting
- ⑧ 3RA28 function modules
- ⑨ 3RA27 function modules for IO-Link, direct-on-line starting

⑩ Links for paralleling, 3-pole, with connection terminal

⑪ Coil terminal module, top and bottom

⑫ Single-phase infeed terminals (3 units)

⑬ Links for paralleling (star jumper), 3-pole without connecting terminal

Assembly kit 3RA2943-2AA1 comprising:

⑭ Wiring modules on the top and bottom for connecting the main, auxiliary and control current paths, electrical interlock¹⁾ included, can be broken off (NC contact interlock)

⑮ Two connectors for two contactors

To be ordered separately:

⑯ Mechanical interlock


¹⁾ 3RT201. contactors with one NC contact in the basic unit are required for the electrical interlock. An additional NO contact is required for momentary-contact operation.

Accessories [see pages 2/72 to 2/87](#).


Motor Starters [see Chapter 4 Combination Starters & Starters for group installation](#)

3RT1 contactors – Sizes S6 to S12 with mountable accessories

(illustration for basic unit)

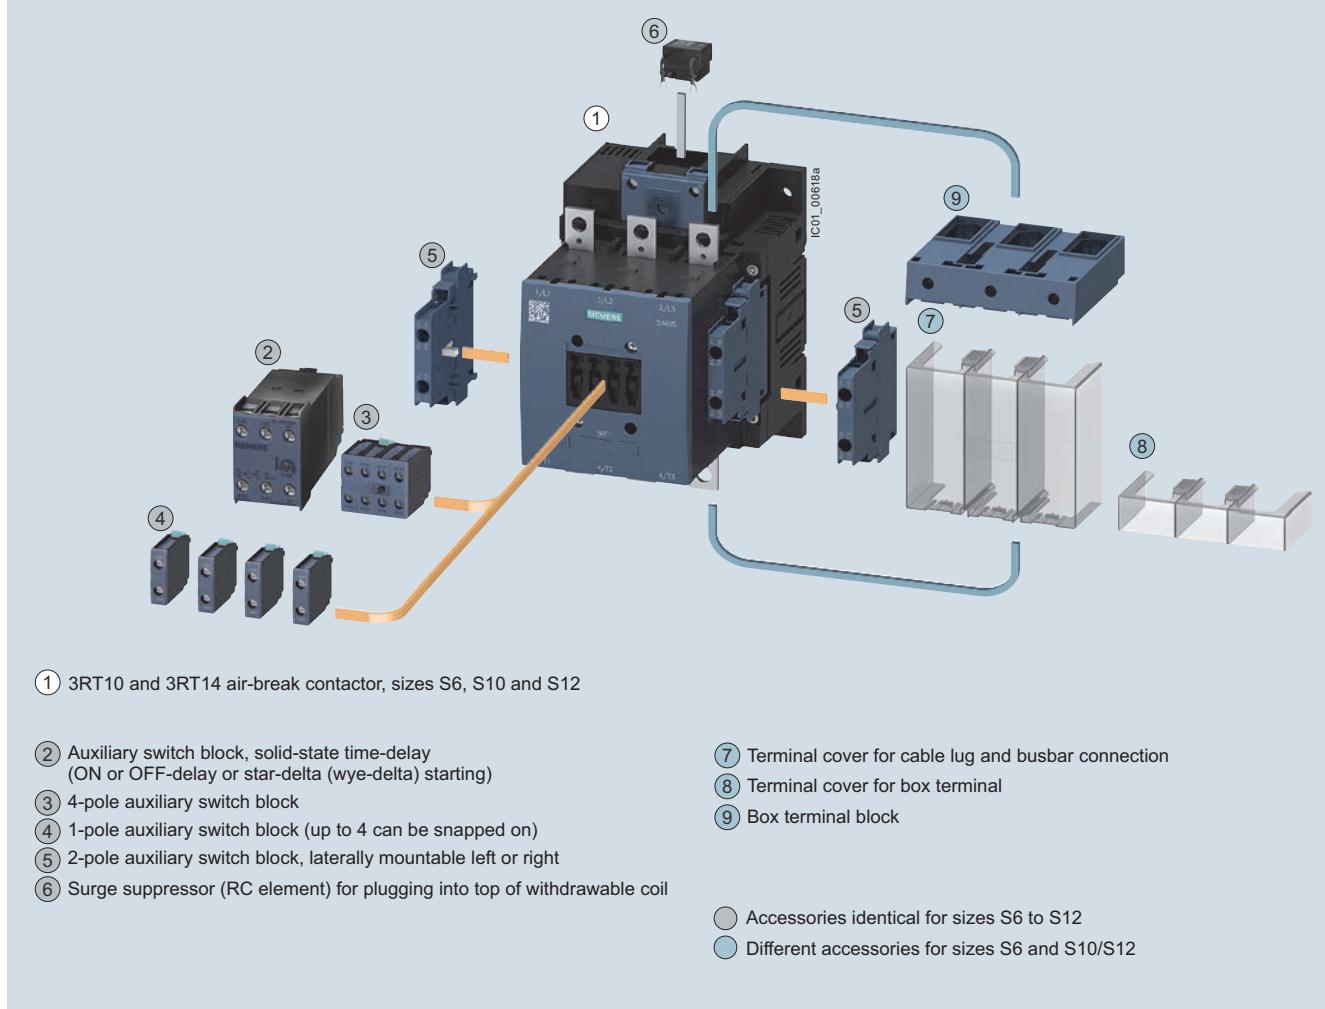For accessories [see pages 2/72 to 2/89](#).For mountable overload relays [see Chapter 3, "Overload Relays"](#).

3RT1 contactors – Sizes S6, S10 and S12 reversing contactors

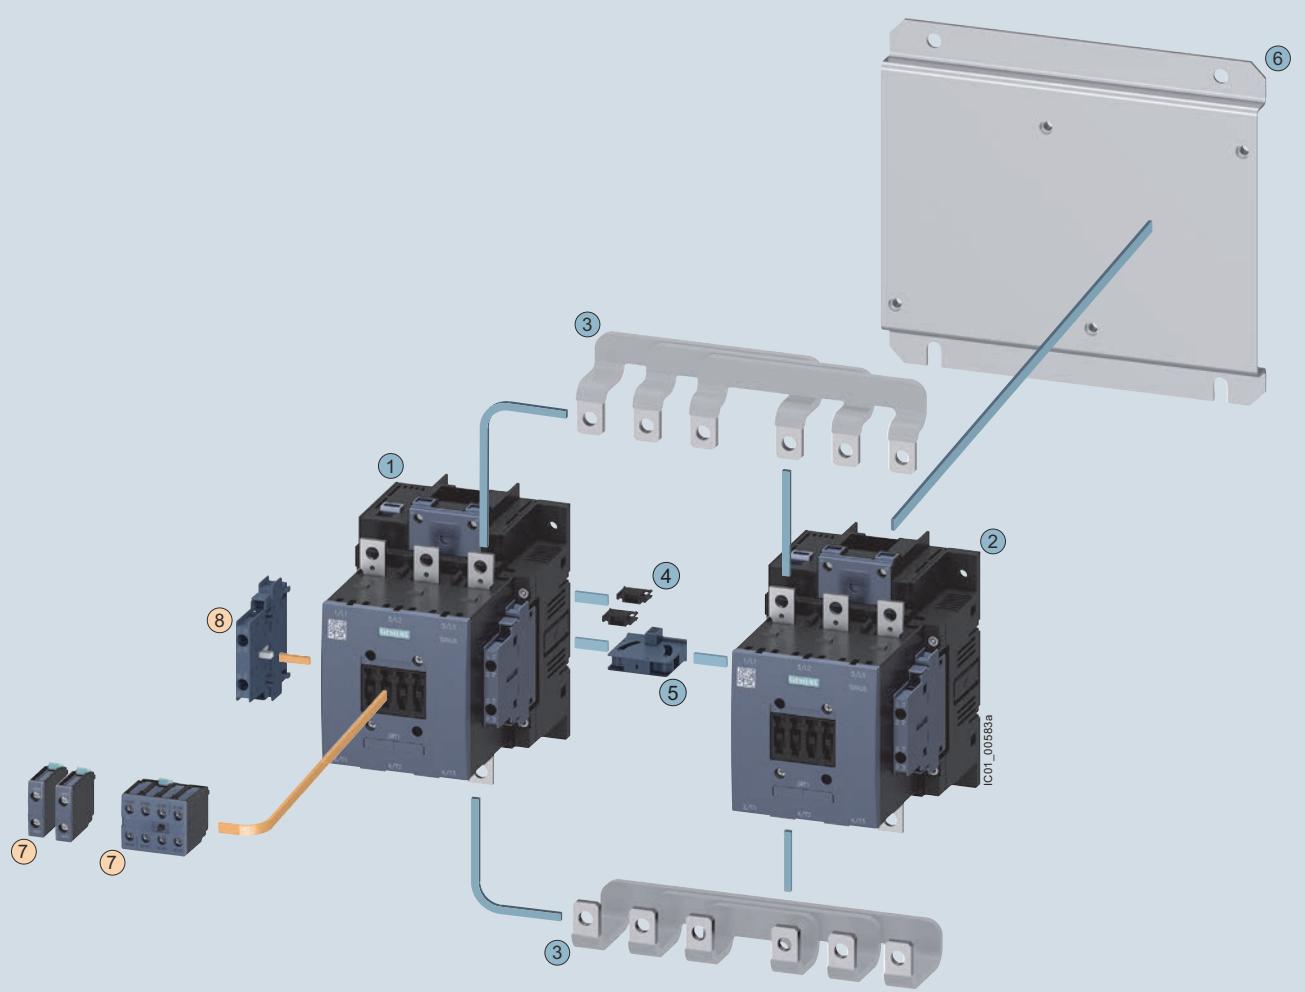

Mountable accessories (optional)

To be ordered separately Type

⑥ Auxiliary switch block, front 3RH1921
 ⑦ Auxiliary switch block, lateral 3RH1921

Reversing contactor assembly for customer assembly


Individual parts

	Type	Q11	Q12
①②	Contactors, 55 kW	3RT1.54	3RT1.54
①②	Contactors, 75 kW	3RT1.55	3RT1.55
①②	Contactors, 90 kW	3RT1.56	3RT1.56
③	Assembly kit consisting of: Wiring modules on the top and bottom for contactors without box terminals for connecting the main and auxiliary circuits, electrical interlock included (NC contact interlock)	3RA1953-2A	
④	Two connectors for two contactors	3RA1932-2D	
⑤	Mechanical interlock (must be ordered separately)	3RA1954-2A	
⑥	Base plate for reversing contactor assemblies	3RA1952-2A	

For accessories see pages 2/72-2/89.

Mountable overload relays see Chapter 3,
"Overload Relays".

3RT1 contactors – Sizes S6, S10 and S12 reversing contactors

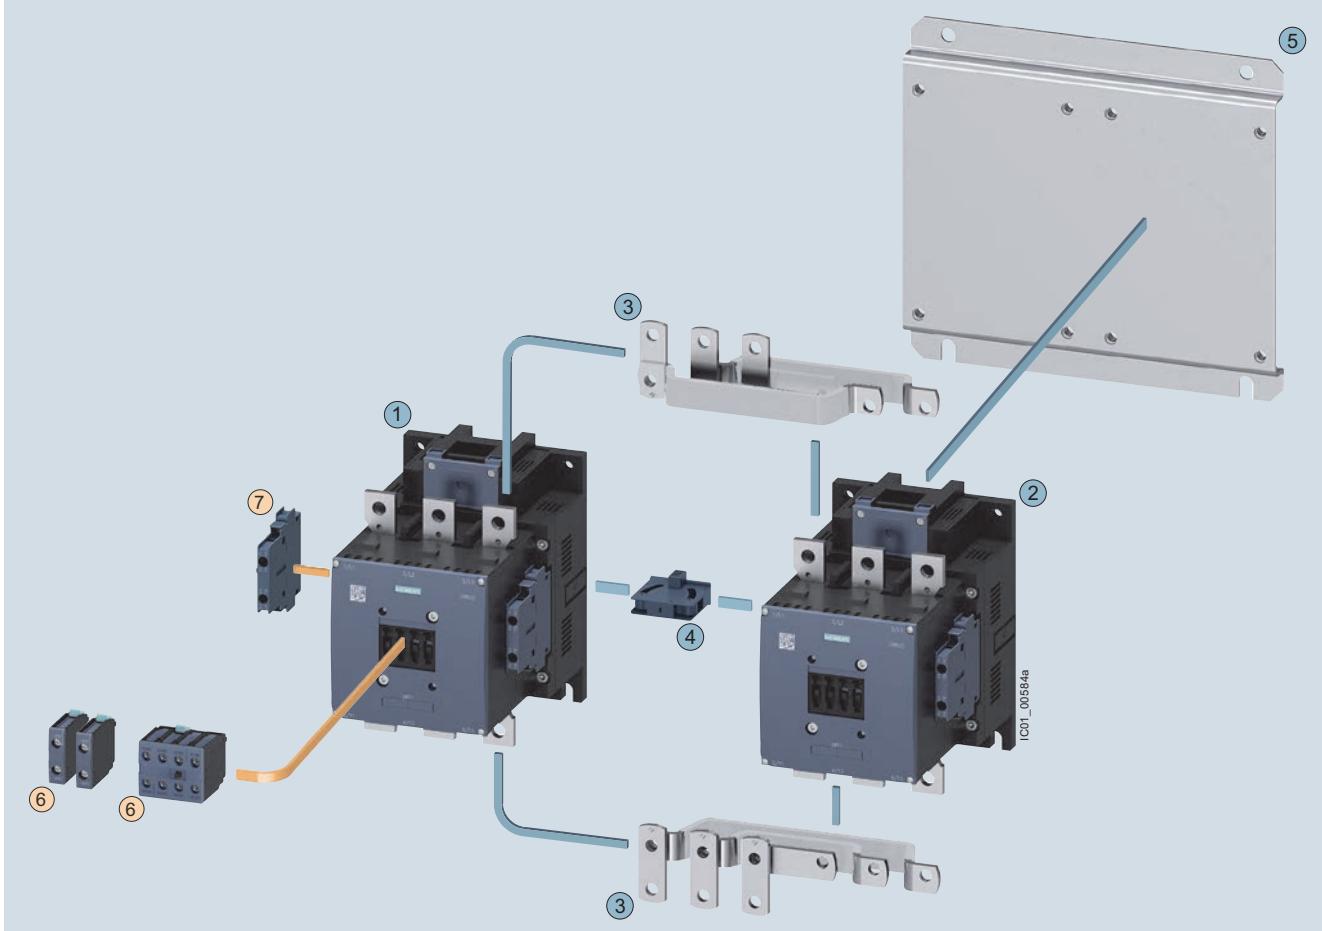

Mountable accessories (optional)

To be ordered separately Type

(6) Auxiliary switch block, front 3RH1921
 (7) Auxiliary switch block, lateral 3RH1921

Reversing contactor assembly for customer assembly


Individual parts

Type	Q11	Q12
(1) (2) Contactors, 110 kW	3RT1.64	3RT1.64
(1) (2) Contactors, 132 kW	3RT1.65	3RT1.65
(1) (2) Contactors, 160 kW	3RT1.66	3RT1.66
(3) Assembly kit consisting of: Wiring modules on the top and bottom for contactors without box terminals for connecting the main and auxiliary circuits, electrical interlock included (NC contact interlock)	3RA1963-2A	
(4) Mechanical interlock (must be ordered separately)	3RA1954-2A	
(5) Base plate for reversing contactor assemblies	3RA1962-2A	

For accessories see pages 2/72-2/89.

For mountable overload relays see Chapter 3,
 "Overload Relays".

3RT1 contactors – Sizes S6 to S12 with accessories

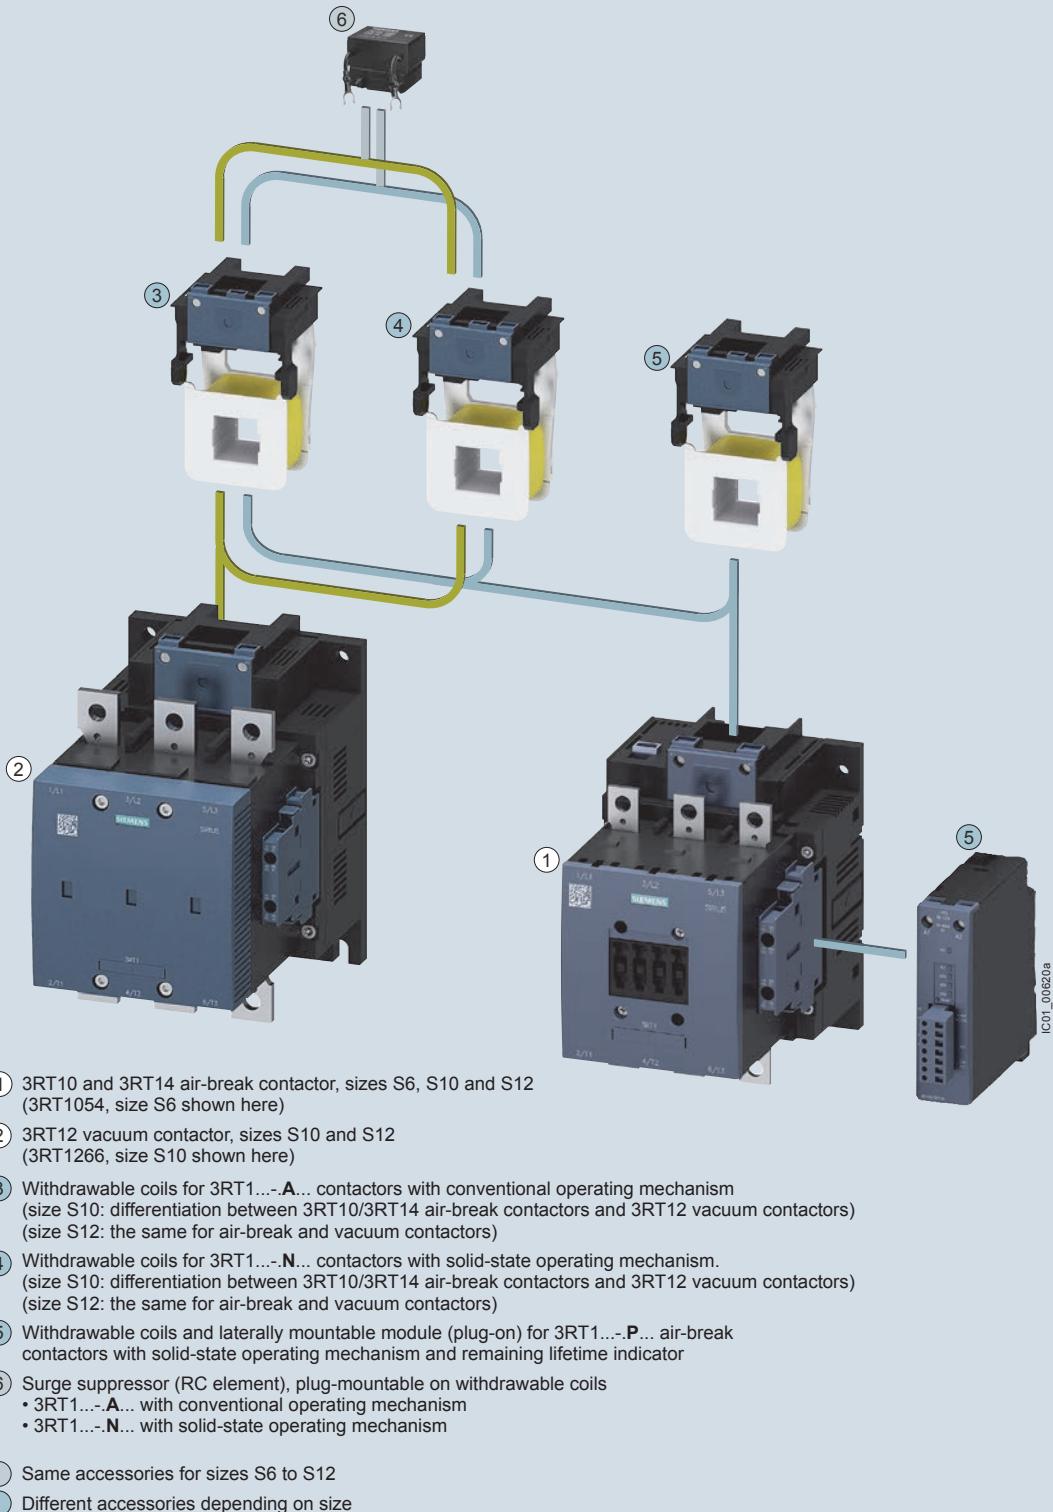

For surge suppressors [see page 2/79](#),
withdrawable coils [see page 2/105](#).

For mountable overload relays [see Chapter 3, "Overload Relays"](#).



Auxiliary switch blocks

Selection and ordering data



3RH2911-1HA01



3RH2911-2HA01



3RH19 21-1HA..



3RH19 21-2HA..

For contactors/ control relays	Rated operational Current ³⁾ 6A NEMA A600/Q600	Contactor with HS block Ident. No.	Connections position	Auxiliary contacts				Screw Terminals ¹⁾ Order No.	Spring Terminals ¹⁾ Order No.	
				Version	NO	NC	NO			
Type					NO	NC	NO	NC		

Auxiliary switch blocks for snapping onto the front according to EN 50012
(also compliant with the requirements according to EN 50005)Size S00²⁾

For assembling contactors with 2, 3, 4, or 5 auxiliary contacts

3RT201..	11E	—	1	—	—	3RH2911-1HA01	3RH2911-2HA01
Ident. No. 10E	12E	—	2	—	—	3RH2911-1HA02	3RH2911-2HA02
3RT231..	13E	—	3	—	—	3RH2911-1HA03	3RH2911-2HA03
3RT251..	21E	1	—	—	—	3RH2911-1HA10	3RH2911-2HA10
	21E	1	1	—	—	3RH2911-1HA11	3RH2911-2HA11
	22E	1	2	—	—	3RH2911-1HA12	3RH2911-2HA12
	23E	1	3	—	—	3RH2911-1HA13	3RH2911-2HA13
	31E	2	—	—	—	3RH2911-1HA20	3RH2911-2HA20
	31E	2	1	—	—	3RH2911-1HA21	3RH2911-2HA21
	32E	2	2	—	—	3RH2911-1HA22	3RH2911-2HA22
	41E	3	—	—	—	3RH2911-1HA30	3RH2911-2HA30
	41E	3	1	—	—	3RH2911-1HA31	3RH2911-2HA31

Size S0 to S3

For assembling contactors with 3, 4, or 5 auxiliary contacts

3RT202..	12E	—	1	—	—	3RH2911-1HA01	3RH2911-2HA01
Ident. No. 11E	13E	—	2	—	—	3RH2911-1HA02	3RH2911-2HA02
3RT232..	14E	—	3	—	—	3RH2911-1HA03	3RH2911-2HA03
3RT252..	21E	1	—	—	—	3RH2911-1HA10	3RH2911-2HA10
3RT203..	22E	1	1	—	—	3RH2911-1HA11	3RH2911-2HA11
3RT233..	23E	1	2	—	—	3RH2911-1HA12	3RH2911-2HA12
3RT235..	24E	1	3	—	—	3RH2911-1HA13	3RH2911-2HA13
	31E	2	—	—	—	3RH2911-1HA20	3RH2911-2HA20
	32E	2	1	—	—	3RH2911-1HA21	3RH2911-2HA21
	33E	2	2	—	—	3RH2911-1HA22	3RH2911-2HA22
	41E	3	—	—	—	3RH2911-1HA30	3RH2911-2HA30
	42E	3	1	—	—	3RH2911-1HA31	3RH2911-2HA31

Auxiliary switch blocks for snapping onto the front according to EN 50012

Sizes S6 to S12

4-pole

3RT1.. 4 to 3RT1.. 7, 3RT11..	22	(with location digits 5, 6, 7, 8)	2	2	—	3RH1921-1XA22-0MA0	3RH1921-2XA22-0MA0
-------------------------------------	----	--------------------------------------	---	---	---	--------------------	--------------------

EN50005 and EN50012 designate the markings of the auxiliary terminal numbers.

For position of the terminals see pages 2/209-2/213.

For int. circuit diagrams see page 2/197.

3RH29 aux blocks are not intended for use with 3RT1 or 3RH1 contactors and relays.

3RH19 aux blocks are not intended for use with 3RT2 or 3RH2 contactors and relays.

For auxiliary switch blocks for 3RH2140 and 3RH2440 see page 2/57.

1) The 3RH2911-HA.. aux. switches are available with ring-lug terminals. Replace the 8th digit of the Order No. with a "4".

3) UL ratings: See appendix page 19/7

2) Size S00 can be mounted according to EN 50012 only on basic units which have no integrated NC contact.



Auxiliary switch blocks

Selection and ordering data



3RH2911-1FA40



3RH2911-2FA40



3RH19 21-1C...



3RH19 21-2C...



3RH19 21-1LA...



3RH19 21-1MA...

For contactors/ control relays	Rated operational Current ³⁾ 6A NEMA A600/Q600	Contactor with HS block Ident. No.	Connections position	Auxiliary contacts				Screw Terminals ¹⁾ Order No.	Spring Terminals ¹⁾ Order No.
				Version		NO	NC		
Type									

Auxiliary switch blocks for snapping onto the front according to EN 50005

Sizes S00 to S3

2- or 4-pole auxiliary switch blocks for assembling contactors
with 3 and 5 or 4 and 6 auxiliary contacts

3RT2. 1.,	40	4	—	—	—	3RH2911-1FA40	3RH2911-2FA40
3RT2. 2.,	22	2	2	—	—	3RH2911-1FA22	3RH2911-2FA22
3RT2. 3.,	04 ¹⁾	—	4	—	—	3RH2911-1FA04	3RH2911-2FA04
3RH21 ...	11 ²⁾	—	—	1	1	3RH2911-1FB11	3RH2911-2FB11
3RH24 ..	22 ²⁾	1	1	1	1	3RH2911-1FB22	3RH2911-2FB22
	22 ²⁾	—	—	2	2	3RH2911-1FC22	3RH2911-2FC22

1- and 2-pole auxiliary switch blocks, cable entry from above or below

3RT2. 1.,	10	Top	1	—	—	3RH2911-1AA10	—
3RT2. 2.,		Bottom	1	—	—	3RH2911-1BA10	—
3RT2. 3.,	01	Top	—	1	—	3RH2911-1AA01	—
3RH21 ...		Bottom	—	1	—	3RH2911-1BA01	—
3RH24 ..	11	Top	1	1	—	3RH2911-1LA11	—
		Bottom	1	1	—	3RH2911-1MA11	—
	20	Top	2	—	—	3RH2911-1LA20	—
		Bottom	2	—	—	3RH2911-1MA20	—

Sizes S6 to S12

Single-pole auxiliary switch blocks (also compliant with EN 5001²⁾

3RT1. 4 to	—	1	—	—	—	3RH1921-1CA10	3RH1921-2CA10
3RT1. 7,	—	—	1	—	—	3RH1921-1CA01	3RH1921-2CA01
3RT11	—	—	—	1	—	3RH1921-1CD10	—
	—	—	—	—	1	3RH1921-1CD01	—

EN50005 and EN50012 designate the markings
of the auxiliary terminal numbers.

For position of the terminals see pages 2/209-2/213.
For int. circuit diagrams see page 2/197.

1) Mounting is permitted only on basic units which
have no integrated NC contact.

2) Version with early make and delayed break contacts

3) UL ratings: See appendix page 19/7



Laterally mountable auxiliary switch blocks

Selection and ordering data



3RH2911-1DA02



3RH2911-2DA02



3RH19 21-1EA..-1KA..



3RH2921-1DA02

For contactors/ control relays	Rated operational Current ⁴⁾ 6A NEMA A600/Q600	Contactor with HS block Ident. No.	Mountable to contactor/ contactor relay side	Auxiliary contacts		Screw Terminals ¹⁾ Order No.	Spring Terminals ¹⁾ Order No.
				Version	NO NC		
Type							

Laterally mountable auxiliary switch blocks according to EN 50012

Laterally mountable auxiliary switch block, 2-pole

Size S00^{1,2)}

3RT201. Ident. No. 10E	A600/Q600 A600/Q600	12E 21E	right or left right or left	— 1	2 1	3RH2911-1DA02 3RH2911-1DA11	3RH2911-2DA02 3RH2911-2DA11
---------------------------	------------------------	------------	--------------------------------	--------	--------	--------------------------------	--------------------------------

Size S0 to S3

3RT2.2. ³⁾ Ident. No. 11E	A600/Q600 A600/Q600	13E 22E	right or left right or left	— 1	2 1	3RH2921-1DA02 3RH2921-1DA11 3RH2921-1DA20	3RH2921-2DA02 3RH2921-2DA11 3RH2921-2DA20
---	------------------------	------------	--------------------------------	--------	--------	---	---

First laterally mountable auxiliary switch block, 2-pole

Sizes S6 to S12

3RT1.3 to 3RT1.7	A600/Q600		right or left	1	1	3RH1921-1DA11	3RH1921-2DA11
------------------	-----------	--	---------------	---	---	---------------	---------------

Second laterally mountable auxiliary switch block, 2-pole

Sizes S6 to S12

3RT1.4 to 3RT1.7	A300/Q300 A300/Q300 A300/Q300		right or left right or left right or left	1 2	1 —	3RH1921-1JA11	3RH1921-2JA11
------------------	-------------------------------------	--	---	--------	--------	---------------	---------------

Laterally mountable auxiliary switch blocks according to EN 50005

First laterally mountable auxiliary switch block, 2-pole

Sizes S00^{1,2)}

3RT2.1. Ident. No. 10E	A600/Q600 A600/Q600 A600/Q600	02 11 20	right or left right or left right or left	— 1 2	2 1 —	3RH2911-1DA02 3RH2911-1DA11 3RH2911-1DA20	3RH2911-2DA02 3RH2911-2DA11 3RH2911-2DA20
---------------------------	-------------------------------------	----------------	---	-------------	-------------	---	---

Sizes S0 to S3

3RT2.2., 3RT2.3. ³⁾	A600/Q600 A600/Q600 A600/Q600	02 11 20	right or left right or left right or left	— 1 2	2 1 —	3RH2921-1DA02 3RH2921-1DA11 3RH2921-1DA20	3RH2921-2DA02 3RH2921-2DA11 3RH2921-2DA20
-----------------------------------	-------------------------------------	----------------	---	-------------	-------------	---	---

Sizes S6 to S12

3RT1.4 to 3RT1.7	A300/Q300 A300/Q300 A300/Q300		right or left right or left right or left	— 1 2	2 1 —	3RH1921-1EA02 3RH1921-1EA11 3RH1921-1EA20	3RH1921-2EA02 — 3RH1921-2EA20
---------------------	-------------------------------------	--	---	-------------	-------------	---	-------------------------------------

Second laterally mountable auxiliary switch block, 2-pole

Sizes S6 to S12

3RT1.4 to 3RT1.7	A300/Q300 A300/Q300 A300/Q300		right or left right or left right or left	— 1 2	2 1 —	3RH1921-1KA02 3RH1921-1KA11 3RH1921-1KA20	3RH1921-2KA02 — 3RH1921-2KA20
---------------------	-------------------------------------	--	---	-------------	-------------	---	-------------------------------------

EN50005 and EN50012 designate the markings of the auxiliary terminal numbers.

For position of the terminals see pages 2/209-2/213.

For int. circuit diagrams see pages 2/197-2/202.

1) With size S00, mounting according to EN 50012 is permitted only on basic units which have no NC contact integrated.

3) With 3RT23.2., 3RT25.2. mountable only on the right.

4) UL ratings: See appendix page 19/7

2) Ident. No. 41, 32 and 23 according to EN 50012 is also possible. Please note the corresponding circuit diagrams for mounting 3RH2911-1DA.. on the left.



Solid-state auxiliary switch blocks

Selection and ordering data

- Operation in dusty atmospheres
- Solid-state circuits with rated operational currents I_e /AC-14 and DC-13 from 1 ... 300 mA at 3 ... 60 V
- Hard gold-plated contacts
- Mirror contacts according to EN 60947-4-1, Appendix F, for laterally mountable auxiliary switches



3RH2911-1NF02



3RH2911-2NF02



3RH2911-2DE11



3RH1921-2DE11



3RH1921-2DE11

For contactors/ control relays	Contactor with HS block Ident. No.	Mountable to contactor/ contactor relay side	Auxiliary contacts				Screw Terminals ¹⁾	Spring Terminals ¹⁾	
Type			Version	NO	NC	NO	NC	Order No.	Order No.

Solid-state compatible auxiliary switch blocks for snapping onto the front according to EN 50005¹⁾

Sizes S00 to S3

3RT2.1., 3RT2.2., 3RT2.3. 3RH21 ... 3RH24 ...	02 11 20	— 1 2	— — —	— — —	— — —	2 1 —	3RH2911-1NF02 3RH2911-1NF11 3RH2911-1NF20	3RH2911-2NF02 3RH2911-2NF11 3RH2911-2NF20
--	----------------	-------------	-------------	-------------	-------------	-------------	---	---

Sizes S6 to S12

3RT1.4 to 3RT1.7	— —	— —	1 2	1 2	1 2	1 —	3RH1921-1FE22	3RH1921-2FE22 3RH1921-2FJ22
---------------------	--------	--------	--------	--------	--------	--------	---------------	--------------------------------

Solid-state compatible auxiliary switch blocks, laterally mountable, according to EN 50012

First laterally mountable auxiliary switch block, 2-pole

Size S00 ²⁾ 3RT2.1., Ident. No. 10E	21E	right	1	—	—	1	—	3RH2911-2DE11
--	-----	-------	---	---	---	---	---	---------------

Size S0 to S3

3RT2.2, 3RT2.3 Ident. No. 10E	22E	right	1	—	—	1	—	3RH2921-2DE11
----------------------------------	-----	-------	---	---	---	---	---	---------------

Sizes S6 to S12

3RT1.4 to 3RT1.7	right or left	1	—	—	1	—	3RH1921-2DE11
---------------------	---------------	---	---	---	---	---	---------------

Second laterally mountable auxiliary switch block, 2-pole

Sizes S6 to S12	right or left	1	—	—	1	—	3RH1921-2JE11
-----------------	---------------	---	---	---	---	---	---------------

Solid-state compatible auxiliary switch blocks, laterally mountable, according to EN 50005

Size S00 3RT2.1., Ident. No. 10E	11	right or left	1	—	—	1	—	3RH2911-2DE11
--	----	---------------	---	---	---	---	---	---------------

Size S0 to S2 3RT2.2., 3RT2.3	11	right or left	1	—	—	1	—	3RH2921-2DE11
-------------------------------------	----	---------------	---	---	---	---	---	---------------

EN50005 and EN50012 designate the markings of the auxiliary terminal numbers.

For position of the terminals see pages 2/209 -2/213.
For int. circuit diagrams see pages 2/197-2/202.

1) The 3RH29 11-.NF.. auxiliary switches are also available with ring lug terminal connection. The 8th digit of the order number must be replaced with "4", e. g.: 3RH2911-1NF11 -> 3RH2911-4NF11

2) Size S00 can be mounted according to EN 50012 only on basic units which have no integrated NC contact.



Accessories for 3RT contactors / 3RH control relays

Auxiliary switch blocks, delayed

Selection and ordering data

For contactors	Rated control supply voltage U_s ¹⁾	Time setting range t	Output / auxiliary contacts	Screw Terminals	Spring Terminals			
				Type	V	Sec	Order No.	Order No.
Time-delay, solid-state auxiliary switch blocks for snapping onto the front according to DIN 46199-5								
The electrical connection between the solid-state time-delay auxiliary switch and the contactor underneath is established automatically when it is snapped on and locked into place.								
3RA2813-1AW10								
								
3RT2., 3RH21²⁾ 3RH24								
Sizes S00 to S3								
ON-delay (varistor integrated)								
24 ... 240 AC/DC	0.05 ... 100 (1, 10, 100, selectable)	1 CO 1 NO + 1 NC	3RA2813-1AW10	3RA2813-2AW10	3RA2813-2FW10			
24 ... 240 AC/DC	0.05 ... 100 (1, 10, 100, selectable)	1 CO 1 NO + 1 NC	3RA28 14-1AW10	3RA28 14-2AW10	3RA28 14-2FW10			
OFF-delay with auxiliary voltage (varistor integrated)								
24 ... 240 AC/DC	0.05 ... 100 (1, 10, 100, selectable)	1 CO 1 NO + 1 NC	3RA2815-1AW10	3RA2815-2AW10	3RA2815-2FW10			
OFF-delay without auxiliary voltage³⁾ (varistor integrated)								
24 ... 240 AC/DC	0.05 ... 100 (1, 10, 100, selectable)	1 CO 1 NO + 1 NC	3RA2815-1FW10	3RA2815-2FW10	3RA2815-2FW10			
3RT1926-2FJ11								
								
3RT10, 3RT13, 3RT14, 3RT15								
Sizes S6 to S12								
ON-delay (varistor integrated)								
24 AC/DC ⁴⁾	0.05 ... 1 0.5 ... 10 5 ... 100	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2EJ11	3RT19 26-2EJ21	3RT19 26-2EJ31			
100 ... 127 AC ⁴⁾	0.05 ... 1 0.5 ... 10 5 ... 100	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2EC11	3RT19 26-2EC21	3RT19 26-2EC31			
200 ... 240 AC ⁴⁾	0.05 ... 1 0.5 ... 10 5 ... 100	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2ED11	3RT19 26-2ED21	3RT19 26-2ED31			
OFF-delay without auxiliary voltage⁵⁾								
24 AC/DC ⁴⁾	0.05 ... 100 (1, 10, 100, selectable)	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2FJ11	3RT19 26-2FJ21	3RT19 26-2FJ31			
100 ... 127 AC ⁴⁾	0.05 ... 100 (1, 10, 100, selectable)	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2FK11	3RT19 26-2FK21	3RT19 26-2FK31			
200 ... 240 AC ⁴⁾	0.05 ... 100 (1, 10, 100, selectable)	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2FL11	3RT19 26-2FL21	3RT19 26-2FL31			
WYE-delta function								
24 AC/DC ⁴⁾	1.5 ... 30	each have:	3RT19 26-2GJ51	3RT19 26-2GC51	3RT19 26-2GD51			
100 ... 127 AC ⁴⁾	1.5 ... 30	1 NO delayed						
200 ... 240 AC ⁴⁾	1.5 ... 30	1 NO instant interval 50ms						

For technical data, see pages 2/189-2/190.
For int. circuit diagrams, see page 2/205.
For position of terminals, see page 2/213.

When the solid-state time-delay auxiliary switches are used, no other auxiliary switches are allowed to be mounted on the basic units.

1) AC voltage values apply for 50 Hz and 60 Hz.

2) Cannot be fitted onto coupling relays.

3) Setting of output contacts in as-supplied state not defined (bistable relay). Application of the control supply voltage once results in contact change-over to the correct setting.

4) Terminals A1 and A2 for the rated control supply voltage of the solid-state time-delay auxiliary switch must be connected to the associated contactor by means of connecting leads.

5) Position of the output contacts not defined in the as-delivered state (bistable relay). Applying the control voltage once results in the contacts switching to the correct position.



Selection and ordering data



3RA2812-1DW10



3RA2811-2CW10

For contactors	Rated control supply voltage U_s ¹⁾	Time setting range t	Screw terminals	Spring-type terminals	Weight
Type	V AC/DC	s	Order No.	Order No.	kg

Timing relays for mounting on 3RT2 contactors

Sizes S00 to S3

The electrical connection between the timing relay and the contactor underneath is established automatically when it is snapped on and locked.

ON-delay

Two-wire design, varistor integrated

3RT20...	24 ... 240	0.05 ... 100 (1, 10, 100; selectable)	3RA2811-1CW10	3RA2811-2CW10
3RT23...				
OFF-delay with control signal				
3RT25...	24 ... 240	0.05 ... 100 (1, 10, 100; selectable)	3RA2812-1DW10	3RA2812-2DW10
3RH21 ²⁾				
3RH24				
3RT203...	24 ... 90 90 ... 240	0.05 ... 100 (1, 10, 100; selectable)	3RA2831-1DG10 3RA2831-1DH10	3RA2831-2DG10 3RA2831-2DH10
3RT20...	24 ... 240	0.05 ... 100 (1, 10, 100; selectable)	3RA2832-1DG10 3RA2832-1DH10	3RA2832-2DG10 3RA2832-2DH10
3RT23...				
3RT25...				
3RH21 ²⁾				
3RH24				

1) AC voltage values apply for 50 Hz and 60 Hz.

2) Cannot be fitted onto coupling relays.

For description, see page 2/126.
For technical data, see page 2/189.
For circuit diagrams, see page 2/205.

1) AC voltage ratings apply for 50 and 60 Hz.

2) The 3RA28 time-delay blocks are available with spring-type terminals. Replace the 8th digit of the order number with a "2".

3) Cannot be fitted onto coupling relays



Function modules, delay blocks, and mechanical latching blocks

Selection and ordering data

	For contactors Type	Rated control supply voltage U_s ¹⁾ V	Time setting range t sec	Screw Terminals ²⁾ Order No.	Weight approx. kg
Off-delay device					
3RT2916-2B.01	Sizes S00 to S2 For contactors with DC operation. Non-adjustable delay time				
	3RT2., 3RH2...-1BF40	110 AC/DC	S00: > 0.1 S0: > 0.08; S2: > 0.25	3RT2916-2BK01	0.150
	3RT2., 3RH2...-1BM40	220 ... 230 AC/DC	S00: > 0.5 S0: > 0.3; S2: > 0.8	3RT2916-2BL01	0.150
	3RT2., 3RH2...-1BB40	24 DC	S00: > 0.2 S0: > 0.1; S2: > 0.1	3RT2916-2BE01	0.150
3RT2916-2BE01	Sizes S3 3RT2. 4	24 DC	S3: 70 fixed	3RT2916-2BE01	0.093
Pneumatic time-delay auxiliary switches for mounting on 3RT2 contactors					
3RT2927-2P.1	Size S0 Auxiliary contacts 1 NO and 1 NC³⁾				
	With ON-delay 3RT202 ⁴⁾	—	1 ... 30 10 ... 180	3RT2927-2PA01 3RT2927-2PA11	0.090 0.090
	With OFF-delay 3RT202 ⁴⁾	—	1 ... 30 10 ... 180	3RT2927-2PR01 3RT2927-2PR11	0.090 0.090
Mechanical latching blocks					
3RT2926-3AB31	For mounting onto the front of contactors The contactor remains in the energized state even after voltage failure				
	Size S0				
	3RT2. 2	24 AC/DC 110 AC/DC 230 AC/DC	— — —	3RT2926-3AB31 3RT2926-3AF31 3RT2926-3AP31	0.100 0.100 0.100

For description, see page 2/126.

For technical data, see page 2/189.

For circuit diagrams, see page 2/205.

1) AC voltage ratings apply for 50 and 60 Hz.

2) The 3RA28 time-delay blocks are available with spring-type terminals. Replace the 8th digit of the order number with a "2".

3) In addition to these, no other auxiliary contacts are permitted.

4) Cannot be fitted onto coupling contactors and coupling contactor relays.



Surge suppressors

Selection and ordering data

For contactors	Version	Rated control supply voltage U_s ¹⁾		Order No.	Weight
		AC operation	DC operation		
Type		V AC	V DC		kg

Surge suppressors without LED (also for spring-type terminals)

Size S00



3RT2916-1B.00

For plugging onto the front side of the contactors
(with and without auxiliary switch block)

3RT2.1, 3RH2.	Varistors	24 ... 48	24 ... 70	3RT2916-1BB00
		48 ... 127	70 ... 150	3RT2916-1BC00
		127 ... 240	150 ... 250	3RT2916-1BD00
		240 ... 400	--	3RT2916-1BE00
		400 ... 600	--	3RT2916-1BF00
3RT2.1, 3RH2.	RC elements	24 ... 48	24 ... 70	3RT2916-1CB00
		48 ... 127	70 ... 150	3RT2916-1CC00
		127 ... 240	150 ... 250	3RT2916-1CD00
		240 ... 400	--	3RT2916-1CE00
		400 ... 600	--	3RT2916-1CF00
3RT2.1, 3RH2.	Noise suppression diodes	--	12 ... 250	3RT2916-1DG00
3RT2.1, 3RH2.	Diode assemblies (diode and Zener diode) for DC operation	--	12 ... 250	3RT2916-1EH00

Size S0



3RT2926-1E.00

For plugging onto the front side of the contactors
(prior to mounting of the auxiliary switch block)

3RT2.2	Varistors²⁾	24 ... 48	24 ... 70	3RT2926-1BB00
		48 ... 127	70 ... 150	3RT2926-1BC00
		127 ... 240	150 ... 250	3RT2926-1BD00
		240 ... 400	--	3RT2926-1BE00
		400 ... 600	--	3RT2926-1BF00
3RT2.2	RC elements	24 ... 48	24 ... 70	3RT2926-1CB00
		48 ... 127	70 ... 150	3RT2926-1CC00
		127 ... 240	150 ... 250	3RT2926-1CD00
		240 ... 400	--	3RT2926-1CE00
		400 ... 600	--	3RT2926-1CF00
3RT2.2	Diode assembly for DC operation	--	24	3RT2926-1ER00
		--	30 ... 250	3RT2926-1ES00

Size S2 and S3



3RT2936-1B.00

For plugging onto the front side of the contactors
(prior to mounting of the auxiliary switch block)

3RT2.3, 3RT2.4.	Varistors²⁾³⁾	24 ... 48	24 ... 70	3RT2936-1BB00
		48 ... 127	70 ... 150	3RT2936-1BC00
		127 ... 240	150 ... 250	3RT2936-1BD00
		240 ... 400	--	3RT2936-1BE00
		400 ... 600	--	3RT2936-1BF00
3RT2.3, 3RT2.4.	RC elements	24 ... 48	24 ... 70	3RT2936-1CB00
		48 ... 127	70 ... 150	3RT2936-1CC00
		127 ... 240	150 ... 250	3RT2936-1CD00
		240 ... 400	--	3RT2936-1CE00
		400 ... 600	--	3RT2936-1CF00
3RT2.3, 3RT2.4.	Diode assembly³⁾ for DC operation	--	24	3RT2936-1ER00
		--	30 ... 250	3RT2936-1ES00

Size S3



3RT2936-1E.00

For plugging into the two recesses on the left next to the
connection block for auxiliary switches and coils A1 and
A2. The connecting cables are wired to A1 and A2.

3RT2.4	RC elements	24 ... 48	24 ... 70	3RT2946-1CB00
		48 ... 127	70 ... 150	3RT2946-1CC00
		127 ... 240	150 ... 250	3RT2946-1CD00
		240 ... 400	--	3RT2946-1CE00
		400 ... 600	--	3RT2946-1CF00



3RT2946-1C.00

¹⁾ Can be used for AC operation for 50/60 Hz. Please inquire about other voltages.

²⁾ The varistor is already integrated into the AC/DC contactors.

³⁾ Surge suppressors 3RT2936-1B/1E (version E03) can be used in 3RT2.4 contactors.



Accessories for 3RT contactors / 3RH control relays

Surge suppressors

2

Selection and ordering data

For contactors	Version	Rated control supply voltage U_s ¹⁾ AC operation	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Type		V AC	V DC	d			
Surge suppressors without LED							
Sizes S6 to S12							
3RT1.5 ... 3RT1.7	RC elements	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250 -- --	▶ ▶ ▶ ▶ 20	Screw terminals 3RT1956-1CB00 3RT1956-1CC00 3RT1956-1CD00 3RT1956-1CE00 3RT1956-1CF00	1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit
3RT1956-1C.00							
3RT1.5 ... 3RT1.7	RC elements	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250 -- --	▶ ▶ ▶ 2 20	Spring-loaded terminals 3RT1956-1CB02 3RT1956-1CC02 3RT1956-1CD02 3RT1956-1CE02 3RT1956-1CF02	1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit
3RT1956-1C.02							

1) Can be used for AC operation for 50/60 Hz. Other voltages on request.


For contactors	Version	Rated control supply voltage U_s ¹⁾ AC operation	SD	Article No.	Weight approx. kg	
Type		V AC	V DC	mW		
Surge suppressors with LED (also for spring-type terminals)						
Size S00 For plugging onto the front side of the contactors (with and without auxiliary switch block)						
3RT2916-1J.00	Varistor	24 ... 48 48 ... 127 127 ... 240 —	12 ... 24 24 ... 70 70 ... 150 150 ... 250	10 ... 120 20 ... 470 50 ... 700 160 ... 950	3RT2916-1JJ00 3RT2916-1JK00 3RT2916-1JL00 3RT2916-1JP00	0.010 0.010 0.010 0.010
3RT2.1, 3RH2.	Noise suppression diode	— — —	24 ... 70 50 ... 150 150 ... 250	20 ... 470 50 ... 700 160 ... 950	3RT2916-1LM00 3RT2916-1LN00 3RT2916-1LP00	0.010 0.010 0.010
3RT2926-1MR00	Size S0 For plugging onto the front side of the contactors (prior to mounting of the auxiliary switch block)					
3RT2.2	Varistor	24 ... 48 48 ... 127 127 ... 240	12 ... 24 24 ... 70 70 ... 150	10 ... 120 20 ... 470 50 ... 700	3RT2926-1JJ00 3RT2926-1JK00 3RT2926-1JL00	0.010 0.010 0.010
	Diode assembly	—	24	20 ... 470	3RT2926-1MR00	0.010
3RT2936-1J.00	Size S2 and S3 For plugging onto the front side of the contactors (prior to mounting of the auxiliary switch block)					
3RT2.3, 3RT2.4	Varistor ²⁾	24 ... 48 48 ... 127 127 ... 240	12 ... 24 24 ... 70 70 ... 150	10 ... 120 20 ... 470 50 ... 700	3RT2936-1JJ00 3RT2936-1JK00 3RT2936-1JL00	0.010 0.010 0.010

1) Can be used for AC operations for 50/60 Hz.
Other voltages on request.

2. 3RT2936 (version E03) surge suppressors can be used for 3RT2.4 contactors.



Selection and ordering data

For contactors	Version	Units	Order No.	Weight approx. kg		
Main conducting path surge suppression module for 3RT12 vacuum contactors						
Sizes S10 and S12 3RT12	For damping overvoltages and protecting the motor windings against multiple reignition when switching off three-phase motors. For connection on the contactor feeder side (2-T1/4-T2/6-T3). For separate installation. Rated operational voltage $U_e \geq 500$ V AC ... ≤ 690 V AC Rated operational voltage $U_e \leq 1000$ V AC		3RT1966-1PV3 3RT1966-1PV4	0.18 0.36		
Auxiliary conductor terminal, 3-pole						
3RT2946-4F	Size S3 3RT204.	For connecting auxiliary and control leads to the main conductor terminals (for one side).	3RT2946-4F			
Blank Labels						
3RT29 00- 1SB20	 100-0081	Unit labeling plates 20 mm x 7 mm, pastel PC labeling system for individual inscription of unitlabeling plates available from: murrplastik Systems, Inc.	340 units 816 units	3RT2900-1SB20 3RT2900-1SB10 0.200 0.294		
Links for paralleling						
 3RT1916-4BB31	 3RT1916-4BB41	 3RT1936-4BB31	 3RT1956-4BA31			
Size	For contactors	Maximum resistive current I_e /AC-1 (at 60 °C) of contactors	Max. conductor cross sections	Screw Terminals	Standard package quantity	Weight approx. kg
	Type	A		Order No.		
S00	3RT201.	3-pole, with terminal 1), 2)	4 AWG, stranded	3RT1916-4BB31		0.015
S0	3RT202.		0 AWG, stranded	3RT2926-4BB31		0.042
S2	3RT203.		95 mm ²	3RT1936-4BB31		0.139
S3	3RT204.	3-pole, with through hole (WYE jumpers) 1), 2)	185 mm ²	3RT1946-4BB31		0.205
S6	3RT1. 5		—	3RT1956-4BA31		0.159
S10/S12	3RT1. 6 3RT1. 7		—	3RT1966-4BA31		0.541
S00	3RT231. 3RT251.	4-pole, with terminal 1), 2)	4 AWG, stranded	3RT1916-4BB41		0.016

1) Can be used for AC operation for 50/60 Hz.
Please inquire about further voltages.



Selection and ordering data

For contactors	Version	Type	Order No.	Weight
EMC suppression modules; 3-phase, up to 10 HP				
Size S00 (for contactors with AC or DC operation)				
	3RT201	RC elements (3 x 220Ω/0.22 µF) Up to 400 V Up to 575 V Up to 690 V	Screw terminals 3RT2916-1PA1 3RT2916-1PA2 3RT2916-1PA3	
3RT2916-1PA.	3RT201	Varistors Up to 400 V Up to 575 V Up to 690 V	3RT2916-1PB1 3RT2916-1PB2 3RT2916-1PB3	
Coupling links for control by PLC				
	3RT2.2	Size S0 For mounting onto the coil terminals of the contactors (only for contactors with screw terminals) With LED for indicating switching state. With integrated varistor for damping opening surges. 24 V DC control, 17 ... 30 V DC operating range	3RH2924-1GP11	
3RH2924-1GP11				
Sizes S00 to S3				
	3RT2.1, 3RT2.2, 3RT2.3	For mounting on the front side of contactors with AC, DC or AC/DC operation 24 V DC control, 17 ... 30 V DC operating range	3RH2914-1GP11	
3RH2914-1GP11		24 V DC control, 17 ... 30 V DC operating range	3RH2914-2GP11	Spring-type terminals
Additional load modules				
	3RT2.1, 3RH2.	Size S00 For plugging onto the front side of the contactors with or without auxiliary switch blocks For increasing the permissible residual current and for limiting the residual voltage. It ensures the safe opening of contactors with direct control via 230 V AC semiconductor outputs of SIMATIC controllers. It acts simultaneously as a surge suppressor. Rated voltage: 50/60 Hz, 180 to 255 V AC	3RT2916-1GA00	
3RT2916-1GA00				
LED module for indicating contactor operation				
	3RT2...	Sizes S00 to S3 For snapping into the location hole of an inscription label on the front of a contactor either directly on the contactor or on the front auxiliary switch. The LED module is connected to coil terminals A1 and A2 of the contactor and indicates its energized state. Yellow LED. Rated voltage: 24 ... 240 V AC/DC, with reverse polarity protection.	3RT2926-1QT00	
3RT2926-1QT00				
Control kit				
	3RT2.1, 3RH2. 3RT2.2 3RT2.3	Sizes S00 to S3 For manual operation of the contactor contacts for start-up and service	3RT2916-4MC00 3RT2926-4MC00 3RT2936-4MC00	
3RT2916-4MC00				



Selection and ordering data

For contactors	Version	Order No.	Weight
Type			
Sealable covers			
Sizes S00 to S3			
	3RT2.1, 3RT2.2, 3RT2.3, 3RT2.4, 3RH2. ¹⁾	Sealable covers for preventing manual operation (Not suitable for coupling relays)	3RT2916-4MA10
3RT2916-4MA10			
Connection modules for contactors with screw terminals			
Sizes S00 and S0			
	3RT2.1, 3RH2.	Adapters for contactors Ambient temperature $T_{u \max} = 60^\circ\text{C}$	Screw terminals 
3RT1926-4RD01	3RT2.2	Size S00, rated operational current I_e at AC-3/400 V: 20 A	3RT1916-4RD01
		Size S0, rated operational current I_e at AC-3/400 V: 25 A	3RT1926-4RD01
	3RT2.1, 3RT2.2, 3RH2.	Plugs for contactors Size S00, S0	3RT1900-4RE01
3RT1900-4RE01			
Terminal covers for contactors with box terminals			
Size S2			
	3RT203 3RT233, 3RT253	Covers for box terminals For 3-pole contactors For 4-pole contactors (see Chapter 4)	3RT2936-4EA2 3RT2936-4EA4
3RT2936-4EA2			
Coil connection modules			
Sizes S0 and S2			
	3RT2.2, 3RT2.3	Connection from top Connection from below Connection diagonally	3RT2926-4RA11 3RT2926-4RB11 3RT2926-4RC11
3RT2926-4RA11			
	3RT2.2	Connection from top Connection from below	3RT2926-4RA12 3RT2926-4RB12
3RT2926-4RA12			
Covers for contactors with ring cable lug connections			
Size S00			
	3RT2.1, 3RH2	Covers for ring terminal lug connections Single covers	Ring terminal lug connections 
3RT2916-4EA13			3RT2916-4EA13
Size S0			
	3RT2.2	Covers for ring terminal lug connections Set for one device, comprising 4 single covers: - 2 x 3RT2926-4EB13 - 2 x 3RV2928-4AA00	3RT2926-4EB13
3RT2926-4EB13			

1) Exception: contactors and contactor relays with auxiliary switch block mounted onto the front.



Terminals, covers, adapters, connectors

2

CONTACTORS AND ASSEMBLIES

For contactors	Version	Order No.	Weight
Type			

Screw adapters for fixing the contactors

Sizes S0 and S2

3RT2.2,
3RT2.3

Screw adapters for easier screw fixing
2 units required per contactor
(1 pack contains 10 sets for 10 contactors)

3RT1926-4P

NSB0_01470

3RT1926-4P

Solder pin adapters for contactors up to 7.5 HP / 12 A

Size S00, up to 7.5 HP

3RT2.1,
3RH21

Assembly kit for soldering contactors onto a printed circuit board.
For 1 contactor, 1 set is required.

Screw terminals



3RT1916-4KA1

3RT1916-4KA1

Solder pin adapters for contactors up to 7.5 HP / 12 A with mounted 4-pole auxiliary switch block

Size S00, up to 7.5 HP

3RT2.1,
3RH21

Assembly kit for soldering contactors with an auxiliary switch block onto a printed circuit board.
For 1 contactor, 1 set is required.

3RT1916-4KA2



3RT1916-4KA2

Safety main current connectors for 2 contactors

Sizes S00 to S2

For series connection of 2 contactors

3RT2.1
3RT2.2
3RT2.3

3RA2916-1A
3RA2926-1A
3RA2936-1A

3RA2926-1A

1) Exception: contactors and contactor relays with auxiliary switch block mounted onto the front.



Selection and ordering data

For contactors	Design	Order No.	Weight approx. kg.
Size	Type		
Box terminal block for contactors with screw connections			
3RT19 5. -4G	For circular conductors and ribbon cables For connectable cross-sections, see technical data of contactors, page 2/99		
			
S3	3RT20 4	3RT29 46-4G	
S6	3RT1. 5 (3RB205)	3RT19 55-4G	0.23
S10, S12	3RT1. 6, 3RT1. 7 (3RB206)	3RT19 56-4G	0.26
		3RT19 66-4G	0.64
Covers for contactors with screw connections			
3RT29 36-4EA2	Terminal cover for box terminals		
	S2	3RT20 3	Additional shock-hazard protection for mounting on the box terminals (2 units required per contactor)
	S3	3RT20 4	
	S6	3RT1. 5	Length: 25 mm
	S10, S12	3RT1. 6, 3RT1. 7	Length: 30 mm
	Terminal cover for cable lug and busbar connection		
3RT19 46-4EA1	S3	3RT20 4	For complying with the phase clearances and as shock-hazard protection in the case of a distant box terminal ¹⁾ (2 units required per contactor)
	S6	3RT24 4	
	S6	3RT1. 5	Length: 100 mm
	S10, S12	3RT1. 6, 3RT1. 7	Length: 120 mm
	For covering bars between the contactor and 3RB20 overload relay or wiring connector for contactor assemblies		
	S6	3RT1. 5	Length: 27 mm
	S10, S12	3RT1. 6, 3RT1. 7	Length: 42 mm
Design		Order No.	Package quantity
			Weight approx. kg.
Insulation stop for securely holding back the conductor insulation on conductors up to 1 mm² (17 AWG)			
3RT1916-4JA02	Insulation stop strips can be inserted in cable entry of the spring terminal (2 strips per contactor required)		
	<ul style="list-style-type: none"> For basic devices S00 (3RT201. or 3RH2.), removable individually For auxiliary and control circuit on basic devices size S0 and S2 (3RT2.2., 3RT2.3.) and for mountable 3RH29 auxiliary switches, removable in pairs 		
3RT2916-4JA02	20 strips	0.005	
3RT1916-4JA02	20 strips	0.010	
Tool for opening spring-type terminals			
3RA2908-1A	Screwdriver for all SIRIUS devices with spring-type terminals Length: approx. 200 mm, 3.0 mm x 0.5 mm, titanium gray//black, partially insulated		
	3RA2908-1A	1 unit	0.045

1) Refer to the note on page 2/149, conductor cross-sections.




Contactor Assemblies for Switching Motors

3RA13, 3RA23 reversing contactor assemblies

2

CONTACTORS AND ASSEMBLIES

Accessories

For contactors	Size	Design	Order No.	Weight approx. kg
Type				
Mechanical interlocks				
3RA19 24-2B	3RT2.3	S2	laterally mountable for 3RT2 S2 contactors only. There are no NC auxiliary contacts. Use the integrated NC auxiliary on the contactor.	3RA2934-2B 0.04
				
3RA19 54-2G	3RT204 to 3RT105	S3 to S6	laterally mountable each with one auxiliary contact (1 NC) per contactor (can only couple contactors of max. 1 level different size. The mounting depth of the smaller contactor has to be adapted.) Interlock width: 10 mm	3RA2934-2B 0.05
				
3RA19 54-2A	3RT1. 5 to 3RT1. 7	S6, S10, S12	adapter to mechanically interlock a 3RT204 with a 3RT105 includes the adapter and QTY 2 - 3RA1942-2G mechanical connectors requires the 3RA1954 - 2A to be ordered separately Note: Fits 3RT104 AC coil versions only. Does not fit 3RT104 DC coil versions.	3RA1954-2G
				
Baseplates				
3RA1972-2A	3RT10 5	S6	for customer mounting of contactor assemblies for reversing	3RA1952-2A 1.3
				
3RT1. 6	S10			3RA1962-2A 2.4
3RT1. 7	S12			3RA1972-2A 2.6
				1 unit

1) Can also be used for size S3 4-pole contactors.



Contactor Assemblies for Switching Motors

3RA13, 3RA23 reversing contactor assemblies

Accessories

For contactors Type	Size	Details	Screw Terminals Order No.	Spring Terminals Order No.	Pkg. qty.
Assembly kits for making 3-pole contactor assemblies					
3RA2913-2AA1	3RT201	S00 The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, Wiring modules on the top and bottom • For main, auxiliary and control circuits	3RA2913-2AA1	3RA2913-2AA2	1 kit
3RA2923-2AA2	3RT202	S0 The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, Wiring modules on the top and bottom • For main, auxiliary and control circuits ¹⁾ • Only for main circuit ²⁾	3RA2923-2AA1	—	1 kit
				3RA2923-2AA2	1 kit
3RA2933-2AA1	3RT203	S2 The installation kit contains: 2 connecting clips for 2 contactors, Wiring modules on the top and bottom • Only for main circuit ³⁾	3RA2933-2AA1	—	1 kit
				3RA2933-2AA2	1 kit
3RA2943-2AA1	3RT204	S3 The installation kit contains: 2 connecting clips for 2 contactors, Wiring modules on the top and bottom and the mechanical interlock	3RA2943-2AA1	—	
3RA19 53-2A	3RT105	S6 The installation kit contains: Wiring modules on the top and bottom (for connection with box terminal)	3RA19 53-2A	—	1 kit
	NSB0_01725				
3RT105 3RT1. 6 3RT1. 7	S6 S10 S12	The installation kit contains: Wiring modules on the top and bottom (for connection without box terminals)	3RA1953-2M 3RA1963-2A 3RA1973-2A		1 kit
	NSB0_01725				

1) Use of the 3RA2923-2AA1 assembly kit in conjunction with the 3RT202-.....-3MA0 contactors is limited because the auxiliary switches in the basic unit are not allowed to be used on account of the permanently mounted auxiliary switch block.

2) Version in size S0 with spring-type terminals: Only the wiring modules for the main circuit are included. No connectors are included for the auxiliary and control circuit.

3) Version in size S2 with spring-type terminals in the auxiliary and control circuits: Only the wiring modules for the main circuit are included. A cable set is included for the auxiliary circuit.



Contactors and Contactor Assemblies

Contactor Assemblies for Switching Motors

3RA13, 3RA23 reversing contactor assemblies

2

CONTACTORS AND ASSEMBLIES

Accessories

Type	For contactors	Size	Contactor gap for interlock	Version	Screw Terminals Order No.	Spring Terminals Order No.	Pkg. qty.
Wiring modules							
3RA2913-3DA1	3RT201	S00- S00	0 mm	Top (in-phase) Bottom (phase reversal)	3RA2913-3DA1 3RA2913-3EA1	3RA2913-3DA2 3RA2913-3EA2	1 1
	3RT202	S0- S0	0 mm	Top (in-phase) Bottom (phase reversal)	3RA2923-3DA1 3RA2923-3EA1	3RA2923-3DA2 3RA2923-3EA2	1 1
3RA2913-3EA1	3RT203	S2- S2	10 mm	Top (in-phase) Bottom (phase reversal)	3RA1933-3D 3RA1933-3E	3RA1933-3D 3RA1933-3E	1 1
	3RT204	S3- S3	10 mm	Top (in-phase) Bottom (phase reversal)	3RA1943-3D 3RA1943-3E	3RA1943-3D 3RA1943-3E	1 1
3RA1953-3D	3RT105	S6- S6	10 mm	Top (in-phase, for connection with box terminal)	3RA1953-3D	3RA1953-3D	1
3RA1953-3P				Top (with phase reversal, for connection without box terminal)	3RA1953-3P	3RA1953-3P	1
Type	For contactors	Size	Contactor gap for interlock	Interlock Type	Version	Order No.	Pkg. qty.
Mechanical connectors¹⁾							
3RA29.2-2H	3RT201	S00- S00	0 mm	Laterally mountable	For 3-pole contactors and 4-pole contactors	3RA2912-2H	1 set
	3RT202	S0- S0	0 mm	Laterally mountable	For 3-pole contactors and 4-pole contactors	3RA2922-2H	1 set
3RA2932-2C	3RT203	S2- S2	0 mm	Laterally mountable	For 3-pole contactors	3RA2932-2C	5 sets
			10 mm	Laterally mountable	For 3-pole contactors	3RA2932-2D	5 sets
3RA2932-2D	3RT233			Laterally mountable	For 4-pole contactors	3RA2932-2G	5 sets
	3RT2.4	S3- S3	0 mm	Mountable on front	For 3-pole contactors	3RA2932-2C	10 sets
3RA2932-2G			10 mm	Laterally mountable	For 3-pole contactors	3RA2932-2D	10 sets
					For 4-pole contactors	3RA2942-2G	10 sets
3RA1942-2G	3RT1.5	S6- S6	10 mm	Laterally mountable	Top (with phase reversal, for connection without box terminal)	3RA1932-2D	10 sets

Note: Standard package quantities may change.
Check Industry Mall for current package quantities.




1) 1 set for 1 contactor. Size S00 & S0: 1 set includes 2 connectors and 1 interlock. **Size S2:** The mechanical interlock must be ordered separately. S3-S6: 1 set includes 2 connectors; one connector for top and one connector for bottom.



Contactor Assemblies for Switching Motors

WYE-delta accessories

Accessories

Design	Sizes	Order No.	Weight approx. kg	
Installation kits^{1) 2)}				
	The installation kit contains: Mechanical interlock, 4 connecting clips, WYE jumper, Wiring connectors on the top and bottom,- For main, auxiliary, and control circuits ³⁾	S00-S00-S00 3RA2913-2BB1	1 set 0.05	
3RA19 53-2B				
	The installation kit contains: mechanical interlock, 4 connecting clips, WYE jumper, wiring connectors on the top and bottom - For main, auxiliary, and control circuits ³⁾	S0-S0-S0 3RA2923-2BB1 S2-S2-S0 3RA2933-2C S2-S2-S2 3RA2933-2BB1	1 set 0.10 1 set 0.16 0.16	
3RA19 53-2N, 3RA19 63-2B, 3RA19 73-2B				
	The installation kit contains: WYE jumper on the top Wiring jumper on the bottom (The wiring connector on the top is not included in the scope of supply. A double infeed between the line contactor and the delta contactor is recommended.)	S3-S3-S2 3RA2943-2C S3-S3-S3 3RA2943-2BB1 S6-S6-S6 3RA1953-2B S6-S6-S6 3RA1953-2N S10-S10-S10 3RA1963-2B S12-S12-S12 3RA1973-2B	0.33 0.16 0.85 0.60 1.80 2.20	
3-phase feeder terminal				
	Feeder terminal block for the line contactor for large conductor cross-sections		1 unit	
	Conductor cross-section: 6 mm ² , 10 AWG	S00 3RA2913-3K	0.02	
	Conductor cross-section: 16 mm ² , 6 AWG	S0 3RV2925-5AB	0.04	
	Conductor cross-section: 70 mm ² , 2/0 AWG	S2 3RV2935-5A	0.10	
1-phase feeder terminals				
	Conductor cross-section: 95 mm ²	S3 3RA2943-3L	0.280	
3-phase busbar				
	For in-phase bridging of all input terminals of the line contactor (K1) and the delta contactor (K3)	S0 3RV1915-1AB S2 3RV2935-5E	1 unit 0.03 0.15	
Link for paralleling, 3-pole (WYE jumpers)				
	Without terminal (the links for paralleling can be reduced by one pole)	S00¹⁾ S0¹⁾ S2 S3 S6⁴⁾ S10, S12⁴⁾	3RT1916-4BA31 3RT1926-4BA31 3RT1936-4BA31 3RT1946-4BA31 3RT1956-4BA31 3RT1966-4BA31	1 unit 0.010 0.020 0.02 0.02 0.15
Baseplates				
	For customer assembly of WYE-delta contactor assemblies with a laterally mounted time-delay		1 unit	
	Side-by-side mounting		3RA2932-2F	0.45
	10 mm clearance between K3 and K2		3RA2932-2F	0.48
	Side-by-side mounting		3RA2942-2F	0.72
	Side-by-side mounting		3RA2942-2F	0.72
	10 mm clearance between K1, K3 and K2			1 unit
		S. S. S.	3RA1952-2E	2.0
		S6 S6 S3	3RA1952-2F	2.1
		S6 S6 S6	3RA1962-2E	
		S10 S10 S6	3RA1962-2F	
		S10 S10 S10	3RA1962-2F	
		S12 S12 S10	3RA1972-2E	
		S12 S12 S12	3RA1972-2F	

1) Size S00, S0 and S2 installation kits for paralleling are available in spring-type terminals.
Change the last digit of the order number to a "2".

2) When using the function modules for wye-delta starting, the wiring modules for the auxiliary current are not required. [See page 2/51](#) for more information.

3) Also requires quantity (1) 3RA2816-0EW20 function module set for all control functions.
[See page 2/51](#).

4) The 3RT19 56-4EA1 (S6) or 3RT19 66-4EA1 (S10, S12) cover can be used for shock-hazard protection.



Contactor Assemblies for Switching Motors

3RA13, 3RA23 reversing contactor assemblies

2

CONTACTORS AND ASSEMBLIES

Accessories

Overview graphic for 3RT135 to 3RT137 contactors with mountable accessories, see page 4/23.

More information

Equipment Manual, see
<https://support.industry.siemens.com/cs/ww/en/view/60306557>

For contactors	Auxiliary contacts Version				Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Type	NO	NC	Left	Right				
Second auxiliary switch (1 NO + 1 NC)								
3RH1951-1SA11	Lateral mounting on the right and/or the left, 2-pole				Screw terminals 3RH1951-1SA11			
Terminal covers								
3RT1956-4EB10	Two units required per contactor (1 set = 2 units) Either bus connectors offset or terminal covers can be used.	3RT135	--	--	3RT1956-4EB10		1	1 unit
3RT1966-4EB10		3RT136	--	--	3RT1966-4EB10		1	1 unit
3RT1976-4EB10		3RT137	--	--	3RT1976-4EB10		1	1 unit
Bus connectors offset								
3RT1966-4D	(Two units required per contactor) Either terminal covers or bus connectors offset can be used.	3RT136	--	--	3RT1966-4D		1	1 unit
3RT1976-4D		3RT137	--	--	3RT1976-4D		1	1 unit
Mechanical interlocks for contactor assemblies								
3RA1954-3A	Enables two 3RT13 contactors of the same size (S6, S10 and S12) to be interlocked with each other. The laterally mounted auxiliary switches of the contactor must be removed beforehand. The mechanical interlock cannot be used in conjunction with the bus connectors offset.	3RT135 ... 3RT137	--	--	3RA1954-3A		1	1 unit

Spare parts


For contactors	Auxiliary contacts Version				Screw terminals	PU (UNIT, SET, M)	PS*	
Type	NO	NC	Left	Right	Article No.	Price per PU		
First auxiliary switch (1 NO + 1 NC)								
3RH1951-1TA11	Lateral mounting on the right and/or the left, 2-pole	3RT135 ... 3RT137	1	1	3RH1951-1TA11		1	1 unit



Contactor Assemblies for Switching Motors

Current Monitoring Relays

Overview

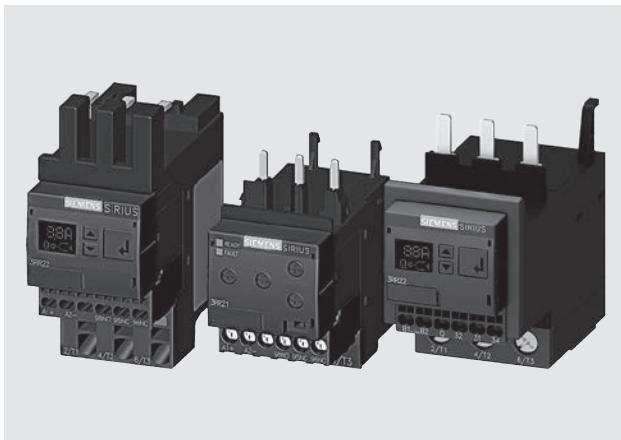

SIRIUS 3RR2242, 3RR2142 and 3RR2243 current monitoring relays

The SIRIUS 3RR2 current monitoring relays are suitable for the load monitoring of motors or other loads. In two or three phases they monitor the rms value of AC currents for overshooting or undershooting of set threshold values.

Whereas apparent current monitoring is used above all in connection with the rated torque or in case of overload, the active current monitoring option can be used to observe and evaluate the load factor over a motor's entire torque range.

The 3RR2 current monitoring relays can be integrated directly in the feeder by mounting onto the 3RT2 contactor; separate wiring of the main circuit is therefore superfluous. No separate transformers are required.

For a line-oriented configuration or simultaneous use of an overload relay, terminal supports for stand-alone installation are available for separate standard rail mounting.

Versions

Basic versions

The basic versions with two-phase apparent current monitoring, a CO contact output and analog adjustability provide a high level of monitoring reliability especially in the rated and overload range.

Standard versions

The standard versions monitor the current in three phases with selectable active current monitoring. They have additional diagnostics options such as residual current monitoring and phase sequence monitoring, and they are also suitable for monitoring motors below the rated torque. These devices have an additional independent semiconductor output, an actual value indicator, and are digitally adjustable.

Both versions are available optionally with screw or spring-type terminals, in each case for sizes S00 and S0. With variants of size S2 the main current paths always have screw terminals; the control current side can have screw or spring-type terminals.

Note:

In addition to the features of the standard versions, 3RR24 monitoring relays for mounting onto 3RT2 contactors for IO-Link also offer the possibility of transmitting the measured values and diagnostics data to a controller via an IO-Link. Furthermore, the devices can be parameterized on the devices themselves or via IO-Link.

Benefits

- Can be mounted directly on 3RT2 contactors and 3RA23 reversing contactor assemblies, in other words, there is no need for additional wiring in the main circuit
- Optimally coordinated with the technical characteristics of the 3RT2 contactors
- No separate current transformer required
- Versions with wide voltage supply range
- Variably adjustable to overshoot, undershoot or range monitoring
- Freely configurable delay times and RESET response
- Display of ACTUAL value and status messages
- All versions with removable control current terminals
- All versions with screw terminals or spring-type terminals
- Simple determination of the threshold values through direct reference to actually measured values for setpoint loading
- Range monitoring and selectable active current measurement mean that only one device for monitoring a motor is required along the entire torque curve
- In addition to current monitoring it is also possible to monitor for broken cables, phase failure, phase sequence, residual current and motor blocking

Application

- Monitoring of current overshoot and undershoot
- Monitoring of broken conductors
- Monitoring of no-load operation and load shedding, e.g. in the event of a torn V-belt or no-load operation of a pump
- Monitoring of overload, e.g. on conveyor belts or cranes due to an excessive load
- Monitoring the functionality of electrical loads such as heaters
- Monitoring of wrong phase sequence on mobile equipment such as compressors or cranes
- Monitoring of high-impedance faults to ground, e.g. caused by damaged insulation or moisture



Contactor Assemblies for Switching Motors

Current Monitoring Relays

2


CONTACTORS AND ASSEMBLIES

Technical specifications


Function charts of 3RR2141-1A.30 basic variants, analog dial adjustable

Closed-circuit principle upon application of the control supply voltage


Current overshoot

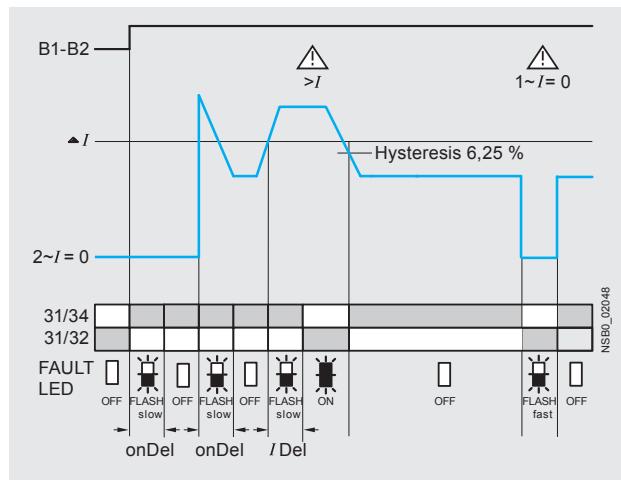


Range monitoring

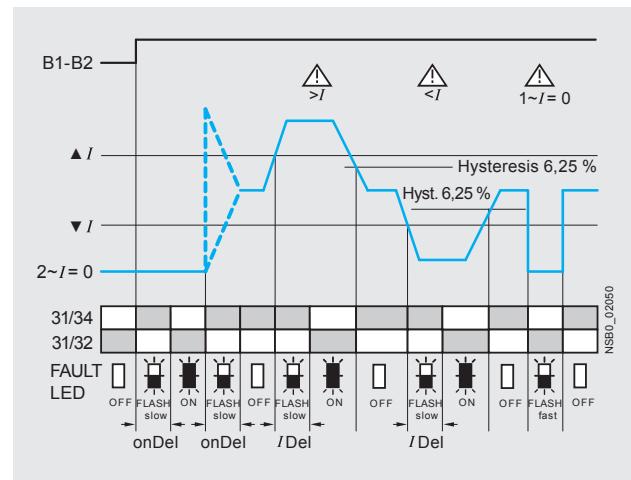

Current undershoot

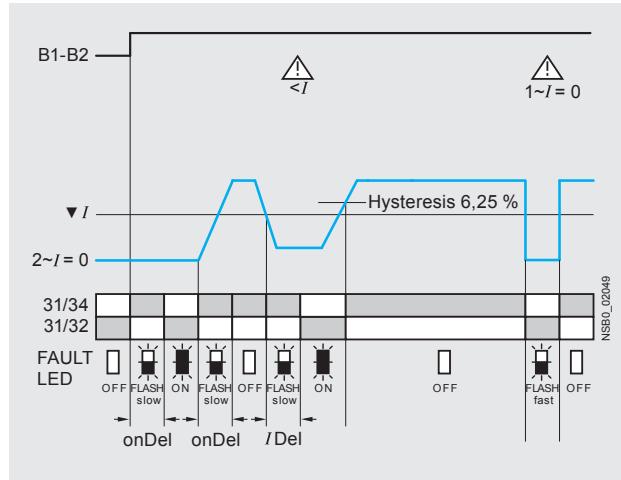


Circuit diagrams

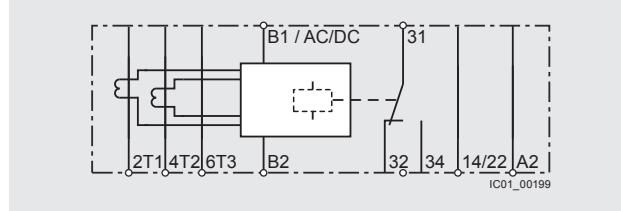

3RR2141-1A.30

Note:

It is not necessary to protect the measuring circuit for device protection. The protective device for line protection depends on the cross-section used.

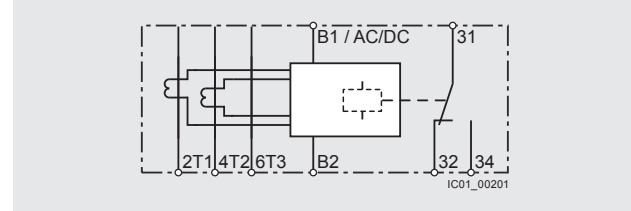

3RR2141-2A.30, 3RR2142-A.30, 3RR2143-A.30



Contactors and Contactor Assemblies


Contactor Assemblies for Switching Motors

Current Monitoring Relays


Function charts of 3RR224.-.F.30 standard versions, digitally adjustable

With the closed-circuit principle selected upon application of the control supply voltage


Current overshoot

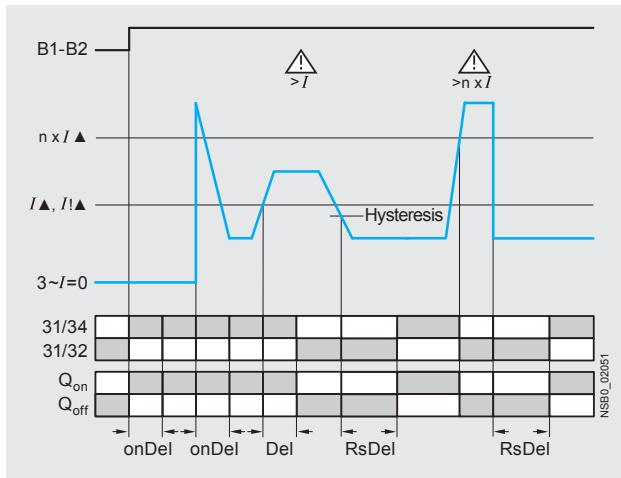


Range monitoring

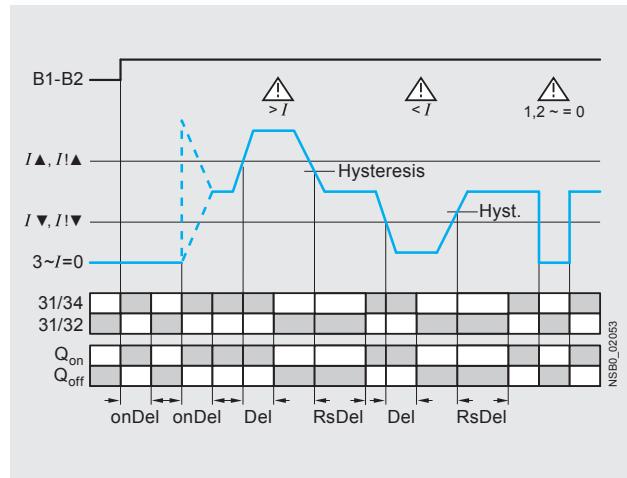


Current undershoot with residual current monitoring

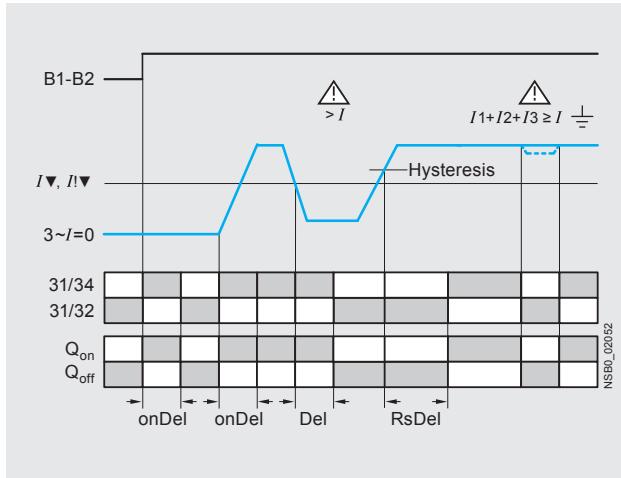


Phase sequence monitoring

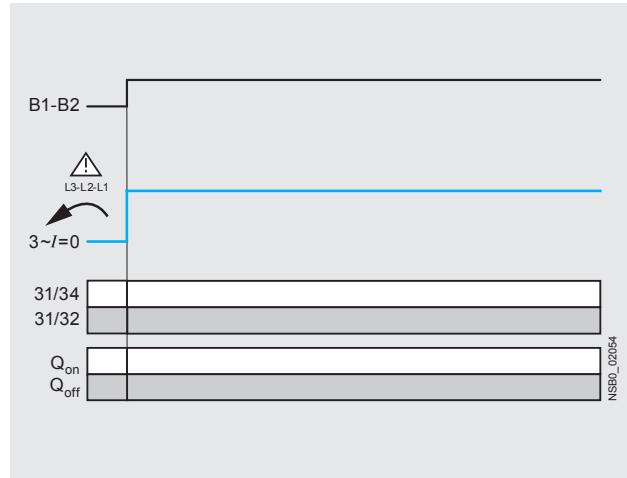

Circuit diagrams

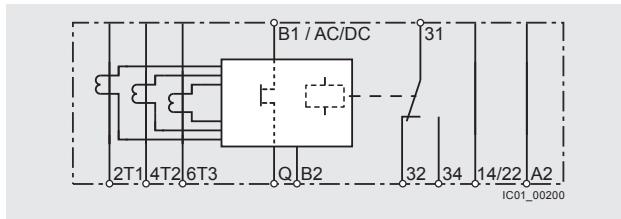

3RR2241-1F.30

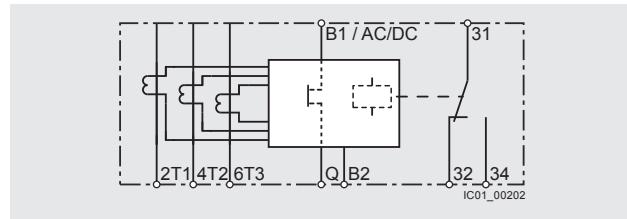

3RR2241-2F.30, 3RR2242-F.30, 3RR2243-F.30

Note:

It is not necessary to protect the measuring circuit for device protection. The protective device for line protection depends on the cross-section used.



Contactor Assemblies for Switching Motors

Current Monitoring Relays

2

Selection and ordering data

SIRIUS 3RR21/3RR22 current monitoring relays

- For load monitoring of motors or other loads
- Multi-phase monitoring of undercurrent and overcurrent
- Starting and tripping delay can be adjusted separately
- Tripping delay 0 to 30 s
- Auto or Manual RESET



3RR2141-1AW30



3RR2142-1AW30



3RR2241-1FW30



3RR2242-1FW30



3RR2141-2AA30



3RR2243-3FW30

Size	Measuring range	Hysteresis	Control supply voltage U_s	Screw terminals	Spring-type terminals
				A	A

Basic versions

- Analogically adjustable
- Closed-circuit principle
- 1 CO contact
- 2-phase current monitoring
- Apparent current monitoring
- Start-up delay 0 ... 60 s

S00	1.6 ... 16	6.25 % of threshold value	24 AC/DC 24 ... 240 AC/DC	3RR2141-1AA30 3RR2141-1AW30	3RR2141-2AA30 3RR2141-2AW30
S0	4 ... 40	6.25 % of threshold value	24 AC/DC 24 ... 240 AC/DC	3RR2142-1AA30 3RR2142-1AW30	3RR2142-2AA30 3RR2142-2AW30
S2	8 ... 80	6.25 % of threshold value	24 AC/DC 24 ... 240 AC/DC	3RR2143-1AA30 3RR2143-1AW30	3RR2143-3AA30 3RR2143-3AW30

Standard versions

- Digitally adjustable
- LC display
- Open or closed-circuit principle
- 1 CO contact
- 1 semiconductor output
- 3-phase current monitoring
- Active current or apparent current monitoring
- Phase sequence monitoring
- Residual current monitoring
- Blocking current monitoring
- Reclosing delay time 0 ... 300 min
- Start-up delay 0 ... 99 s
- Separate settings for warning and alarm thresholds


S00	1.6 ... 16	0.1 ... 3	24 AC/DC 24 ... 240 AC/DC	3RR2241-1FA30 3RR2241-1FW30	3RR2241-2FA30 3RR2241-2FW30
S0	4 ... 40	0.1 ... 8	24 AC/DC 24 ... 240 AC/DC	3RR2242-1FA30 3RR2242-1FW30	3RR2242-2FA30 3RR2242-2FW30
S2	8 ... 80	0.2 ... 16	24 AC/DC 24 ... 240 AC/DC	3RR2243-1FA30 3RR2243-1FW30	3RR2243-3FA30 3RR2243-3FW30



Contactor Assemblies for Switching Motors

Current Monitoring Relays with IO-Link

Overview

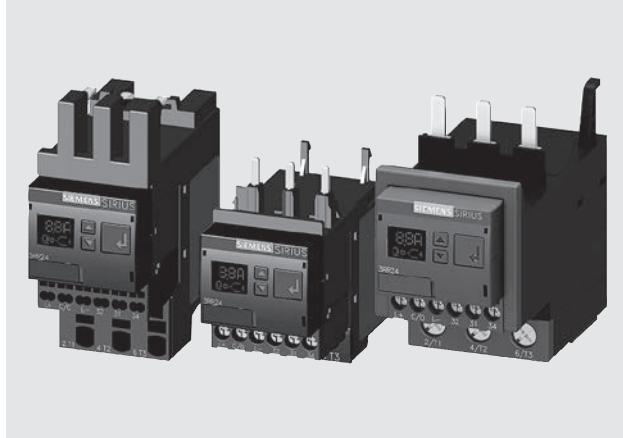

SIRIUS 3RR2441, 3RR2442 and 3RR2443 current monitoring relays

The SIRIUS 3RR24 current monitoring relays for IO-Link are suitable for the load monitoring of motors or other loads. In three phases they monitor the rms value of AC currents for overshooting or undershooting of set threshold values.

Whereas apparent current monitoring is used above all in connection with the rated torque or in case of overload, the active current monitoring option, which is also selectable, can be used to observe and evaluate the load factor over a motor's entire torque range.

The 3RR24 current monitoring relays for IO-Link can be integrated directly in the feeder by mounting onto the 3RT2 contactor; separate wiring of the main circuit is therefore superfluous. No separate transformers are required.

For a line-oriented configuration or simultaneous use of an overload relay, terminal supports for stand-alone installation are available for separate standard rail mounting.

The SIRIUS 3RR24 current monitoring relays for IO-Link also offer many other options based upon the monitoring functions of the conventional SIRIUS 3RR2 monitoring relays:

- Measured value transmission to a controller, including resolution and unit, may be parameterizable as to which value is cyclically transmitted
- Transmission of alarm flags to a controller
- Full diagnosis capability by inquiry as to the cause of the fault in the diagnosis data record
- Remote parameterization is also possible, in addition to or instead of local parameterization

- Rapid parameterization of the same devices by duplication of the parameterization in the controller
- Parameter transmission by upload to a controller by IO-Link call or by parameter server (if IO-Link master from IO-Link Specification V 1.1 and higher is used)
- Consistent central data storage in the event of parameter change locally or via a controller
- Automatic reparameterizing when devices are exchanged
- Blocking of local parameterization via IO-Link possible
- Faults are saved in parameterizable and non-volatile fashion to prevent an automatic start up after voltage failure and to make sure diagnostics data is not lost
- By integration into the automation level the option exists of parameterizing the monitoring relay at any time via a display unit or displaying the measured values in a control room or locally at the machine/control cabinet

Even without communication via IO-Link the devices continue to function fully autonomously:

- Parameterization can take place locally at the device, independently of a controller
- In the event of failure or before the controller becomes available the monitoring relays work as long as the control supply voltage (24 V DC) is present
- If the monitoring relays are operated without the controller, the 3RR24 monitoring relays for IO-Link have, thanks to the integrated SIO mode, an additional semiconductor output, which switches when the adjustable warning threshold is exceeded

Thanks to the combination of autonomous monitoring relay function and integrated IO-Link communication, redundant sensors and/or analog signal converters – which previously took over the transmission of measured values to a controller, leading to considerable extra cost and wiring outlay – are no longer needed.

Because the output relays are still present, the monitoring relays increase the functional reliability of the system, since only the controller can fulfill the control tasks if the current measured values are available, whereas the output relays can also be used for the disconnection of the system if limit values that cannot be reached during operation are exceeded.

For further information on the IO-Link communication system, see [Chapter 14](#).

**Benefits**

- Can be mounted directly on 3RT2 contactors and 3RA23 reversing contactor assemblies, in other words, there is no need for additional wiring in the main circuit
- Optimally coordinated with the technical characteristics of the 3RT2 contactors
- No separate current transformer required
- Variably adjustable to overshoot, undershoot or range monitoring
- Freely configurable delay times and RESET response
- Display of ACTUAL value and status messages
- All versions with removable control current terminals
- All versions with screw or spring-type terminals
- Simple determination of the threshold values through direct reference to actually measured values for setpoint loading
- Range monitoring and selectable active current measurement mean that only one device for monitoring a motor is required along the entire torque curve
- In addition to current monitoring it is also possible to monitor for current unbalance, broken cables, phase failure, phase sequence, residual current and motor blocking
- Integrated counter for operating cycles and operating hours to support requirements-based maintenance of the monitored machine or application
- Simple cyclical transmission of the current measured values, relay switching states and events to a controller
- Remote parameterization
- Automatic reparameterizing when devices are exchanged
- Simple duplication of identical or similar parameterizations
- Reduction of control current wiring
- Elimination of testing costs and wiring errors
- Reduction of configuration work
- Integration in TIA means clear diagnostics if a fault occurs
- Cost saving and space saving in control cabinet due to the elimination of AI and IO modules as well as analog signal converters and duplicated sensors

Application

- Monitoring of current overshoot and undershoot
- Monitoring of broken conductors
- Monitoring of no-load operation and load shedding, e.g. in the event of a torn V-belt or no-load operation of a pump
- Monitoring of overload, e.g. on pumps due to a dirty filter system
- Monitoring the functionality of electrical loads such as heaters
- Monitoring of wrong phase sequence on mobile equipment such as compressors or cranes
- Monitoring of high-impedance faults to ground, e.g. caused by damaged insulation or moisture

The use of SIRIUS monitoring relays for IO-Link is particularly recommended for machines and plant in which these relays, in addition to their monitoring function, are to be connected to the automation level for the rapid, simple and fault-free provision of the current measured values and/or for remote parameterization.

The monitoring relays can either relieve the controller of monitoring tasks or, as a second monitoring entity in parallel to and independent of the controller, increase the reliability in the process or in the system. In addition, the elimination of AI and IO modules allows the width of the controller to be reduced despite significantly expanded functionality.



Contactors and Contactor Assemblies

Contactor Assemblies for Switching Motors


Current Monitoring Relays with IO-Link

Technical specifications


Function charts of 3RR24 for IO-Link, digitally adjustable

With the closed-circuit principle selected upon application of the control supply voltage


Current overshoot

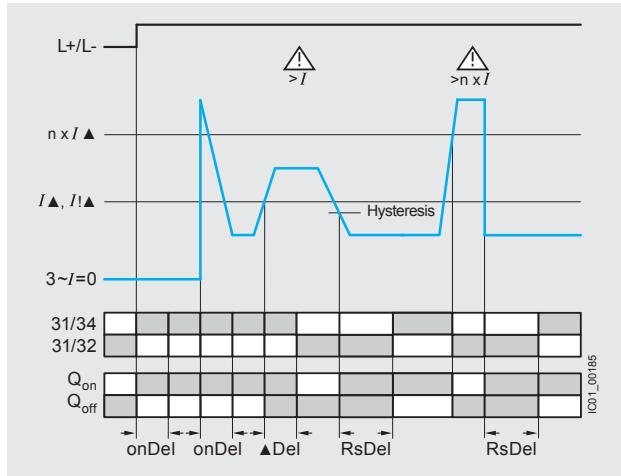


Range monitoring

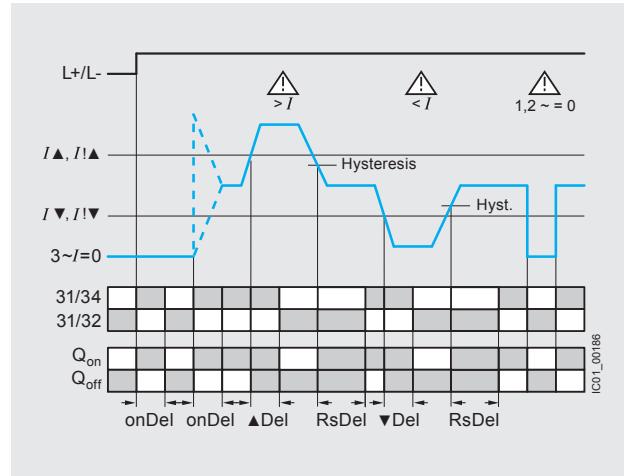


Current undershoot with residual current monitoring

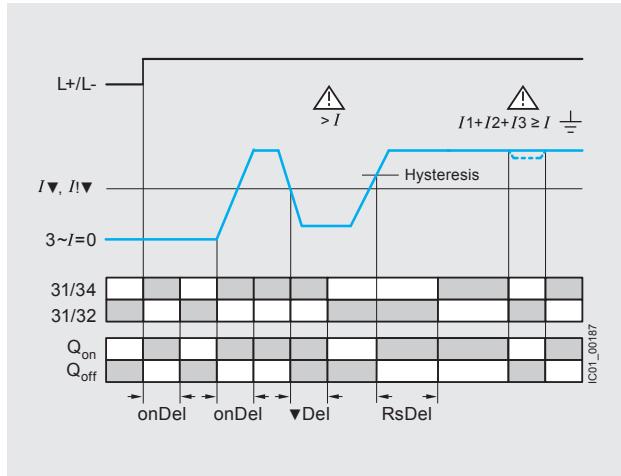

Phase sequence monitoring

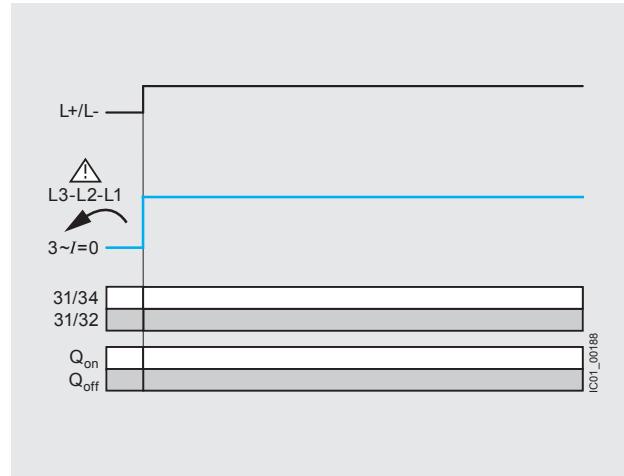


Circuit diagrams

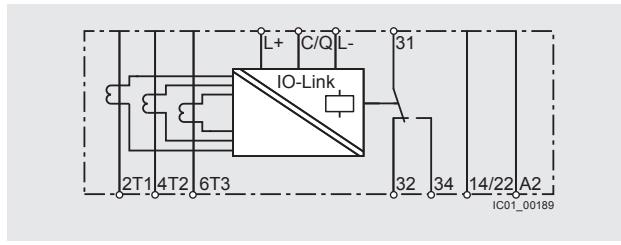

3RR2441-1AA40

Note:

It is not necessary to protect the measuring circuit for device protection. The protective device for line protection depends on the cross-section used.

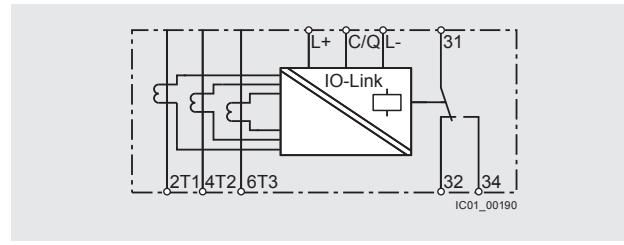

3RR2441-2AA40, 3RR2442-AA40, 3RR2443-AA40



Contactor Assemblies for Switching Motors

Current Monitoring Relays

2

CONTACTORS AND ASSEMBLIES



3RR2441-1AA40



3RR2442-1AA40



3RR2441-2AA40



3RR2442-2AA40



3RR2443-1AA40



3RR2443-3AA40


Size	Measuring range	Hysteresis	Control supply voltage U_s	Screw terminals		Spring-type terminals	
				A	A	V	Order No.
S00	1.6 ... 16	0.1 ... 3	24 DC			3RR2441-1AA40	3RR2441-2AA40
S0	4 ... 40	0.1 ... 8	24 DC			3RR2442-1AA40	3RR2442-2AA40
S2	8 ... 80	0.2 ... 16	24 DC			3RR2443-1AA40	3RR2443-3AA40



Contactor Assemblies for Switching Motors

Current Monitoring Relay Accessories

Accessories

Use	Version	Size	Order No.	Standard Pack Quantity
Terminal supports for stand-alone installation¹⁾				
	For 3RR21, 3RR22, 3RR24	For separate mounting of the overload relays or monitoring relays; screw and snap-on mounting onto TH 35 standard mounting rail according to IEC 60715	Screw terminals 	3RU2916-3AA01 3RU2926-3AA01 3RU2936-3AA01 1 unit 1 unit 1 unit
		• Screw connection S00 S0 S2	Spring-type terminals 	3RU2916-3AC01 3RU2926-3AC01 1 unit 1 unit
Blank labels				
	For 3RR21, 3RR22, 3RR24	Unit labeling plates²⁾ For SIRIUS devices 20 mm x 7 mm, titanium gray	3RT2900-1SB20	340 units
Sealable covers				
	For 3RR21, 3RR22, 3RR24	Sealable covers For securing against unintentional or unauthorized adjustment of settings	3RR2940	5 units
3RR2940	For 3RR21	Sealing foil For securing against unauthorized adjustment of setting knobs	3TK2820-0AA00	1 unit
Tools for opening spring-type terminals				
	For auxiliary circuit connections	Screwdrivers For all SIRIUS devices with spring-type terminals; 3.0 mm x 0.5 mm; length approx. 200 mm, titanium gray/black, partially insulated	Spring-type terminals  3RA2908-1A	1 unit

¹⁾ The accessories are identical to those of the 3RU21 thermal overload relays and the 3RB3 electronic overload relays, see [Chapter 3 "Overload Relays"](#).

²⁾ PC labeling system for individual inscription of unit labeling plates available from:
Systems, Inc.
www.murplastic.com



Contactors and Contactor Assemblies

Contactor Assemblies for Switching Motors

NEMA 1 Enclosure

2

CONTACTORS AND
ASSEMBLIES

Selection and ordering data

- * NEMA Type 1 Enclosures
- * Lift off cover
- * Accepts SIRIUS power control components
 - * Non-reversing contactors
 - * Reversing contactors
 - * Starters with thermal overload relays
 - * Starters with solid-state overload relays

Application

The 49EC14*B separate enclosures are designed for field assembly of a wide range of Siemens SIRIUS open style control components and field modification kits as listed in the charts below. Note that certain components require the addition of a DIN Rail kit for proper mounting in the enclosure.



NEMA 1 Enclosures

Max. current	Contactor		Max. current	Overload relay		Required DIN rail kit	NEMA 1 Enclosure Order No.
A	Non-reversing	Reversing	A	Thermal	Solid-state	Order No.	
16	3RT201	3RA231	16	3RU2116	3RB3016	MTR5	49EC14EB110705R
38	3RT202	3RA232	40	3RU2126	3RB3026	MTR5	
50	3RT203		50	3RU2136	3RB3036	—	49EC14GB140807R
12		3RA231	12	3RU2116	3RB3016	MTR5	
25		3RA232	25	3RU2126	3RB3036	MTR5	
50		3RA233	50	3RU2136	3RB3036	—	
95	3RT204		100	3RU2146	3RB3046	—	49EC14IB201208R
95		3RA234	100	3RU2146	3RB3046	—	



Accessories for NEMA 1 Enclosures

Accessory type	Description	Legends	Voltage	Order No.
Push buttons	Momentary	Start - Stop	none	49SDPB5
	Monentary	Reset (blue)		49MBRS
Selector Switch	2 position	Off - On	none	49SDSB4
	3 position	Hand - Off - Auto	none	49SDSB1
		For - Off - Rev		49SDSB2
		High - Off - Low		49SDSB3
Pilot light	Light module and lens color: RED, GREEN, and AMBER"	ON, RUN, OFF, OL TRIPPED	24 to 240 AC DC 277V AC	49SDLBU 49SDLBL
	Light module and lens color: RED, RED	REV - FOR or HIGH - LOW	24 to 240 AC DC 277V AC	49SDLB7RU 49SDLB7RL
	Light module and lens color: GREEN, GREEN	REV - FOR or HIGH - LOW	24 to 240 AC DC 277V AC	49SDLB7GU 49SDLB7GL

For 3RT contactors, see page 2/8.

For 3RA reversing, see pages 2/43.

For thermal overloads, see page 3/10.

For solidstate overloads, see pages 3/22.

For enclosure dimensions, see figures 1, 2, and 3 on page 9/150.



3RT Contactors

Spare parts for 3RT2 contactors



3RT29 24-5A.01

For contactors		Rated control supply voltage U_s			Order No.	Weight approx. kg
Size	Type	50 Hz V	50/60 Hz V	60 Hz V		
Solenoid coils · AC operation						
S0	3RT20 23,	24	--	--	3RT29 24-5AB01	0.100
	3RT20 24,	42	--	--	3RT29 24-5AD01	0.100
	3RT20 25	48	--	--	3RT29 24-5AH01	0.100
		110	--	--	3RT29 24-5AF01	0.100
		230	--	--	3RT29 24-5AP01	0.100
		400	--	--	3RT29 24-5AV01	0.100
		--	24	--	3RT29 24-5AC21	0.100
			42	--	3RT29 24-5AD21	0.100
		--	48	--	3RT29 24-5AH21	0.100
			110	--	3RT29 24-5AG21	0.100
		--	220	--	3RT29 24-5AN21	0.100
			230	--	3RT29 24-5AL21	0.100
		110	--	120	3RT29 24-5AK61	0.100
		220	--	240	3RT29 24-5AP61	0.100
		--	100	110	3RT29 24-5AG61	0.100
			200	220	3RT29 24-5AN61	0.100
		--	400	440	3RT29 24-5AR61	0.100
S0	3RT20 26,	24	--	--	3RT29 26-5AB01	0.100
	3RT20 27,	42	--	--	3RT29 26-5AD01	0.100
	3RT20 28	48	--	--	3RT29 26-5AH01	0.100
	3RT23 25,	110	--	--	3RT29 26-5AF01	0.100
	3RT23 26,	230	--	--	3RT29 26-5AP01	0.100
	3RT23 27	400	--	--	3RT29 26-5AV01	0.100
	3RT25 26	--	24	--	3RT29 26-5AC21	0.100
		--	42	--	3RT29 26-5AD21	0.100
		--	48	--	3RT29 26-5AH21	0.100
		--	110	--	3RT29 26-5AG21	0.100
		--	208	--	3RT29 26-5AM21	0.100
		--	220	--	3RT29 26-5AN21	0.100
		--	230	--	3RT29 26-5AL21	0.100
		110	--	120	3RT29 26-5AK61	0.100
		220	--	240	3RT29 26-5AP61	0.100
		--	100	110	3RT29 26-5AG61	0.100
		--	200	220	3RT29 26-5AN61	0.100
		--	400	440	3RT29 26-5AR61	0.100
		500	--		3RT29 26-5AQ21	0.100
			277		3RT29 26-5AU61	0.100
			480		3RT29 26-5AV61	0.100
			600		3RT29 26-5AT61	0.100

Note:

Contactors with AC and AC/DC coils have different depths. It is only possible to replace the coils on AC contactors with AC coils, and on AC/DC contactors with AC/DC coils. It is not possible to replace the coils on DC contactors in the S0 frame.



Contactor Assemblies for Switching Motors

Spare parts for 3RT2 contactors

Screw terminals and spring-type terminals



3RT2934-5A.01



3RT2934-5N.31

2

CONTACTORS AND
ASSEMBLIES

For contactors	Rated control supply voltage U_s			SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Type	50 Hz	50/60 Hz	60 Hz	DC	d				
Solenoid coils · AC operation									
Size S2									
3RT203. -.A,	24	--	--	--	5	3RT2934-5AB01	1	1 unit	41B
3RT233. -.A,	42	--	--	--	5	3RT2934-5AD01	1	1 unit	41B
3RT253. -.A	48	--	--	--	5	3RT2934-5AH01	1	1 unit	41B
	110	--	--	--	5	3RT2934-5AF01	1	1 unit	41B
	230	--	--	--	5	3RT2934-5AP01	1	1 unit	41B
	400	--	--	--	5	3RT2934-5AV01	1	1 unit	41B
	--	24	--	--	5	3RT2934-5AC21	1	1 unit	41B
	--	42	--	--	5	3RT2934-5AD21	1	1 unit	41B
	--	48	--	--	5	3RT2934-5AH21	1	1 unit	41B
	--	110	--	--	5	3RT2934-5AG21	1	1 unit	41B
	--	220	--	--	5	3RT2934-5AN21	1	1 unit	41B
	--	230	--	--	5	3RT2934-5AL21	1	1 unit	41B
	110	--	120	--	5	3RT2934-5AK61	1	1 unit	41B
	220	--	240	--	5	3RT2934-5AP61	1	1 unit	41B
	--	--	480	--	5	3RT2934-5AV61	1	1 unit	41B
	--	--	600	--	5	3RT2934-5AT61	1	1 unit	41B
	--	100	110	--	5	3RT2934-5AG61	1	1 unit	41B
	--	200	220	--	5	3RT2934-5AN61	1	1 unit	41B
	--	400	440	--	5	3RT2934-5AR61	1	1 unit	41B
Size S3 NEW									
3RT2.4. -.A	24	--	--	--	X	3RT2944-5AB01	1	1 unit	41B
	42	--	--	--	X	3RT2944-5AD01	1	1 unit	41B
	48	--	--	--	X	3RT2944-5AH01	1	1 unit	41B
	110	--	--	--	X	3RT2944-5AF01	1	1 unit	41B
	230	--	--	--	X	3RT2944-5AP01	1	1 unit	41B
	400	--	--	--	X	3RT2944-5AV01	1	1 unit	41B
	--	24	--	--	X	3RT2944-5AC21	1	1 unit	41B
	--	42	--	--	X	3RT2944-5AD21	1	1 unit	41B
	--	48	--	--	X	3RT2944-5AH21	1	1 unit	41B
	--	110	--	--	X	3RT2944-5AG21	1	1 unit	41B
	--	220	--	--	X	3RT2944-5AN21	1	1 unit	41B
	--	230	--	--	X	3RT2944-5AL21	1	1 unit	41B
	110	--	120	--	X	3RT2944-5AK61	1	1 unit	41B
	220	--	240	--	X	3RT2944-5AP61	1	1 unit	41B
	--	--	480	--	X	3RT2944-5AV61	1	1 unit	41B
	--	--	600	--	X	3RT2944-5AT61	1	1 unit	41B
	--	100	110	--	X	3RT2944-5AG61	1	1 unit	41B
	--	200	220	--	X	3RT2944-5AN61	1	1 unit	41B
	--	400	440	--	X	3RT2944-5AR61	1	1 unit	41B
Solenoid coils · AC/DC operation, with varistor									
Size S2									
3RT203. -.A,	--	20 ... 33	--	20 ... 33	5	3RT2934-5NB31	1	1 unit	41B
3RT233. -.A,	--	30 ... 42	--	30 ... 42	5	3RT2934-5ND31	1	1 unit	41B
3RT253. -.A	--	48 ... 80	--	48 ... 80	5	3RT2934-5NE31	1	1 unit	41B
	--	83 ... 155	--	83 ... 155	5	3RT2934-5NF31	1	1 unit	41B
	--	175 ... 280	--	175 ... 280	5	3RT2934-5NP31	1	1 unit	41B
Size S3 NEW									
3RT2.4. -.A	--	20 ... 33	--	20 ... 33	X	3RT2944-5NB31	1	1 unit	41B
	--	30 ... 42	--	30 ... 42	X	3RT2944-5ND31	1	1 unit	41B
	--	48 ... 80	--	48 ... 80	X	3RT2944-5NE31	1	1 unit	41B
	--	83 ... 155	--	83 ... 155	X	3RT2944-5NF31	1	1 unit	41B
	--	175 ... 280	--	175 ... 280	X	3RT2944-5NP31	1	1 unit	41B

Note:

It is only possible to replace the coils on AC contactors with AC coils, and on AC/DC contactors with AC/DC coils.



3RT Contactors

Spare parts for 3RT1 contactors

Selection and ordering data

For contactor	Rated control supply voltage U_s	Screw connection		Spring-type connection	Weight approx.		
		Order No.	Order No.				
Size	Type						
Coils - AC operation							
3RT19 24-5A.01	S0	3RT10 2., 24 V, 50 Hz 3RT13 2., 42 V, 50 Hz 3RT15 2., 48 V, 50 Hz 110 V, 50 Hz 230 V, 50 Hz 400 V, 50 Hz 24 V, 50/60 Hz 42 V, 50/60 Hz 48 V, 50/60 Hz 110 V, 50/60 Hz 208 V, 50/60 Hz 220 V, 50/60 Hz 230 V, 50/60 Hz 110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz	3RT19 24-5AB01 3RT19 24-5AD01 3RT19 24-5AH01 3RT19 24-5AF01 3RT19 24-5AP01 3RT19 24-5AV01 3RT19 24-5AC21 3RT19 24-5AD21 3RT19 24-5AH21 3RT19 24-5AG21 3RT19 24-5AM21 3RT19 24-5AN21 3RT19 24-5AL21 3RT19 24-5AK61 3RT19 24-5AP61 3RT19 24-5AU61 3RT19 24-5AV61 3RT19 24-5AT61 3RT19 24-5AG61 3RT19 24-5AN61 3RT19 24-5AR61	3RT19 24-5AB02 3RT19 24-5AD02 3RT19 24-5AH02 3RT19 24-5AF02 3RT19 24-5AP02 3RT19 24-5AV02 3RT19 24-5AC22 3RT19 24-5AD22 3RT19 24-5AH22 3RT19 24-5AG22 3RT19 24-5AM22 3RT19 24-5AN22 3RT19 24-5AL22 3RT19 24-5AK62 3RT19 24-5AP62 3RT19 24-5AU62 3RT19 24-5AV62 3RT19 24-5AT62 3RT19 24-5AG62 3RT19 24-5AN62 3RT19 24-5AR62	0.069		
3RT19 24-5A.02	S2	3RT10 33 3RT10 34	24 V, 50 Hz 42 V, 50 Hz 48 V, 50 Hz 110 V, 50 Hz 230 V, 50 Hz 400 V, 50 Hz 42 V, 50/60 Hz 48 V, 50/60 Hz 24 V, 50/60 Hz 110 V, 50/60 Hz 208 V, 50/60 Hz 220 V, 50/60 Hz 230 V, 50/60 Hz 110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz	3RT19 34-5AB01 3RT19 34-5AD01 3RT19 34-5AH01 3RT19 34-5AF01 3RT19 34-5AP01 3RT19 34-5AV01 3RT19 34-5AD21 3RT19 34-5AH21 3RT19 34-5AC21 3RT19 34-5AG21 3RT19 34-5AM21 3RT19 34-5AN21 3RT19 34-5AL21 3RT19 34-5AK61 3RT19 34-5AP61 3RT19 34-5AU61 3RT19 34-5AV61 3RT19 34-5AT61 3RT19 34-5AG61 3RT19 34-5AN61 3RT19 34-5AR61	3RT19 34-5AB02 3RT19 34-5AD02 3RT19 34-5AH02 3RT19 34-5AF02 3RT19 34-5AP02 3RT19 34-5AV02 3RT19 34-5AD22 3RT19 34-5AH22 3RT19 34-5AC22 3RT19 34-5AG22 3RT19 34-5AM22 3RT19 34-5AN22 3RT19 34-5AL22 3RT19 34-5AK62 3RT19 34-5AP62 3RT19 34-5AU62 3RT19 34-5AV62 3RT19 34-5AT62 3RT19 34-5AG62 3RT19 34-5AN62 3RT19 34-5AR62	0.088	
3RT19 34-5A.01		3RT10 35, 3RT10 36, 3RT13 3., 3RT15 3.	24 V, 50 Hz 42 V, 50 Hz 48 V, 50 Hz 110 V, 50 Hz 230 V, 50 Hz 400 V, 50 Hz 24 V, 50/60 Hz 42 V, 50/60 Hz 48 V, 50/60 Hz 110 V, 50/60 Hz 208 V, 50/60 Hz 220 V, 50/60 Hz 230 V, 50/60 Hz 110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz	3RT19 35-5AB01 3RT19 35-5AD01 3RT19 35-5AH01 3RT19 35-5AF01 3RT19 35-5AP01 3RT19 35-5AV01 3RT19 35-5AC21 3RT19 35-5AD21 3RT19 35-5AH21 3RT19 35-5AG21 3RT19 35-5AM21 3RT19 35-5AN21 3RT19 35-5AL21 3RT19 35-5AK61 3RT19 35-5AP61 3RT19 35-5AU61 3RT19 35-5AV61 3RT19 35-5AT61 3RT19 35-5AG61 3RT19 35-5AN61 3RT19 35-5AR61	3RT19 35-5AB02 3RT19 35-5AD02 3RT19 35-5AH02 3RT19 35-5AF02 3RT19 35-5AP02 3RT19 35-5AV02 3RT19 35-5AC22 3RT19 35-5AD22 3RT19 35-5AH22 3RT19 35-5AG22 3RT19 35-5AM22 3RT19 35-5AN22 3RT19 35-5AL22 3RT19 35-5AK62 3RT19 35-5AP62 3RT19 35-5AU62 3RT19 35-5AV62 3RT19 35-5AT62 3RT19 35-5AG62 3RT19 35-5AN62 3RT19 35-5AR62	0.088	



3RT Contactors

Spare parts for 3RT1 contactors

2

Selection and ordering data

For contactor	Rated control supply voltage U_s	Screw connection		Spring-type connection	Weight approx. kg	
		Order No.	Order No.			
Size	Type	Coils - AC operation				
3RT19 44-5A .01	S3	3RT10 44	24 V, 50 Hz 42 V, 50 Hz 48 V, 50 Hz 110 V, 50 Hz 230 V, 50 Hz 400 V, 50 Hz 24 V, 50/60 Hz 42 V, 50/60 Hz 48 V, 50/60 Hz 110 V, 50/60 Hz 208 V, 50/60 Hz 220 V, 50/60 Hz 230 V, 50/60 Hz 110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz	3RT19 44-5AB01 3RT19 44-5AD01 3RT19 44-5AH01 3RT19 44-5AF01 3RT19 44-5AP01 3RT19 44-5AV01 3RT19 44-5AC21 3RT19 44-5AD21 3RT19 44-5AH21 3RT19 44-5AG21 3RT19 44-5AM21 3RT19 44-5AN21 3RT19 44-5AL21 3RT19 44-5AK61 3RT19 44-5AP61 3RT19 44-5AU61 3RT19 44-5AV61 3RT19 44-5AT61 3RT19 44-5AG62 3RT19 44-5AN62 3RT19 44-5AR62	3RT19 44-5AB02 3RT19 44-5AD02 3RT19 44-5AH02 3RT19 44-5AF02 3RT19 44-5AP02 3RT19 44-5AV02 3RT19 44-5AC22 3RT19 44-5AD22 3RT19 44-5AH22 3RT19 44-5AG22 3RT19 44-5AM22 3RT19 44-5AN22 3RT19 44-5AL22 3RT19 44-5AK62 3RT19 44-5AP62 3RT19 44-5AU62 3RT19 44-5AV62 3RT19 44-5AT62 3RT19 44-5AG62 3RT19 44-5AN62 3RT19 44-5AR62	0.130
3RT19 45-5A .01		3RT10 45	24 V, 50 Hz 42 V, 50 Hz 48 V, 50 Hz 110 V, 50 Hz 230 V, 50 Hz 400 V, 50 Hz 24 V, 50/60 Hz 42 V, 50/60 Hz 48 V, 50/60 Hz 110 V, 50/60 Hz 208 V, 50/60 Hz 220 V, 50/60 Hz 230 V, 50/60 Hz 110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz	3RT19 45-5AB01 3RT19 45-5AD01 3RT19 45-5AH01 3RT19 45-5AF01 3RT19 45-5AP01 3RT19 45-5AV01 3RT19 45-5AC21 3RT19 45-5AD21 3RT19 45-5AH21 3RT19 45-5AG21 3RT19 45-5AM21 3RT19 45-5AN21 3RT19 45-5AL21 3RT19 45-5AK61 3RT19 45-5AP61 3RT19 45-5AU61 3RT19 45-5AV61 3RT19 45-5AT61 3RT19 45-5AG62 3RT19 45-5AN62 3RT19 45-5AR62	3RT19 45-5AB02 3RT19 45-5AD02 3RT19 45-5AH02 3RT19 45-5AF02 3RT19 45-5AP02 3RT19 45-5AV02 3RT19 45-5AC22 3RT19 45-5AD22 3RT19 45-5AH22 3RT19 45-5AG22 3RT19 45-5AM22 3RT19 45-5AN22 3RT19 45-5AL22 3RT19 45-5AK62 3RT19 45-5AP62 3RT19 45-5AU62 3RT19 45-5AV62 3RT19 45-5AT62 3RT19 45-5AG62 3RT19 45-5AN62 3RT19 45-5AR62	0.130
3RT19 45-5AP02		3RT10 45	110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz	3RT19 45-5AK61 3RT19 45-5AP61 3RT19 45-5AU61 3RT19 45-5AV61 3RT19 45-5AT61 3RT19 45-5AG62 3RT19 45-5AN62 3RT19 45-5AR62	3RT19 45-5AK62 3RT19 45-5AP62 3RT19 45-5AU62 3RT19 45-5AV62 3RT19 45-5AT62 3RT19 45-5AG62 3RT19 45-5AN62 3RT19 45-5AR62	
Coils - DC operation						
3RT19 44-5BM42	S2	3RT10 3..	24 V 3RT13 3.. 3RT15 3.. 60 V 110 V 125 V 220 V 230 V	3RT19 34-5BB41 3RT19 34-5BD41 3RT19 34-5BW41 3RT19 34-5BE41 3RT19 34-5BF41 3RT19 34-5BG41 3RT19 34-5BM41 3RT19 34-5BP41	3RT19 34-5BB42 3RT19 34-5BD42 3RT19 34-5BW42 3RT19 34-5BE42 3RT19 34-5BF42 3RT19 34-5BG42 3RT19 34-5BM42 3RT19 34-5BP42	0.558
	S3	3RT10 4..	24 V 3RT13 4.. 3RT14 4.. 60 V 110 V 125 V 220 V 230 V	3RT19 44-5BB41 3RT19 44-5BD41 3RT19 44-5BW41 3RT19 44-5BE41 3RT19 44-5BF41 3RT19 44-5BG41 3RT19 44-5BM41 3RT19 44-5BP41	3RT19 44-5BB42 3RT19 44-5BD42 3RT19 44-5BW42 3RT19 44-5BE42 3RT19 44-5BF42 3RT19 44-5BG42 3RT19 44-5BM42 3RT19 44-5BP42	0.916



3RT Contactors

Spare parts for 3RT1 contactors

Selection and ordering data

For contactor	Rated control supply voltage $U_{s\min}$ to $U_{s\max}$		Order No.	Weight approx. kg
Size	Type	AC/DC V		
Withdrawable coils				
Conventional operating mechanism				
3RT19 55-5A...	S6	3RT10 5, 3RT14 5	23 ... 26 42 ... 48 110 ... 127 200 ... 220 220 ... 240 240 ... 277 380 ... 420 440 ... 480 500 ... 550 575 ... 600	3RT19 55-5AB31 3RT19 55-5AD31 3RT19 55-5AF31 3RT19 55-5AM31 3RT19 55-5AP31 3RT19 55-5AU31 3RT19 55-5AV31 3RT19 55-5AR31 3RT19 55-5AS31 3RT19 55-5AT31
				0.49
3RT19 65-5A...	S10	3RT10 6, 3RT14 6	23 ... 26 42 ... 48 110 ... 127 200 ... 220 220 ... 240 240 ... 277 380 ... 420 440 ... 480 500 ... 550 575 ... 600	3RT19 65-5AB31 3RT19 65-5AD31 3RT19 65-5AF31 3RT19 65-5AM31 3RT19 65-5AP31 3RT19 65-5AU31 3RT19 65-5AV31 3RT19 65-5AR31 3RT19 65-5AS31 3RT19 65-5AT31
				0.65
3RT19 66-5A...		3RT12 6 Vacuum contactor	23 ... 26 42 ... 48 110 ... 127 200 ... 220 220 ... 240 240 ... 277 380 ... 420 440 ... 480 500 ... 550 575 ... 600	3RT19 66-5AB31 3RT19 66-5AD31 3RT19 66-5AF31 3RT19 66-5AM31 3RT19 66-5AP31 3RT19 66-5AU31 3RT19 66-5AV31 3RT19 66-5AR31 3RT19 66-5AS31 3RT19 66-5AT31
	S12	3RT10 7, 3RT14 7, 3RT12 7 Vacuum contactor	23 ... 26 42 ... 48 110 ... 127 200 ... 220 220 ... 240 240 ... 277 380 ... 420 440 ... 480 500 ... 550 575 ... 600	3RT19 75-5AB31 3RT19 75-5AD31 3RT19 75-5AF31 3RT19 75-5AM31 3RT19 75-5AP31 3RT19 75-5AU31 3RT19 75-5AV31 3RT19 75-5AR31 3RT19 75-5AS31 3RT19 75-5AT31
				1.1
Withdrawable coils				
Solid-state operating mechanism · for DC 24 V PLC output				
3RT19 55-5N...	S6	3RT10 5, 3RT14 5	21 ... 27.3 96 ... 127 200 ... 277	3RT19 55-5NB31 3RT19 55-5NF31 3RT19 55-5NP31
				0.49
3RT19 65-5N...	S10	3RT10 6, 3RT14 6	21 ... 27.3 96 ... 127 200 ... 277	3RT19 65-5NB31 3RT19 65-5NF31 3RT19 65-5NP31
				0.65
3RT19 66-5N...		3RT12 6 Vacuum contactor	21 ... 27.3 96 ... 127 200 ... 277	3RT19 66-5NB31 3RT19 66-5NF31 3RT19 66-5NP31
	S12	3RT10 7, 3RT14 7, 3RT12 7 Vacuum contactor	21 ... 27.3 96 ... 127 200 ... 277	3RT19 75-5NB31 3RT19 75-5NF31 3RT19 75-5NP31
				1.1
Solid-state operating mechanism · for DC 24 V PLC output/PLC relay output, with remaining lifetime indication (withdrawable coil with lateral electronics module)				
3RT19 55-5PF31	S6	3RT10 5, 3RT14 5	96 ... 127 200 ... 277	3RT19 55-5PF31 3RT19 55-5PP31
	S10	3RT10 6, 3RT14 6	96 ... 127 200 ... 277	3RT19 65-5PF31 3RT19 65-5PP31
	S12	3RT10 7, 3RT14 7	96 ... 127 200 ... 277	3RT19 75-5PF31 3RT19 75-5PP31
				1.1



3RT Contactors

Spare parts for 3RT1 contactors

2

CONTACTORS AND ASSEMBLIES

Selection and ordering data

For contactor	Design	Order No.	Weight approx.	Pack.
Size	Type		kg	
Arc chutes				
S2 3RT20 3 .. 3RT20 3 ..	For AC coil contactors only For UC (AC/DC) coil contactors only	3RT29 36-7A 3RT29 36-7B	1 unit	
S3 3RT10 4 .. 3RT14 46		3RT19 46-7A		
S6 3RT10 54 .. 3RT10 55 .. 3RT10 56 ..		3RT19 54-7A 3RT19 55-7A 3RT19 56-7A	0.72	
S10 3RT10 64 .. 3RT10 65 .. 3RT10 66 ..		3RT19 64-7A 3RT19 65-7A 3RT19 66-7A	1.24	
S12 3RT10 75 .. 3RT10 76 ..		3RT19 75-7A 3RT19 76-7A	1.4	
S6 3RT14 56 ..		3RT19 56-7B	0.72	
S10 3RT14 66 ..		3RT19 66-7B	1.24	
S12 3RT14 76 ..		3RT19 76-7B	1.4	
Contacts with fixing parts				
• for contactors with 3 main contacts				
S2 3RT20 35 .. 3RT20 36 .. 3RT20 37 .. 3RT20 38 ..	Main contacts (3 NO) for AC-3 utilization category (1 set = 3 moving and 6 fixed contacts with fixing parts)	3RT29 35-6A 3RT29 36-6A 3RT29 37-6A 3RT29 38-6A	1 set	
S3 3RT10 44 .. 3RT10 45 .. 3RT10 46 ..		3RT19 44-6A 3RT19 45-6A 3RT19 46-6A		
S6 3RT10 54 .. 3RT10 55 .. 3RT10 56 ..		3RT19 54-6A 3RT19 55-6A 3RT19 56-6A	0.28	
S10 3RT10 64 .. 3RT10 65 .. 3RT10 66 ..		3RT19 64-6A 3RT19 65-6A 3RT19 66-6A	0.48	
S12 3RT10 75 .. 3RT10 76 ..		3RT19 75-6A 3RT19 76-6A	0.9	
S3 3RT14 46 ..	Main contacts (3 NO) for AC-1 utilization category (1 set = 3 moving and 6 fixed contacts with fixing parts)	3RT19 46-6D		
S6 3RT14 56 ..		3RT19 56-6D	0.28	
S10 3RT14 66 ..		3RT19 66-6D	0.48	
S12 3RT14 76 ..		3RT19 76-6D	0.9	
• for 3RT12 vacuum contactors				
S10 3RT12 64 .. 3RT12 65 .. 3RT12 66 ..	3 vacuum interrupters with fixing parts	3RT19 64-6V 3RT19 65-6V 3RT19 66-6V	1.4	1 set
S12 3RT12 75 .. 3RT12 76 ..		3RT19 75-6V 3RT19 76-6V	1.5	
• for contactors with 4 main contacts				
S2 3RT23 36 .. 3RT23 37 ..	Main contacts (4 NO contacts) for utilization category AC-1	3RT29 36-6E 3RT29 37-6E	1 set	
S3 3RT13 44 .. 3RT13 46 ..	(1 set = 4 moving and 8 fixed contacts with fixing parts)	3RT19 44-6E 3RT19 46-6E		



Selection and ordering data

Coil type	3TY6 503-0A..	3TB50	3TY7 683-0C..	3TF68	
Rated control supply voltage U_s	Control supply voltage at	3TY6 523-0A..	3TB52	3TY7 693-0C..	3TF69
		3TY6 543-0A..	3TB54		
		3TY6 566-0A..	3TB56		

Rated control supply voltages (changes to 10th and 11th positions of the Order No.)

AC operation

Coils for 50 Hz					
50 Hz	60 Hz				
AC 24 V	AC 39 V	B0	–		
AC 32 V	AC 28 V	–	–		
AC 36 V	AC 42 V	G0	–		
AC 42 V	AC 50 V	D0	–		
AC 48 V	AC 58 V	H0	–		
AC 60 V	AC 72 V	E0	–		
AC 110 V	AC 132 V	F0	–		
AC 125/127 V	AC 150/152 V	L0	–		
AC 230/220 V	AC 277 V	P0 ¹⁾	–		
AC 240 V	AC 288 V	U0	–		
AC 400/380 V	AC 480/460 V	V0 ¹⁾	–		
AC 415 V	AC 500 V	R0	–		
AC 500 V	AC 600 V	S0	–		
Coils for 50/60 Hz					
AC 110 V ... 132 V	–		F7		
AC 200 V ... 240 V	–		M7		
AC 230 V ... 277 V	–		P7 ²⁾		
AC 380 V ... 460 V	–		Q7		
AC 500 V ... 600 V	–		S7		

Coil type	3TY6 503-0B..	3TB50	3TY7 683-0D..	3TF68	
Rated control supply voltage U_s	3TY6 523-0B..	3TB52	3TY7 693-0D..	3TF69	
	3TY6 543-0B..	3TB54			
	3TY6 563-0B..	3TB56			

Rated control supply voltages (changes to 10th and 11th positions of the Order No.)

DC operation

DC 24 V	B4	B4		
DC 30 V	C4	—		
DC 36 V	V4	—		
DC 42 V	D4	—		
DC 48 V	W4	—		
DC 60 V	E4	—		
DC 110 V	F4	F4		
DC 125 V	G4	G4		
DC 180 V	K4	—		
DC 220 V	M4	M4		
DC 230 V	P4	P4		

Due to the mature nature of some product series, supply cannot be guaranteed on all versions listed on this page.

- 1) Coil voltage tolerance at 220 V or 380 V:
0.85 to 1.15 x U_s ;
lower tolerance range limit acc. to
IEC 60 947.

2) Lower tolerance range limit at 220 V:
 $0.85 \times U_s$ acc. to IEC 60 947.



3TB World Series Contactors

Spare parts

2

CONTACTORS AND ASSEMBLIES

2

CONTACTORS AND ASSEMBLIES

Coils, AC¹

3TY6463-0AK6

Frame Size	Catalog No						
	24V AC	120V AC	208V AC	220/240V AC	277V AC	480V AC	600V AC
3TB40-44	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AM1	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0
3TB47-48	3TY6483-0AC1	3TY6483-0AK6	3TY6483-0AM1	3TY6483-0AP6	3TY6483-0AP0	3TY6483-0AV0	3TY6483-0AS0
3TB52	—	3TY6523-0AK6	3TY6523-0AM1	3TY6523-0AP6	3TY6523-0AP0	3TY6523-0AV0	—
3TB56	—	—	—	—	3TY6566-0AP0	3TY6566-0AV0	3TY6566-0AS0

Coils, DC



3TY6483-0BB4

Frame Size	Catalog No						
	12V DC	24V DC	42V DC	48V DC	110V DC	125V DC	240V DC
3TB40-43	3TY4803-0BA4	3TY4803-0BB4	3TY4803-0BD4	3TY4803-0BW4	3TY4803-0BF4	3TY4803-0BG4	3TY4803-0BQ4
3TB44	3TY6443-0BA4	3TY6443-0BB4	3TY6443-0BD4	3TY6443-0BW4	3TY6443-0BF4	3TY6443-0BG4	3TY6443-0BQ4
3TB46	—	—	3TY6463-0BD4	3TY6463-0BW4	3TY6463-0BF4	—	3TY6463-0BQ4
3TB47-48	—	3TY6483-0BB4	3TY6483-0BD4	3TY6483-0BW4	3TY6483-0BF4	3TY6483-0BG4	—
3TB50	—	3TY6503-0BB4	3TY6503-0BD4	3TY6503-0BW4	3TY6503-0BF4	3TY6503-0BG4	3TY6503-0BQ4
3TB52	—	3TY6523-0BB4	3TY6523-0BD4	—	3TY6523-0BF4	3TY6523-0BG4	—
3TB54	—	3TY6543-0BB4	3TY6543-0BD4	3TY6543-0BW4	3TY6543-0BF4	—	3TY6543-0BQ4
3TB56	—	3TY6563-0BB4	3TY6563-0BD4	—	3TY6563-0BF4	3TY6563-0BG4	3TY6563-0BQ4
3TB58	—	—	—	—	—	—	—

Main Contacts (Includes 3 Moving and 6 Fixed Contacts)²⁾

3TY6500-0A

Frame Size	Catalog No
3TB40-43	Not Replaceable
3TB44	3TY6440-0A
3TB46	3TY6460-0A
3TB47	3TY6470-0A
3TB48	3TY6480-0A
3TB50	3TY6500-0A
3TB52	3TY6520-0A
3TB54	3TY6540-0A
3TB56	3TY6560-0A
3TB58	3TY6580-0A

Select Complete Catalog Number From Above¹⁾

Old Number	New Number
3TY6465-0A††	3TY6463-0A††
3TY6485-0A††	3TY6483-0A††
3TY6505-0A††	3TY6503-0A††
3TY6525-0A††	3TY6523-0A††
3TY6545-0A††	3TY6543-0A††
3TY6565-0A††	3TY6566-0A††

Coil Voltages	
Old Number	New Number
A8	K6
B8	M1
C8	P6
D8	Q0
E8	S0
F8	C1
G8	P0

Due to the mature nature of some product series, supply cannot be guaranteed on all versions listed on this page.

1)Some old 3TB coil catalog numbers have been superceded. Cross to current catalog number from these tables.

2)Main contact kits for size 3TB47 and larger include springs. Smaller sizes do not.



Contactors and Contactor Assemblies

3TF World Series Contactors

Spare parts

Coils, AC Type 3TF and CRLtF



3TY7403-0AK6

Frame Size	Catalog No							
	24V AC, 60Hz	120V AC, 60Hz	208V AC, 60Hz	240V AC, 60Hz	277V AC, 60Hz	460V AC, 60Hz	600V AC, 60Hz	500V AC, 50Hz
3TF40-43	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AM1	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0	
3TF34-35, 3TF44-45	3TY7443-0AC2	3TY7443-0AK6	3TY7443-0AM1	3TY7443-0AP6	3TY7443-0AU1	3TY7443-0AV0	3TY7443-0AS0	
3TF46-47	3TY7463-0AC2	3TY7463-0AK6	3TY7463-0AM1	3TY7463-0AP6	3TY7463-0AU1	3TY7463-0AV0	3TY7463-0AS0	
3TF48-49	3TY7483-0AC2	3TY7483-0AK6	3TY7483-0AM1	3TY7483-0AP6	3TY7483-0AU1	3TY7483-0AV0	3TY7483-0AS0	
3TF50-51	3TY7503-0AC2	3TY7503-0AK6	3TY7503-0AM1	3TY7503-0AP6	3TY7503-0AU1	3TY7503-0AV0	3TY7503-0AS0	
3TF52-53	3TY7523-0AC2	3TY7523-0AK6	3TY7523-0AM1	3TY7523-0AP6	3TY7523-0AU1	3TY7523-0AV0	3TY7523-0AS0	
3TF54-55	3TY7543-0AC2	3TY7543-0AK6	3TY7543-0AM1	3TY7543-0AP6	3TY7543-0AU1	3TY7543-0AV0	3TY7543-0AS0	
3TF56	3TY7563-0AC2	3TY7563-0AK6	3TY7563-0AM1	3TY7563-0AP6	3TY7563-0AU1	3TY7563-0AV0	3TY7563-0AS0	
3TF57	—	3TY7573-0CF7	—	3TY7573-0CM7	—	3TY7573-0CQ7	—	
3TF68	—	3TY7683-0CF7	—	3TY7683-0CM7	—	3TY7683-0CQ7	3TY7683-0CS7	
3TF69	—	3TY7693-0CF7	—	3TY7693-0CM7	—	3TY7693-0CQ7	3TY7693-0CS7	

Coils, DC Type 3TF and CRLtF



3TY4803-0BB4

Frame Size	Catalog No						
	12V DC	24V DC	42V DC	48V DC	110V DC	125V DC	240V DC
DC Solenoid							
3TF30-33	3TY4803-0BA4	3TY4803-0BB4	3TY4803-0BD4	3TY4803-0BW4	3TY4803-0BF4	3TY4803-0BG4	3TY4803-0BQ4
3TF40-43	3TY7443-0BA4	3TY7443-0BB4	3TY7443-0BD4	3TY7443-0BW4	3TY7443-0BF4	3TY7443-0BG4	—
3TF34-35, 3TF44-45	3TY7443-0BA4	3TY7443-0BB4	3TY7443-0BD4	3TY7443-0BW4	3TY7443-0BF4	3TY7443-0BG4	—
3TF46-47	—	3TY7463-0BB4	3TY7463-0BD4	3TY7463-0BW4	—	3TY7463-0BG4	3TY7463-0BQ4
DC Economy Circuit (Replacement coils only. Does not include interlock or interposing relay.)							
3TF46-47	—	3TY7463-0DB4	3TY7463-0DD4	3TY7463-0DW4	3TY7463-0DF4	3TY7463-0DG4	3TY7463-0DQ4
3TF48-49	—	—	3TY7483-0DD4	3TY7483-0DW4	3TY7483-0DF4	3TY7483-0DG4	3TY7483-0DQ4
3TF50-51	—	3TY7503-0DB4	3TY7503-0DD4	3TY7503-0DW4	3TY7503-0DF4	3TY7503-0DG4	3TY7503-0DQ4
3TF52-53	—	3TY7523-0DB4	3TY7523-0DD4	3TY7523-0DW4	3TY7523-0DF4	3TY7523-0DG4	3TY7523-0DQ4
3TF54-55	—	—	3TY7543-0DD4	3TY7543-0DW4	3TY7543-0DF4	3TY7543-0DG4	3TY7543-0DQ4
3TF56	—	3TY7563-0DB4	3TY7563-0DD4	3TY7563-0DW4	—	3TY7563-0DG4	3TY7563-0DQ4
3TF57	—	3TY7573-0DB4	3TY7573-0DD4	3TY7573-0DW4	3TY7573-0DF4	3TY7573-0DG4	3TY7573-0DQ4
3TF68	—	3TY7683-0DB4	—	—	3TY7683-0DF4	—	—

Main Contacts (Includes 3 Moving and 6 Fixed Contacts)



3TY7460-0A

Frame Size	Catalog No	List Price \$
3TF30-35	Not Replaceable	
3TF40-43	Not Replaceable	
3TF44	3TY7440-0A	
3TF45	3TY7450-0A	
3TF46	3TY7460-0A	
3TF47	3TY7470-0A	
3TF48	3TY7480-0A	
3TF49	3TY7490-0A	
3TF50	3TY7500-0A	
3TF51	3TY7510-0A	
3TF52	3TY7520-0A	
3TF53	3TY7530-0A	
3TF54	3TY7540-0A	
3TF55	3TY7550-0A	
3TF56	3TY7560-0A	
3TF57	3TY7570-0A	
3TF68	3TY7680-0B ¹⁾	
3TF69	3TY7690-0B ¹⁾	

Arc Chutes



3TY7482-0A

Frame Size	Catalog No
3TF30-35	Not Replaceable
3TF40-43	Not Replaceable
3TF44	3TY7442-0A
3TF45	3TY7452-0A
3TF46	3TY7462-0A
3TF47	3TY7472-0A
3TF48	3TY7482-0A
3TF50	3TY7502-0A
3TF51	3TY7512-0A
3TF52	3TY7522-0A
3TF53	3TY7532-0A
3TF54	3TY7542-0A
3TF55	3TY7552-0A
3TF56	3TY7562-0A
3TF57	3TY7572-0A
3TF68	Not Available
3TF69	Not Available

Due to the mature nature of some product series, supply cannot be guaranteed on all versions listed on this page.

1) Vacuum bottles with mounting hardware.



Contactors and Contactor Assemblies

3TF Contactors and 3TH Control Relays


Spare parts

Auxiliary Contact Blocks

Illustration	Frame Size	Auxiliary Contacts		NO/Early Make	NC/Early Break	Auxiliary Contact Mounting Position	Position	Block Location	Obsolete Catalog No	Current Catalog
		NO	NC							
		1	—	—	—		—	Top	—	3TX4010-2A
	3TF30 to 3TF35, 3TH3	—	1	—	—		—	Top	—	3TY4001-2A
		—	—	1	—		—	Top	—	3TX4010-4A
		—	—	—	1		—	Top	—	3TY4001-4A
	3TF40 to 3TF43	Not Replaceable								
	3TF44 to 3TF68	1	1	—	—					
		1	1	—	—					
		1	—	—	1					
	3TF46 to 3TF68	1	1	—	—					
	2nd Aux Contact Block	1	1	—	—					
	3TF46 to 3TF68	1	1	—	—					
	For Electronic Circuits	1	1	—	—					



3TY7561-1A



Mechanical Interlocks



3TX7466-1A

Frame Size	Catalog No
3TF44-54	3TX7466-1A

Arc Chutes



3TY6462-0A

Type	Frame Size	Catalog No	List Price \$	Frame Size	Catalog No
				3TB50	3TY6502-0A
3TB	3TB44	—		3TB52	3TY6522-0A
	3TB46	—		3TB54	3TY6542-0A
	3TB47	—		3TB56	3TY6562-0A
	3TB48	3TY6482-0A		3TB58	—

Control Relays, Type 3TH3, 3TH4 Coils, AC



3TY7403-0AK6

Type	Frame Size	Catalog No						
		24V AC	120V AC	208V AC	220/240V AC	277V AC	480V AC	600V AC
3TH	3TH30-33 3TH40-43	3TY7403-0AC2 3TY7403-0AK6	3TY7403-0AM1	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0	

Coils, DC

Type	Frame Size	Catalog No						
		12V DC	24V DC	42V DC	48V DC	110V DC	125V DC	240V DC
3TH	3TH30-33 3TH40-43	3TY4803-0BA4	3TY4803-0BB4	3TY4803-0BD4	3TY4803-0BW4	3TY4803-0BF4	3TY4803-0BG4	3TY4803-0BQ4

Auxiliary Contact Blocks¹⁾

Type	Frame Size	Auxiliary Contacts		Normally Open/ Early Make	Normally Closed/ Late Break	Block Location	Catalog No
		NO	NC				
3TH	3TH3	1	—	—	—	Top	3TX4010-2A
		—	1	—	—	Top	3TY4001-2A
		—	—	1	—	Top	3TX4010-4A
		—	—	—	1	Top	3TY4001-4A

Control Relays, Type 3TH8 Coils, AC

Type	Frame Size	Catalog No						
		24V AC	120V AC	208V AC	220/240V AC	277V AC	480V AC	600V AC
3TH	3TH80-83	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AM1	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0

Coils, DC

Type	Frame Size	Catalog No						
		12V AC	24V AC	42V AC	48V AC	110V AC	125V AC	240V AC
3TH	3TH80-83	3TY4803-0BA4	3TY4803-0BB4	3TY4803-0BD4	3TY4803-0BW4	3TY4803-0BF4	3TY4803-0BG4	3TY4803-0BQ4

Due to the mature nature of some product series, supply cannot be guaranteed on all versions listed on this page.

1) Maximum 4 blocks per relay.



Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT contactors, 3-pole, sizes S00 to S3

AC and DC operation

IEC 60 947, EN 60 947 (VDE 0660), UL 508

Design

The 3RT contactors are suitable for use in any climate. They are safe from touch to DIN VDE 0106 Part 100.

The 3RT contactors are available screw, spring-type, or ring lug connections.

An auxiliary contact is integrated in the basic unit of size S00 contactors. The basic units of sizes S0 to S3 only contain the main conducting paths.

All the basic units can be extended with auxiliary switch blocks. Cabinet units with 2 NO + 2 NC (terminal designations acc. to EN 50 012) are available as of size S0; the auxiliary switch block is removable.

The size S3 contactors have removable box terminals for the main conductor connections. Ring cable lugs or bars can thus also be connected.

Contact reliability

If voltages ≤ 110 V and currents ≤ 100 mA are to be switched, the auxiliary contacts of 3RT contactors and 3RH contactor relays should be used to ensure good contact stability.

These auxiliary contacts are suitable for electronic circuits with currents ≥ 1 mA at a voltage of 17 V.

Short-circuit protection of contactors

For the short-circuit protection of contactors without an overload relay, see the technical data.

For the short-circuit protection of contactors with an overload relay, see section 3.

Motor protection

3RU overload relays can be mounted onto the 3RT contactors for protection against overloads. The overload relays must be ordered separately (see section 3).

Surge suppression

The 3RT contactors can be retrofitted with RC elements, varistors, diodes or diode assemblies (combination of an interference suppression diode and a Zener diode for short tripping times) for suppressing opening surges in the coil.

The surge suppressors are plugged onto the front of size S00 contactors. Space is provided for them next to a snap-on auxiliary switch block.

With all size S0 to S3 contactors, varistors and RC elements can be plugged on directly at the coil terminals, either on the top or underneath. Diode assemblies are available in two different designs with different polarities. Depending on the application, they can be attached either only on the bottom (assembly with circuit-breaker) or only on the top (assembly with overload relay).

The plug-in direction of the diodes and diode assemblies is determined by a coding device. Exceptions: 3RT29 26-1E.00 and 3RT19 36-1T.00; in these cases the plug-in direction is identified by "+" and "-".


Coupling relays are supplied either without surge suppression or with a varistor or diode connected as standard, according to the design.

Note

The opening times of the NO contacts and the closing times of the NC contacts increase if the contactor coils are protected against voltage peaks (interference suppression diode 6 to 10 times; diode assemblies 2 to 6 times; varistor +2 ms to 5 ms).

3RT20 1. contactors (size S00),

Terminal designations acc. to EN 50 012 or DIN 50 005.

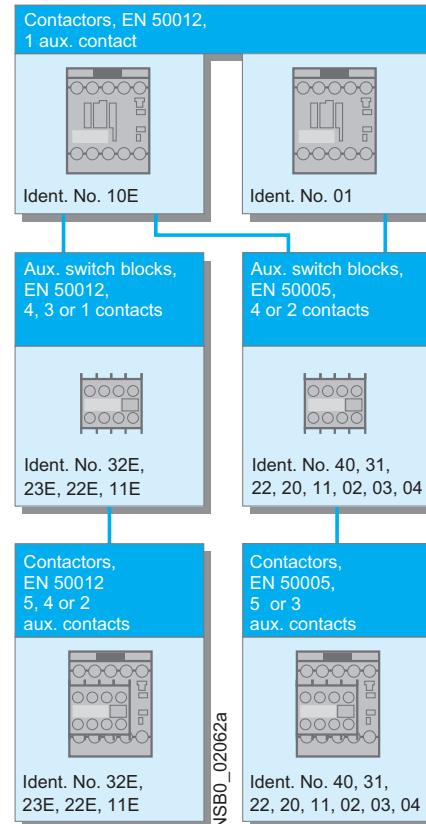

with identification numbers 40 to 02. The identification numbers on the auxiliary switch blocks apply only to the attached auxiliary contacts.

Single or 2-pole auxiliary switch blocks that can be connected on either the top or the bottom facilitate quick, straightforward wiring, especially when assembling feeders. These auxiliary switch blocks are only available with screw-type terminals.

The solid-state compatible 3RH29 11-1NF.. auxiliary switch blocks for size S00 contactors contain two enclosed contact elements. They are ideal for switching low voltages and currents (hard gold-plated contacts) or for use in dusty atmosphere. The contacts do not have positively-driven operation.

All the above-mentioned auxiliary switch variants can be snapped into the location holes on the front of the contactors. The auxiliary switch block has a centrally positioned release lever for disassembly.

Auxiliary switch blocks

The 3RT basic units can be extended with various auxiliary switch blocks, depending on the application:

Size S00 (3RT201)

Contactors with one NO contact as the auxiliary contact and with either screw or spring-type connections, identification number 10E, can be extended to obtain contactors with 2, 4 or 5 auxiliary contacts in accordance with EN 50 012 using auxiliary switch blocks. The identification numbers 11E, 22E, 23E and 32E on the auxiliary switch blocks apply to the complete contactors. These auxiliary switch blocks cannot be combined with contactors that have an NC contact in their basic unit, identification number 01, as these are coded.

All size S00 contactors with one auxiliary contact, identification number 10E or 01, and the contactors with 4 main contacts can be extended to obtain contactors with 3 or 5 auxiliary contacts (contactors with 4 main contacts: 2 or 4 auxiliary contacts) according to EN 50 005 using auxiliary switch blocks



Contactors and Contactor Assemblies


Contactors for Switching Motors

3RT2 contactors, 3-pole, sizes S00 to S3


2

CONTACTORS AND ASSEMBLIES

3RT20 2. to 3RT20 4. contactors (sizes S0 to S3),
single-pole auxiliary switch blocks,
terminal designations acc. to EN 50 005 or EN 50 012.

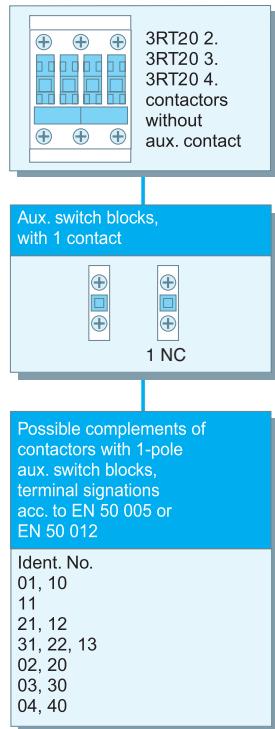

3RT20 2. to 3RT20 4. contactors (sizes S0 to S3),
single-pole auxiliary switch blocks,
terminal designations acc. to EN 50 005 or EN 50 012.

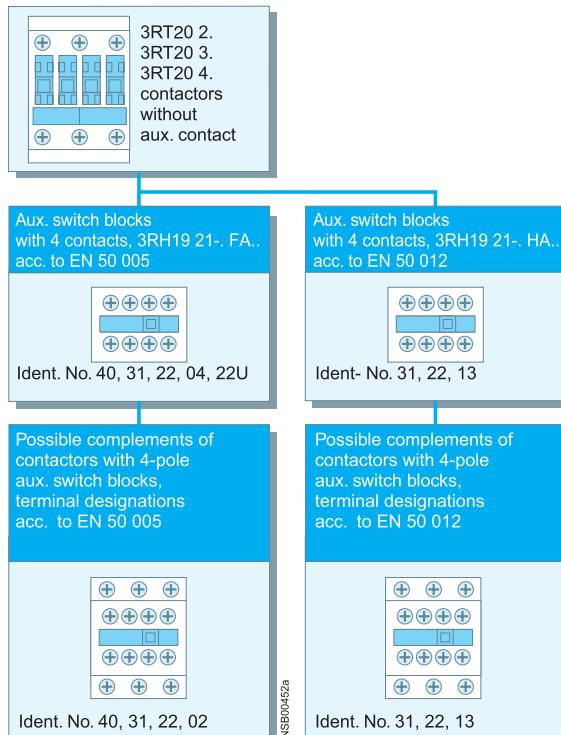

Sizes S0 to S3 (3RT202 to 3RT204)

An extensive range of auxiliary switch blocks is available for various applications. The contactors themselves do not have an integrated auxiliary conducting path.

The auxiliary switch variants are identical for all size S0 to S3 contactors.

One 4-pole or up to four single-pole auxiliary switch blocks (with screw or spring-type connections) can be snapped onto the front of the contactors. When the contactors are energized, the NC contacts open before the NO contacts close.

The terminal designations of the single-pole auxiliary switch blocks consist of location digits on the basic unit and function digits on the auxiliary switch blocks.

In addition, 2-pole auxiliary switch blocks (screw-type terminals) are provided for cable entries from above or below in the style of a four-connector block (feeder auxiliary switch).

If the available installation depth is restricted, 2-pole auxiliary switch blocks (screw or spring-type connections) can be mounted laterally on the left or right.

The auxiliary switch blocks designed for mounting onto the front can be disassembled with the aid of a centrally positioned release lever; the laterally mountable auxiliary switch blocks can be removed easily by pressing on the fluted grips.

The terminal designations of the individual auxiliary switch blocks comply with EN 50 005 or EN 50 012, while those of the complete contactors with an auxiliary switch block with 2 NO + 2 NC comply with EN 50 012.

The laterally mountable auxiliary switch blocks to EN 50 012 can only be used if no 4-pole auxiliary switch blocks are snapped onto the front. If single-pole auxiliary switch blocks are used in addition, the location digits on the contactor must be noted.

Two enclosed contact elements and two standard contact elements are available for the 3RH29 21-FE22 solid-state compatible auxiliary switch block mountable on the front. The laterally mountable 3RH29 21-2DE11 solid-state compatible auxiliary switch block contains 2 enclosed contact elements (1 NO + 1 NC). The enclosed contact elements are ideal for switching low voltages and currents (hard gold-plated contacts) or for use in a dusty atmosphere. The contacts are positively driven.

Sizes S0 and S2 (3RT202 and 3RT203)

Up to four auxiliary contacts can be mounted, whereby any design of the auxiliary switch blocks is permitted. If two 2-pole, laterally mounted, auxiliary switch blocks are used, one must be mounted on the left and one on the right for the sake of symmetry.

Under certain circumstances, more auxiliary contacts are allowed for size S2 (please ask for details).

With regard to 3RT23 and 3RT24 4-pole contactors, please refer to pages 2/12 to 2/14.

Sizes S3 to S12 (3RT204 to 3RT107)

Up to eight auxiliary contacts can be mounted, whereby the following points must be noted:

- Of these eight auxiliary contacts, no more than four must be NC contacts.
- If laterally mounted auxiliary switch blocks are used, they must be symmetrical.

With regard to 3RT15 4-pole contactors, please refer to pages 2/13 to 2/18.



Contactors for Switching Motors

3RT1 contactors, 3-pole, sizes S6 to S12

Overview

Design

- 3RT10 contactors for switching motors
- 3RT12 vacuum contactors for switching motors
- 3RT14 contactors for AC-1 applications

Operating mechanism

Two types of solenoid-operated mechanism are available:

- Conventional operating mechanism
- Solid-state operating mechanism (with 3 performance levels)

UC operation

The contactors can be AC (40 to 60 Hz) and DC driven.

Withdrawable coils

To allow easy coil changing, for example if the application is changed, the magnetic coil can be pulled out upwards without tools after the release mechanism has been actuated, and can be replaced by any other required coil of the same size.

Auxiliary contact complement

The contactors can be equipped with a maximum of 8 auxiliary contacts, with identical auxiliary switch blocks from S0 to S12. Of these, no more than 4 are permitted to be NC contacts.

- 3RT10 and 3RT14 contactors: auxiliary contacts mounted laterally and on front
- 3RT12 vacuum contactors: auxiliary contact mounted laterally

Contactors with conventional operating mechanism

3RT1...-A:

The magnetic coil is switched on and off directly with the control supply voltage U_s via terminals A1/A2.

Multi-voltage range for the control supply voltage U_s :
Several closely adjacent control supply voltages, available around the world, are covered by just one coil, for example UC 110-115-120-127 V or UC 220-230-240 V.

In addition, allowance is also made for a coil voltage tolerance of 0.8 times the lower rated control supply voltage ($U_{s \min}$) and 1.1 times the upper rated control supply voltage ($U_{s \max}$), within which the

contactor switches reliably and no thermal overloading occurs.

Contactors with solid-state operating mechanism

The power required for reliable switching and holding is supplied selectively to the magnetic coil by series-connected control electronics.

Features:

- Extended voltage range for the control supply voltage U_s :

Compared with the conventional operating mechanism, the solid-state operating mechanism covers an even broader range of globally available control supply voltages within one coil variant. For example, the globally available voltages 200-208-220-230-240-254-277 V are covered with the coil for UC 200 to 277 V ($U_{s \min}$ to $U_{s \max}$).

- Extended coil voltage tolerance 0.7 to $1.25 \times U_s$:

On account of the broad range for the rated control supply voltage and the additionally allowed coil voltage tolerance of 0.8 $\times U_{s \min}$ to 1.1 $\times U_{s \max}$, an extended coil voltage tolerance of at least 0.7 to 1.25 $\times U_s$, within which the contactors will operate reliably, is available for the most common control supply voltages of 24, 110 and 230 V.

- Bridging short-time voltage dips:

Control voltage failures dipping to 0 V (at A1/A2) are bridged for up to approx. 25 ms, therefore preventing unintentional disconnection.

- Defined ON and OFF thresholds:

As of voltages $\geq 0.8 \times U_{s \min}$, the electronics reliably switch the contactor on and as of $\leq 0.5 \times U_{s \min}$ it is reliably switched off. The differential travel in the switching thresholds prevents chattering of the main contacts and hence increased wear or welding when operated in weak, unstable networks. Similarly, thermal overloading of the contactor coil is prevented if the voltage applied is too low – the contactor is not switched on and is operated with overexcitation.

- Low control power consumption when closing and in closed state:

Electromagnetic compatibility (EMC)

The contactors with solid-state operating mechanism conform to the requirements for operation in industrial plants.

• Noise immunity

- Burst (IEC 61 000-4-4): 4 kV
- Surge (IEC 61 000-4-5): 4 kV
- Electrostatic discharge, ESD (IEC 61 000-4-2): 8/15 kV
- Electromagnetic field (IEC 61 000-4-3): 10 V/m

• Emitted interference

Limiting value class A to EN 55 011

Note:

In connection with converters, the control cables should be installed separately from the load cables to the converter.


3RT1...-N: for DC 24 V PLC output

2 control options:

- Control without an interface directly via a DC 24 V ≥ 30 mA PLC output (EN 61 131-2). Connection via a 2-pole plug-in connection; the connector, using screwless spring-force technology, is included in the scope of supply. The control supply voltage for supplying power to the solenoid operating mechanism must be connected to A1/A2.

Note:

Before start-up, the sliding-dolly switch for PLC operation must be moved to the "PLC ON" position (setting ex works: "PLC OFF").




① Sliding-dolly switch, must be in PLC "ON" position
② Plug-in connection, 2-pole

- Conventional control by applying the control supply voltage at A1/A2 via a switching contact.

Note:

The sliding-dolly switch must be in the "PLC OFF" position (= setting ex works).



① Sliding-dolly switch, must be in PLC "OFF" position



Contactors and Contactor Assemblies

Contactors for Switching Motors


3RT1 contactors, 3-pole, sizes S6 to S12

Overview

Contactors with solid-state operating mechanism

3RT1...-P: for DC 24 V PLC output or PLC relay output, with indication of remaining lifetime

(Indication of remaining lifetime RLT: see 2/69.)

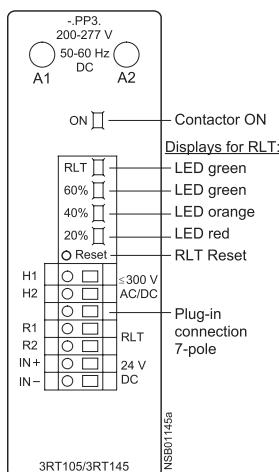

To supply power to the solenoid operating mechanism and the remaining lifetime indication, the control supply voltage U_s must be run to terminals A1/A2 of the laterally mounted electronics module. The control inputs of the contactor are brought out to a 7-pole plug-in connection; the connector, using screwless spring-force technology, is included in the scope of supply.

- The remaining lifetime RLT status signal is available at terminals R1/R2 via a floating relay contact (hard gold-plated, enclosed) and can be processed for example via SIMOCODE-DP or PLC inputs or elsewhere.

Permissible current carrying capacity of relay output R1/R2:

- $I_e/AC-15/24$ to 230 V: 3 A
- $I_e/DC-13/24$ V: 1 A


• LED indicators

The following statuses are indicated by LEDs on the laterally mounted electronics module:

- Contactor ON (energized state):
Green LED ("ON")
- Indication of remaining lifetime (see 2/69)

2 control options:

- Contactor control without an interface directly via a DC 24 V ≥ 30 mA PLC output (EN 61 131-2) via terminals IN+/IN-.




Electronics module of 3RT1...-P contactor
Plug-in connection, 7-pole

- S1 Changeover switch from automatic control via PLC semiconductor output to local control
- S2 Local control option

Possibility of switching from automatic control to local control via terminals H1/H2, i.e. automatic control via a PLC or SIMOCODE-DP/PROFIBUS-DP can be deactivated, for example during start-up or in the event of a fault, and the contactor can be controlled manually.

- Contactor control via relay outputs, e.g. by
 - PLC
 - SIMOCODE-DP 3UF5 via terminals H1/H2.
 Contact loading:
 U_s /approx. 5 mA.

When operated via SIMOCODE-DP, a communication link to PROFIBUS-DP is also provided.



Electronics module of 3RT1...-P contactor
Plug-in connection, 7-pole

- S1 Changeover switch from automatic control, e.g. via SIMOCODE-DP or PLC relay output to local control
- S2 Local control option

3RT12 vacuum contactors

In contrast with the 3RT10 contactors – the main contacts operate in air under atmospheric conditions – the contact gaps of the 3RT12 vacuum contactors are contained in hermetically enclosed vacuum contact tubes. Neither arcs nor arcing gases are produced. The particular benefit of 3RT12 vacuum contactors, however, is that their electrical endurance is at least twice as long as that of 3RT10 contactors.

They are therefore particularly well suited to frequent switching in jogging/mixed operation, for example in crane control systems.

Advantages:

- Very long electrical endurance
- High short-time current-carrying capacity for heavy starting
- No open arcs, no arcing gases, i.e. no minimum clearances from earthed parts required either
- Longer maintenance intervals
- Increased plant availability

Notes on operation:

- Switching motors with rated operational voltages U_e > 500 V:

In order to damp overvoltages and protect the motor winding insulation against multiple reignition when switching off three-phase motors, it is recommended to fit the contactors on the outgoing side (T1/T2/T3) with the 3RT19 66-1PV. surge suppression module – RC varistor – (accessory).

This additional equipment is not required for operation in circuits with converters. It might be damaged by the voltage peaks and harmonics generated.

- Switching DC voltage:
Vacuum contactors are basically unsuitable for switching DC voltage.



Contactor Assemblies for Switching Motors

Contactor assemblies for WYE-delta starting

Overview

The contactor assemblies for star-delta starting can be ordered as follows:

- Sizes S00-S0 as assemblies. (see pages 2/47-2/48)
- Sizes S2-S12 as components for customer assembly

HP	Calculated horsepower ratings at 460 V AC	Operat. current I_e A	Motor current A	Size	Accessories for customer assembly		
					Line/delta contactor	WYE contactor	Time-delay relay
30	50	9.5 ... 13.8 12.1 ... 17.2 15.5 ... 21.5 19 ... 27.6 24.1 ... 34 31 ... 43 37.9 ... 55.2 48.3 ... 65	S2-S2-S0	3RT2028	3RT2026		3RP2574-1N.30 3RA2933-2C ³⁾
50	80	31 ... 43.1 37.9 ... 55.2 48.3 ... 69 62.1 ... 77.6	S2-S2-S2	3RT2935	3RT2035		3RA2933-2BB1 ³⁾
60	86	62.1 ... 77.8 69 ... 86		3RT2036			
75	115	31 ... 43.1 37.9 ... 55.2 48.3 ... 69 62.1 ... 77.6 77.6 ... 108.6	S3-S3-S2	3RT2045	3RT2035	3RP2574-1N.30	3RA2943-2C ³⁾
100	150	98.3 ... 129.3 120.7 ... 150		3RT2045	3RT2036		
125	160	86 ... 160	S6-S6-S3	3RT1054	3RT2045	3RP2574-1N.30	
150	195	86 ... 195					
190	230	86 ... 230		3RT1055	3RT2046		
200	280	86 ... 280		3RT1056	3RT2046		
250	350	95 ... 350	S10-S10-S6	3RT1064	3RT1054	3RP2574-1N.30	
300	430	95 ... 430		3RT1065	3RT1056		
400	540	347 ... 540	S12-S12-S10	3RT1075	3RT1064	3RP2574-1N.30	
450	610	347 ... 610					
500	690	347 ... 690			3RT1065		
650	850	347 ... 850		3RT1076	3RT1066		

For accessories, see page 2/89.

For circuit diagrams, see page 2/207.

1) The installation kit contains mechanical interlock; 3 connecting clips; wiring connectors on the top (connection between line contactor and delta contactor) and the bottom (connection between delta contactor and star contactor); WYE jumper.

2) The installation kit contains 5 connecting clips; wiring connectors on the top (connection between line contactor and delta contactor) and the bottom (connection between delta contactor and WYE contactor); star jumper.



Contactor Assemblies for Switching Motors

Contactor assemblies for WYE-delta starting

Installation kit B for single infeed	WYE jumper	Baseplates	Overload relay, thermal		Overload relay, solid-state	
			Range of overload relay, thermal [A]	Order No. overload relay, thermal	Range of overload relay, solid-state [A]	Order No. overload relay, solid-state
3RA1933-3D ⁴⁾	3RT1926-4BA31	3RA2932-2E	5.5 ... 8	3RU2136-1HB	12.5 ... 50	3RB3036-1UB0
			7 ... 10	3RU2136-1JB0		
			9 ... 12.5	3RU2136-1KB0		
			11 ... 16	3RU2136-4AB0		
			14 ... 20	3RU2136-4BB0		
	3RT1936-4BA31	3RA2932-2F	18 ... 25	3RU2136-4DB0	20 ... 80	3RB3036-1WB0
			22 ... 32	3RU2136-4EB0		
			28 ... 40	3RU2136-4FB0		
			36 ... 45	3RU2136-4GB0		
			40 ... 50	3RU2136-4HB0		
3RA1943-3D ⁴⁾	3RT1946-4BA31	3RA2942-2E	28 ... 40	3RU2146-4FB0	12.5 ... 50	3RB3046-1UB0
			36 ... 45	3RU2146-4HB0		
			45 ... 63	3RU2146-4JB0		
			57 ... 75	3RU2146-4KB0		
			70 ... 90	3RU2146-4LB0		
			80 ... 100 ⁷⁾	3RU2146-4MB0		
3RA1953-3D ⁵⁾	3RT1946-4BA31	3RA1952-2E	–	–	50 ... 200	3RB2056-1FC2

3) Installation kit contains wiring connector on the bottom (connection between delta contactor and WYE contactor) and WYE jumper.

4) Wiring connector on top from reversing contactor assembly (note conductor cross-sections).

5) A mechanical interlock adapter, 3RA1954-2G, is required to use the standard 3RA1954-2A mechanical interlock for the AC version of the S6-S6-S3 WYE-Delta starter. The S6-S6-S3 WYE-Delta DC version would require a special custom build spacer, which is not manufactured, to allow the mechanical interlock to operate.

6) Only use wiring connector on the top from reversing contactor assembly (note conductor cross-sections); order WYE jumper in addition.

7) For overload relays >100A, see 3RB2 electronic Section 3, page 23.



Contactors and Contactor Assemblies

Contactor Assemblies for Switching Motors

Contactor assemblies for WYE-delta starting

Application

WYE-delta starting can only be used either if the motor normally operates in a Δ (delta) connection or starts softly or if the load torque during Y starting is low and does not increase sharply. On the Y step the motors can carry approximately 50% (class KL 16) or 30% (class KL 10) of their rated torque; the starting torque is approximately $1/3$ of that during direct on-line starting. The starting current is approximately 2 to 2.7 times the rated motor current.

The changeover from Y to Δ must not be effected until the motor has run up to rated speed. Drives which require this changeover to be performed earlier are unsuitable for WYE-delta starting.

The ratings given in the above table are only applicable to motors with a starting current ratio of $I_A \leq 8.4 \times I_N$ and using either a 3RT19 16-2G or 3RT19 26-2G solid-state time-delay auxiliary switch block with a WYE-delta function or a 3RP1574 WYE-delta time-delay relay with a dead interval of approximately 50 ms on reversing.

For the circuit diagrams for the main and control circuits, see page 2/161. The size selected for the installation kits for WYE-delta starting is determined by the line contactor.

Design

Components for customer assembly

Installation kits with wiring connectors and, if necessary, mechanical connectors are available for contactor assemblies for WYE-delta starting. Contactors, overload relays, star-delta time-delay relays and auxiliary switches for the electrical interlock – if required also feeder terminals, mechanical interlocks¹⁾ and baseplates – must be ordered separately.

The wiring installation kits for sizes S00 and S0 contain the top and bottom main conducting path connections between the line and delta contactors (top) and between the delta and WYE contactors (bottom).

In the case of sizes S2 to S12 only the bottom main conducting path connection between the delta and WYE contactors is included in the wiring connector, owing to the larger conductor cross-section at the infeed.

Motor protection

Overload relays or thermistor motor protection tripping units can be used for overload protection.

The overload relay can be either mounted onto the line contactor or separately fitted. It must be set to 0.58 times the rated motor current.

Surge suppression

Sizes S00 to S3

All contactor assemblies can be fitted with RC elements, varistors or diode assemblies for damping opening surges in the coil.

As with the individual contactors, the surge suppressors can either be plugged onto the top of the contactors (S00) or fitted onto the coil terminals on the top or bottom (S0 to S3).

Sizes S6 to S12

The contactors are fitted with varistors as standard.


1) Exception:
The mechanical interlock between the delta and WYE contactors is included in the installation kit for size S00 contactor assemblies.



Selection and ordering data

Fully wired and tested contactor assemblies · Size S00-S00-S00 · Up to 11 kW

The figure shows the version with screw terminals

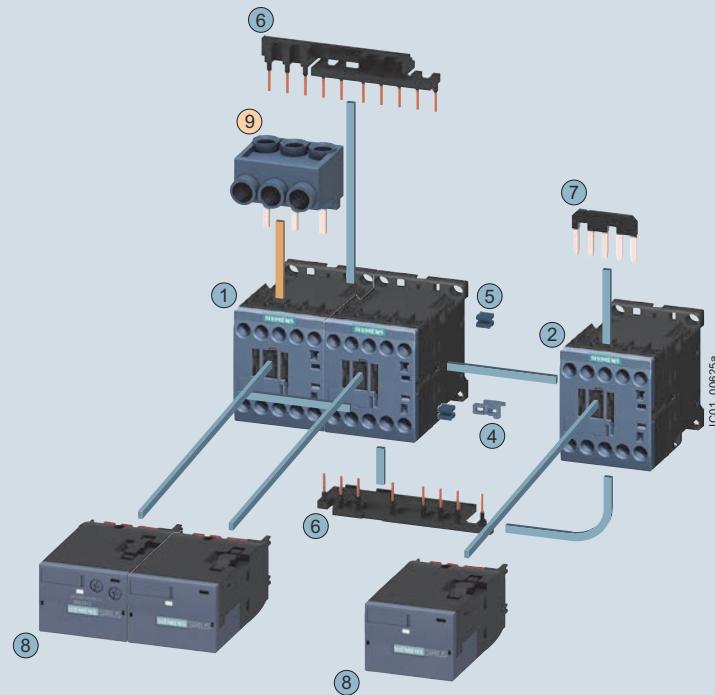

Mountable accessories (optional)

To be ordered separately Type Page

⑨ Three-phase infeed terminal¹⁾ 3RA2913-3K 2/89

Complete contactor assembly for star-delta (wye-delta) starting

Individual parts Type Page

Q11²⁾ Q13 Q12

①②③ Contactors, 5.5 kW	3RT2015	3RT2015	3RT2015	2/8
①②③ Contactors, 7.5 kW	3RT2017	3RT2017	3RT2015	2/8
①②③ Contactors, 11 kW	3RT2018	3RT2018	3RT2016	2/8
④ ... ⑦ Assembly kit S00-S00-S00 comprising:	3RA2913-2BB1			

④ Mechanical interlock	
⑤ Four connecting clips for three contactors	
⑥ Wiring modules on top and bottom for connecting the main and auxiliary circuits	
⑦ Star jumper	

⑧ Function modules for star-delta (wye-delta) starting	3RA2816-0EW20
--	---------------

2/33

¹⁾ Part ⑨ can only be mounted in the case of contactors with screw terminal.²⁾ The version with 1 NO is required for momentary-contact operation.Note:

When the function modules for contactor assemblies for wye-delta starting are used, no other auxiliary switches are allowed to be mounted on the basic units.




Contactor Assemblies for Switching Motors

Contactor assemblies for WYE-delta starting

Fully wired and tested contactor assemblies · Size S0-S0-S0 · Up to 22 kW

The figure shows the version with screw terminals

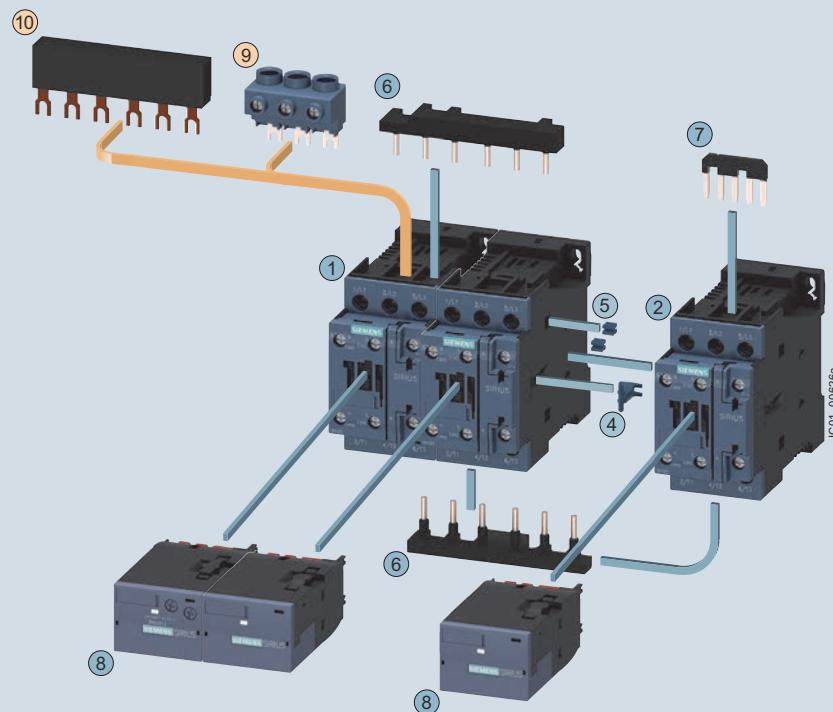

Mountable accessories (optional)

To be ordered separately	Type	Page
⑨ Three-phase infeed terminal ¹⁾	3RV2925-5AB	2/89
⑩ Three-phase busbar ¹⁾	3RV1915-1AB	1/8

Complete contactor assembly for star-delta (wye-delta) starting

Individual parts	Type	Page
①②③ Contactors, 11 kW	Q11	3RT2024
①②③ Contactors, 15/18.5 kW	Q13	3RT2024
①②③ Contactors, 22 kW	Q12	3RT2026
④ ... ⑦ Assembly kit S0-S0-S0 comprising:		3RT2027
④ Mechanical interlock	3RA2923-2BB1	2/89
⑤ Four connecting clips for three contactors		
⑥ Wiring modules on top and bottom for connecting the main and auxiliary circuits		
⑦ Star jumper		
Function modules for star-delta (wye-delta) starting	3RA2816-0EW20	2/33

¹⁾ The parts ⑨ and ⑩ can only be mounted with contactors with screw terminal, the ⑥ wiring modules must be removed beforehand.

Note:

When the function modules for contactor assemblies for wye-delta starting are used, no other auxiliary switches are allowed to be mounted on the basic units.



Contactor Assemblies for Switching Motors


Contactor assemblies for WYE-delta starting

Size S2-S2-S0 · up to 65 A, 30 HP

The figure shows the version with screw terminals in S2-S2-S2

2

CONTACTORS AND ASSEMBLIES

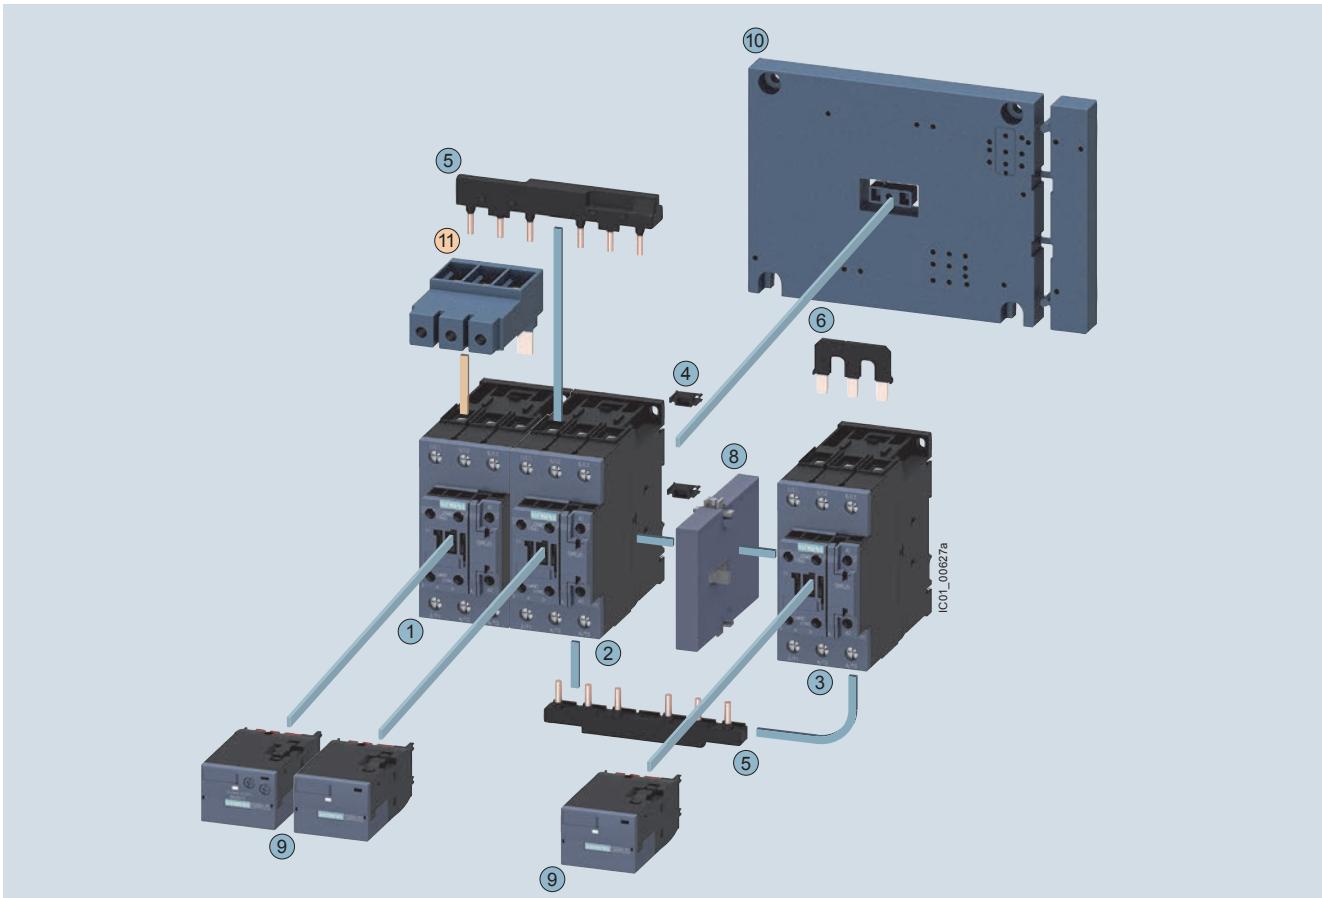

Mountable accessories (optional)

To be ordered separately Type

⑪ Three-phase infeed terminal 3RV2935-5A

Complete contactor assembly for star-delta (wye-delta) starting

Individual parts

Type

Q11 Q13 Q12

①②③ Contactors, 22/30 kW 3RT2035 3RT2035 3RT2026

①②③ Contactors, 37 kW 3RT2035 3RT2035 3RT2027

①②③ Contactors, 45 kW 3RT2036 3RT2036 3RT2028

④ ... ⑦ Assembly kit S2-S2-S0 comprising:

④ Four connectors for three contactors (not required for fully pre-wired contactor assemblies for star-delta (wye-delta) starting)

⑤ Wiring modules on top and bottom for connecting the main and auxiliary circuits

⑥ Star jumper S2

⑦ Cable for connecting the A2 coil contact from the line contactor with the A2 coil contact of the delta contactor (not shown in the drawing)

⑧ Mechanical interlock 3RA2934-2B

⑨ Function modules for star-delta (wye-delta) starting 3RA2816-0EW20

⑩ Base plate star-delta (wye-delta) 3RA2932-2F

For overview, see page 2/117.

For circuit diagrams, see page 2/207.




Contactor Assemblies for Switching Motors

Contactor assemblies for WYE-delta starting

Size S2-S2-S2 · up to 86 A, 60 HP

2

CONTACTORS AND ASSEMBLIES

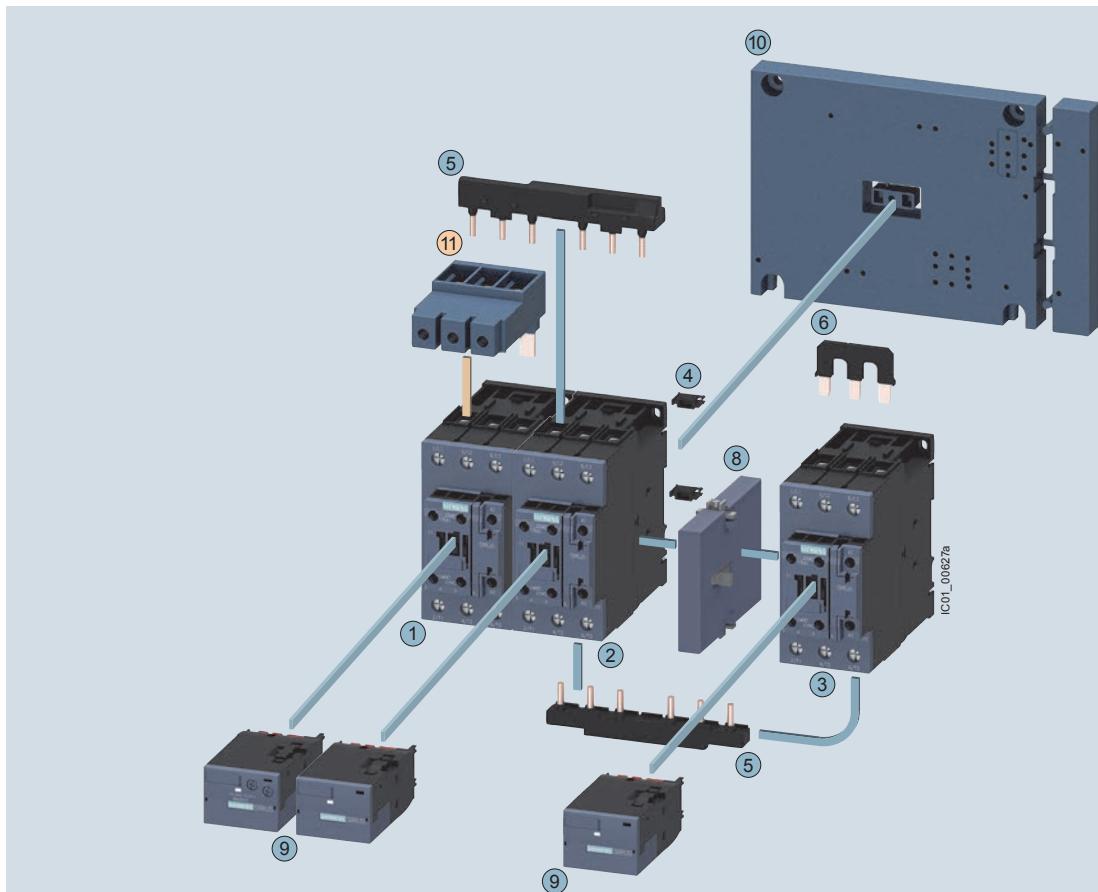

Mountable accessories (optional)

To be ordered separately	Type
11 Three-phase infeed terminal	3RV2935-5A

Complete contactor assembly for star-delta (wye-delta) starting

Individual parts	Type	Q11	Q13	Q12
1, 2, 3 Contactors, 55 kW	3RT2037	3RT2037	3RT2035	
4 ... 7 Assembly kit S2-S2-S2 comprising:	3RA2933-2BB1			
4 Four connectors for three contactors (not required for fully pre-wired contactor assemblies for star-delta (wye-delta) starting)				
5 Wiring modules on top and bottom for connecting the main and auxiliary circuits				
6 Star jumper S2				
7 Cable for connecting the A2 coil contact from the line contactor with the A2 coil contact of the delta contactor (not shown in the drawing)				
8 Mechanical interlock	3RA2934-2B			
9 Function modules for star-delta (wye-delta) starting	3RA2816-0EW20			
10 Base plate star-delta (wye-delta)	3RA2932-2F			

For overview, see page 2/117.

For circuit diagrams, see page 2/207.





Contactor Assemblies for Switching Motors

Contactor assemblies for WYE-delta starting

Size S3-S3-S2 · up to 150 A, 100 HP

2

CONTACTORS AND ASSEMBLIES

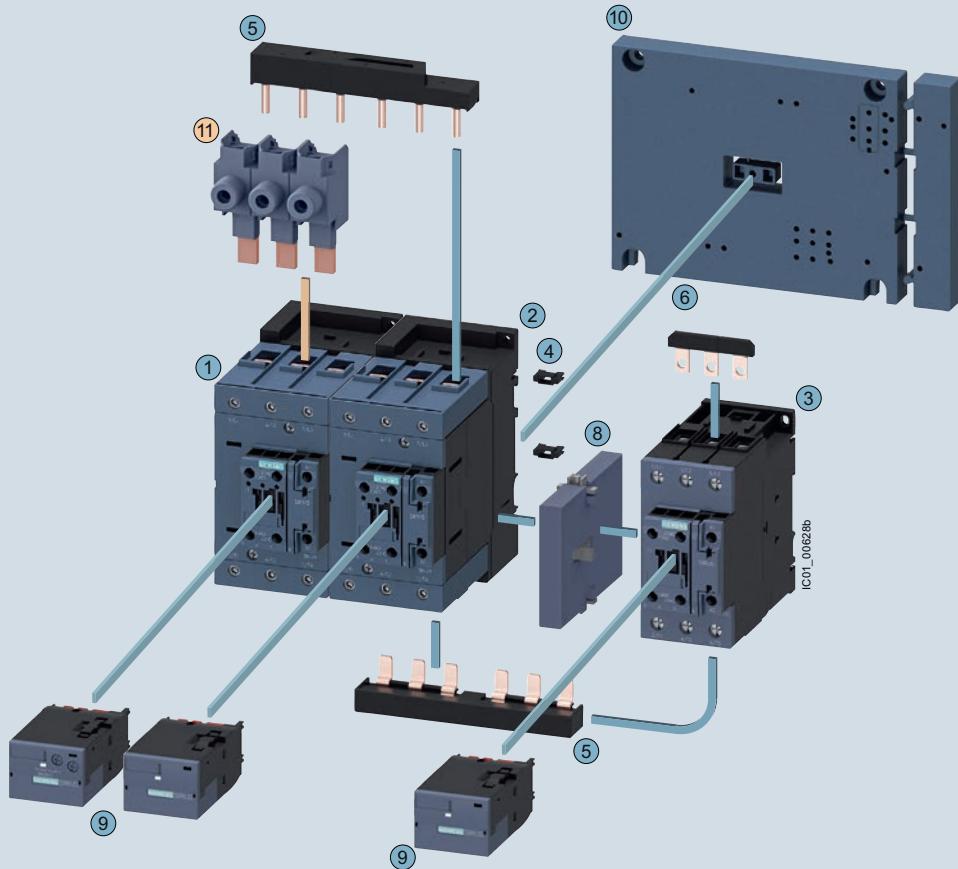

Mountable accessories (optional)

To be ordered separately	Type
⑪ Single-phase infeed terminal (3 units are required)	3RA2943-3L

Complete contactor assembly for star-delta (wye-delta) starting

Individual parts	Type	Q11	Q13	Q12
①②③ Contactors, 55 kW	3RT2045	3RT2045	3RT2035	
①②③ Contactors, 75 kW	3RT2045	3RT2045	3RT2036	
①②③ Contactors, 90 kW	3RT2046	3RT2046	3RT2037	
④ ... ⑦ Assembly kit S3-S3-S2 comprising:	3RA2943-2C			
④ Two connectors for three contactors (not required for fully pre-wired contactor assemblies for star-delta (wye-delta) starting)				
⑤ Wiring modules on top and bottom (S3-S2) for connecting the main and auxiliary circuits and a cable set for the auxiliary circuit				
⑥ Star jumper S2				
⑦ Cable for connecting the A2 coil contact from the line contactor with the A2 coil contact of the delta contactor (not shown in the drawing)				
⑧ Mechanical interlock	3RA2934-2B			
⑨ Function modules for star-delta (wye-delta) starting	3RA2816-0EW20			
⑩ Base plate star-delta (wye-delta)	3RA2942-2F			

¹⁾ Contactor assembly for star-delta (wye-delta) starting for customer assembly in size S3-S3-S3 (not shown): The 3RA2943-2BB assembly kit is to be used here, [see page 3/106](#).

For overview, see page 2/117.

For circuit diagrams, see page 2/207.



Contactors and Contactor Assemblies

Control Relays, Coupling Relays

3RH21 control relays, size S00 with 4 or 8 contacts

AC and DC operation

IEC 60947, EN 60947.

The 3RH2 contactor relays have screw, ring lug terminal or spring-type terminals. Four contacts are available in the basic unit.

The 3RH2 contactor relays are suitable for use in any climate. They are finger-safe according to EN 50274. The devices with ring lug terminal connection comply with degree of protection IP20 when fitted with the related terminal cover.

Contact reliability

High contact stability at low voltages and currents, suitable for solid-state circuits with currents ≥ 1 mA at a voltage of 17 V.

Surge suppression

RC elements, varistors, diodes or diode assemblies (combination of a diode and a Zener diode) can be plugged onto all contactor relays from the front for damping opening surges in the coil. The plug-in direction is determined by a coding device.

Note:

The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assemblies 2 to 6 times, varistor +2 to 5 ms).

Auxiliary switch blocks

The 3RH2 contactor relays can be expanded by up to four contacts by the addition of snap-on auxiliary switch blocks.

The auxiliary switch block can easily be snapped onto the front of the contactors. The auxiliary switch block has a centrally positioned release lever for disassembly.


The contactor relays with 4 contacts according to EN 50011, with the identification number 40E, can be extended with 80E to 44E auxiliary switch blocks to obtain contactor relays with 8 contacts according to EN 50011. The identification numbers 80E to 44E on the auxiliary switch blocks apply to the complete contactors. These auxiliary switch blocks (3RH29 11-1GA..) cannot be combined with contactor relays with identification numbers 31E and 22E; they are coded.

All contactor relays with 4 contacts according to EN 50011, identification numbers 40E to 22E, can be extended with auxiliary switch blocks 40 to 02 to obtain contactor relays with 6 or 8 contacts in accordance with EN 50005. The identification numbers on the auxiliary switch blocks apply only to the attached auxiliary switch blocks.

In addition, fully mounted 3RH22 8-pole contactor relays are available; the mounted 4-pole auxiliary switch block in the 2nd tier is not removable. The terminal designations are according to EN 50011.

These versions are built according to special Swiss regulations SUVA and are distinguished externally by a red labeling plate.

Of the auxiliary contacts (integrated plus mountable) possible on the device, no more than four NC contacts are permitted.

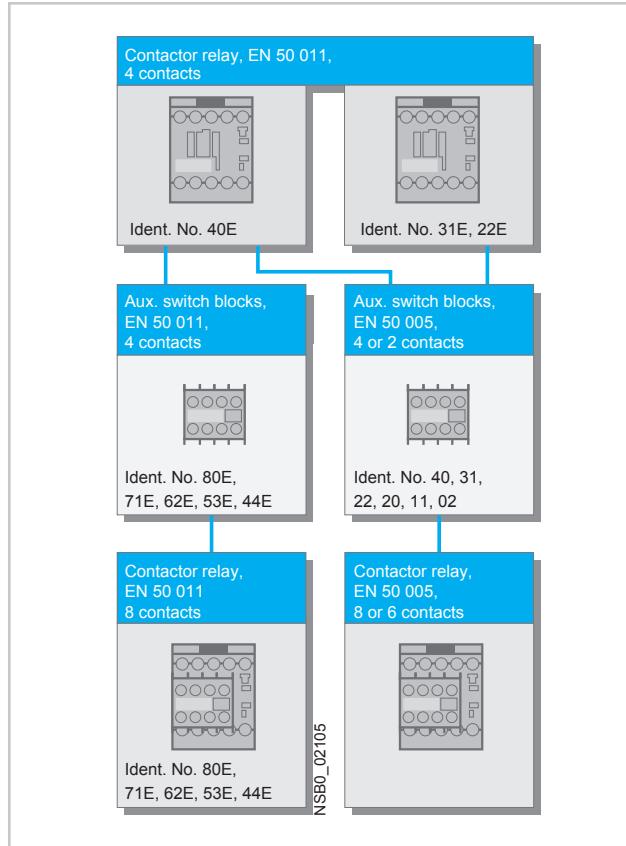

3RH24 latched control relays, size S00

Application

AC and DC operation

IEC 60 947, EN 60 947 (VDE 0660)

The terminal designations comply with EN 50 011.

The relay coil and the coil of the release solenoid are both designed for continuous duty.

The number of auxiliary contacts can be extended by means of auxiliary switch blocks (up to 4 poles).

RC elements, varistors, diodes or diode assemblies can be plugged onto both coils

from the front for damping opening surges.

The control relay can also be switched on and released manually.

**Design**

EN 60 947-4-1 (VDE 0660 Part 102).

The 3TF contactors are suitable for use in any climate. They are safe from touch according to DIN VDE 0106 Part 100. Terminal covers (see accessories) may have to be fitted onto the connecting bars, depending on the configuration with other devices.

Main contacts**Contact erosion indication with 3TF68/69 vacuum contactors**

The contact erosion of the vacuum interrupters can be monitored in the closed position by means of three white double slides on the contactor base.

The vacuum interrupter must be replaced if the distance indicated by one of the double slides is less than 0.5 mm while the contactor is in the closed position.

It is advisable to replace all three interrupters in order to ensure maximum reliability.

Auxiliary contacts

The terminal designations comply with EN 50 012.

When the contactors are energized, the NC contacts open before the NO contacts close.

Contact reliability

The auxiliary contacts are extremely reliable and as such are suitable for electronic circuits

- with currents ≥ 1 mA,
- at voltages greater than 17 V.

Surge suppression**Control circuit**

Protection of the coil circuits against surges:

AC operation

- fitted with varistors as standard.

DC operation

Retrofitting options:

- varistors.

Electromagnetic compatibility (EMC)

3TF68/69-..**C** contactors for AC operation are equipped with an electronically controlled solenoid mechanism with a high level of immunity to interference (see table opposite).

Note:

In operation in installations where it is not possible to observe the emitted interference limits, e.g. as an output contactor in static frequency changers, use of 3TF68/69-..**Q** contactors (NS E catalogue, available in German) is recommended, without a main conductor path circuit (for further information refer also to the description below).

Contactor Type	Rated control supply voltage U_s	Overvoltage type (IEC 60 801)	Severity to IEC 60 801	Surge strength
3TF68 44-C.., 3TF69 44-C..	110 V ... 132 V	Burst	3	2 kV
		Surge	4	6 kV
	200 V ... 276 V	Burst	4	4 kV
		Surge	4	5 kV
	380 V ... 600 V	Burst	4	4 kV
		Surge	4	6 kV

Circuit of the main conducting paths

An integrated RC varistor circuit in the main conducting paths of the contactors damps the rate of rise of switching overvoltages to uncritical values. Multiple restriking of the switching arcs is thereby prevented.

The operator of an installation can thus assume that the danger to the motor winding arising from switching overvoltages with a high rate of rise is ruled out.

The contactors can therefore be used without reservation for all AC switching applications, including three-phase motors with the demanding AC-4 utilization category.

Important note

The surge suppression circuit is not necessary when 3TF68/69 contactors are used in circuits with e.g. d.c. choppers, frequency converters or variable-speed drives.

It might be damaged by the voltage peaks and harmonics generated. This may also cause phase-to-phase short-circuits in the contactors.

Remedy: Order the special contactor design without surge suppression. In this case the Order No. must be supplemented with **"-Z"** and the order code **"A02"**. No additional charge is made.

Short-circuit protection of contactors

For assembling fuseless load feeders, please select a circuit-breaker/contactor combination according to the brochure entitled "Verbraucherabzweige in sicherungsfreier Bauweise", Order No. E20001-P285-A726 (available in German only).



Contactors and Contactor Assemblies

Accessories for 3RT / 3RH Contactors


Solid-state, time-delay auxiliary switch box

The timer module, which is available in "ON-delay" and "OFF-delay" designs, allows time-delayed functions up to 100 s (3 distinct delay ranges).

It contains a relay with one NO contact and one NC contact; the relay is switched either after an ON-delay or after an OFF-delay.

The timer module with a WYE-DELTA function is equipped with one delayed and one instantaneous NO contact, with an interval time of 50 ms between the two (see diagram). The delay time of the NO contact can be set between 1.5 s and 30 s.

WYE-delta function



The timer module, which is available in "ON-delay" and "OFF-delay" with auxiliary power supply designs, allows time-delayed functions up to 100 s (3 distinct delay ranges). Contactors fitted with a time-delay block close or open after a delay according to the set time.

The ON-delay variant of the time-delay relay is connected in series with the contactor coil; terminal A1 of this coil must not be connected.

With the OFF-delay variant of the time-delay relay, the contactor coil is contacted directly via the relay; terminals A1 and A2 of the coil must not be connected.

The time-delay relays are suitable for both AC and DC operation.

The contactor on which the solid-state, time-delay auxiliary switch block is mounted operates without a delay.

Size S00 (3RT201)

The solid-state, time-delay auxiliary switch block is fitted onto the front of the contactor. The timer module is supplied with power directly by plug-in contacts via the coil terminals of the contactor, in parallel with A1/A2. The time function is activated by closing the contactor on which the auxiliary switch block is mounted. The OFF-delay variant operates without an auxiliary power supply. Minimum ON period: 200 ms.

A varistor is integrated in the timer module for damping opening surges in the contactor coil.

The solid-state, time-delay auxiliary switch block cannot be mounted on size S00 coupling relays.

Sizes S0 to S12 (3RT202 to 3RT107)

The solid-state, time-delay auxiliary switch block is fitted onto the front of the contactor.

The timer module is supplied with power via two terminals (A1/A2); the time delay of the auxiliary switch block can be activated either by a parallel link to any contactor coil or by any power source.

The OFF-delay variant operates without an auxiliary power supply. Minimum ON period: 200 ms.

A single-pole auxiliary switch block can be snapped onto the front of the contactor in addition to the timer module.

The timer module has no integrated components for damping opening surges.

Solid-state time-delay block with semiconductor output

Sizes S0 to S3 (3RT202 to 3RT107)



The time-delay block for size S0 to S3 contactors is plugged into coil terminals A1 and A2 on top of each contactor; the time-delay relay is connected by means of plug-in contacts to coil terminals A1 and A2 of the contactor. Any contactor coil terminals which are not required are sealed off by means of covers on the enclosure of the time-delay block, to prevent them from being connected inadvertently (for circuit diagrams, see page 2/149).

A varistor is integrated in the timer module for damping opening surges in the contactor coil.

Configuration note

Activation of loads parallel to the start input is not permitted with AC operation (see ④).

The 3RT19 16-2D .../3RT19 26-2D ... time-delay blocks with an OFF delay have a voltage-carrying start input B1. This means that if there is a parallel load on terminal B1, activation can be simulated with AC voltage. In this case, the additional load (e.g. contactor K3) must be wired as shown in ⑥.



Time-delay block
Contactor



Contactors and Contactor Assemblies


Accessories for 3RT / 3RH Contactors

3-phase EMC interference suppression module for size S00 contactor

2

CONTACTORS AND ASSEMBLIES




A so-called backr-e.m.f. (electromotive force) is produced when motors or various inductive loads are turned off. Voltage peaks of up to 4 000 V may occur as a result, with a frequency spectrum from 1 kHz to 10 MHz and a rate of voltage variation from 0.1 to 20 V/ns.



The connection between the main conducting path and the EMC interference suppression module enables contact arcing, which is responsible for contact erosion and the majority of clicking noises, to be reduced; this in turn is conducive to an electromagnetically compatible design.

Since the EMC interference suppression module achieves a significant reduction in radio-frequency components and the voltage level in three phases, the contact endurance is also improved considerably. This makes an important contribution towards enhancing the reliability and availability of the system as a whole.

There is no need for fine graduations within each performance class, as smaller motors inherently have a higher inductance, so that one solution for all fixed-speed drives up to 7.5 HP is adequate.

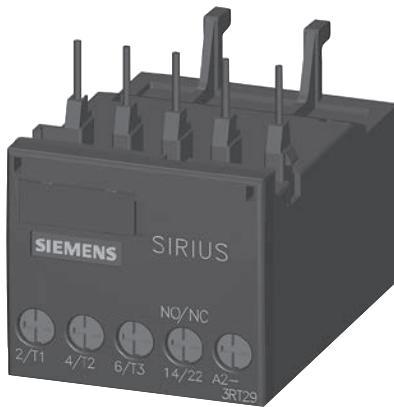

Two electrical variants are available:

The advantages of the RC circuit lie mainly in the reduction in the rate of rise and in its RF damping ability. The selected values ensure effective interference suppression over a wide range.

The varistor circuit is able to absorb high energy levels and is also suitable for frequencies from 10 to 400 Hz (variable-speed drives). There is no limiting below the knee-point voltage, however.

OFF-delay device for size S00 to S3 contactors

AC and DC operation

IEC 60 947, EN 60 947

For screwing and snapping onto 35 mm standard mounting rail. The OFF-delay devices have screw connections.

Application

The OFF-delay device prevents a contactor from dropping out unintentionally when there is a short-time voltage dip or voltage failure. It supplies the necessary power for a series-connected, DC-operated contactor during a voltage dip to ensure that the

contactor does not open. The 3RT19 16/3RT29 16 OFF-delay devices are specifically designed for operation with the 3RT contactors and 3RH contactor relays of the SIRIUS series.

Principle of operation

The OFF-delay device operates without external voltage on a capacitive basis, and can be energized with either AC or DC (24 V version for DC operation only). Voltage matching, which is only necessary with AC operation, is performed using a rectifier bridge.

A contactor opens after a delay when the capacitors of the contactor coil, built into the OFF-delay device, are switched in parallel. In the event of voltage failures, the capacitors are discharged via the coil and thereby delay the opening of the contactor.

If the command devices are upstream of the OFF-delay device in the circuit, the OFF delay takes effect with every opening operation. If the opening operation is downstream of the OFF-delay device, an OFF delay only applies in the event of failure of the mains voltage.

Operation

In the case of the versions for rated control supply voltages of 110 V and 230 V, either AC voltage or DC voltage can be applied on the line side, where as the variant for 24 V is designed for DC operation only.

A DC-operated contactor is connected to the output in accordance with the input voltage that is applied.



The mean value of the OFF delay is approximately 1.5 times the specified minimum time.



Accessories for 3RT Contactors

Interface for mounting on size S0 to S3 contactors

Application	Functions
DC operation IEC 60 947 and EN 60 947 The interface is suitable for use in any climate. It is safe from touch to DIN VDE 0106 Part 100. The terminal designations conform to EN 50 005.	Design System-compatible operation with DC 24 V, coil voltage tolerance 17 V to 30 V. Low power consumption in conformity with the technical data of the electronic systems. A light-emitting diode indicates the circuit state.
Surge suppression The 3RH29 24-1GP11 interface has an integrated surge suppressor (varistor) for the contactor coil being switched.	Mounting The 3RH29 24-1GP11 interface is mounted directly on the contactor coil.
Terminal diagram 3RH19/29 24-1GP1 with surge suppression	Connection example 3RH19/29 24-1GP1 with surge suppression





Contactor Assemblies for Switching Motors

3RT2 contactors

2

CONTACTORS AND ASSEMBLIES

More information

Contactors	Type Size Width	3RT2 S00 and S0 45		
Rated data of the auxiliary contacts				
According to IEC 60947-5-1/EN 60947-5-1 The data apply to integrated auxiliary contacts and contacts in the auxiliary switch blocks for contactor sizes S00 to S0 ¹⁾				
Rated insulation voltage U_i (pollution degree 3)	V	690		
Conventional thermal current I_{th} = Rated operational current $I_e/AC-12$	A	10		
AC load				
Rated operational current $I_e/AC-15/AC-14$				
• For rated operational voltage U_e	24 V	10 ¹⁾		
	110 V	10 ¹⁾		
	125 V	10 ¹⁾		
	220 V	10 ¹⁾		
	230 V	10 ¹⁾		
	380 V	3		
	400 V	3		
	500 V	2		
	660 V	1		
	690 V	1		
DC load				
Rated operational current $I_e/DC-12$				
• For rated operational voltage U_e	24 V	6		
	60 V	6		
	110 V	3		
	125 V	2		
	220 V	1		
	440 V	0.3		
	600 V	0.15		
Rated operational current $I_e/DC-13$				
• For rated operational voltage U_e	24 V	6		
	60 V	2		
	110 V	1		
	125 V	0.9		
	220 V	0.3		
	440 V	0.14		
	600 V	0.1		
Contact reliability at 17 V, 1 mA acc. to EN 60947-5-4	Frequency of contact faults $<10^{-8}$ i. e. <1 fault per 100 million operating cycles			
Endurance of the auxiliary contacts				
It is assumed that the operating mechanisms are switched randomly, i. e. not synchronized with the phase angle of the supply system.				
The contact endurance is mainly dependent on the breaking current.				
The characteristic curves apply to:				
• Integrated auxiliary contacts on 3RT20				
• Auxiliary switch blocks 3RH 29 11, 3RH29 21 for contactors size S00 and S0.				
Diagram legend: I_a = Breaking current I_e = Rated operational current				

¹⁾ Integrated auxiliary contacts in size S0, auxiliary switches for snapping onto the front and for mounting onto the side in size S00 and S0: $I_e = 6$ A at AC-14/AC-15.



Endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching resistive and inductive AC loads (AC-1/AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i. e. not synchronized with the phase angle of the supply system.

The rated operational current I_e complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of at least 200,000 operating cycles.

If a shorter endurance is sufficient, the rated operational current I_e /AC-4 can be increased. I_e

If the contacts are used for mixed operation, i. e. normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4), the contact endurance can be calculated approximately from the following equation:

$$X = \frac{A}{1 + \frac{C}{100} \left(\frac{A}{B} - 1 \right)}$$

Characters in the equation:

X Contact endurance for mixed operation in operating cycles


A Contact endurance for normal operation ($I_a = I_e$) in operating cycles

B Contact endurance for inching ($I_a = \text{multiple of } I_e$) in operating cycles

C Inch operations as a percentage of total switching operations

Size S00

Operating cycles at

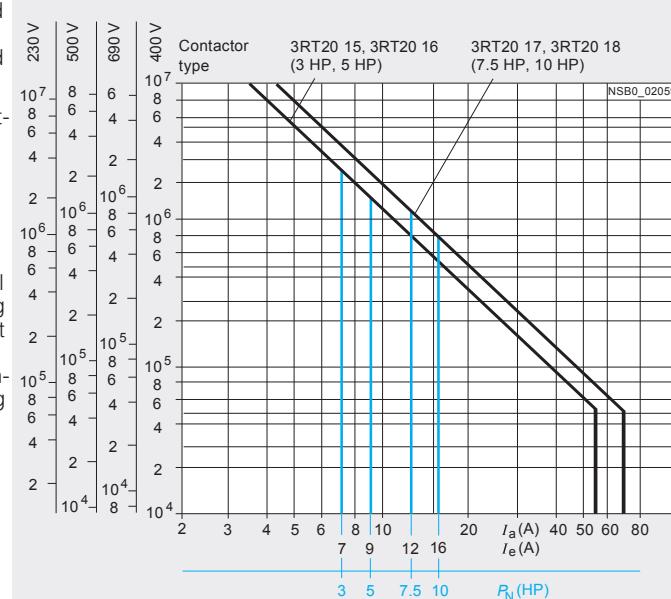

Size S0

Operating cycles at

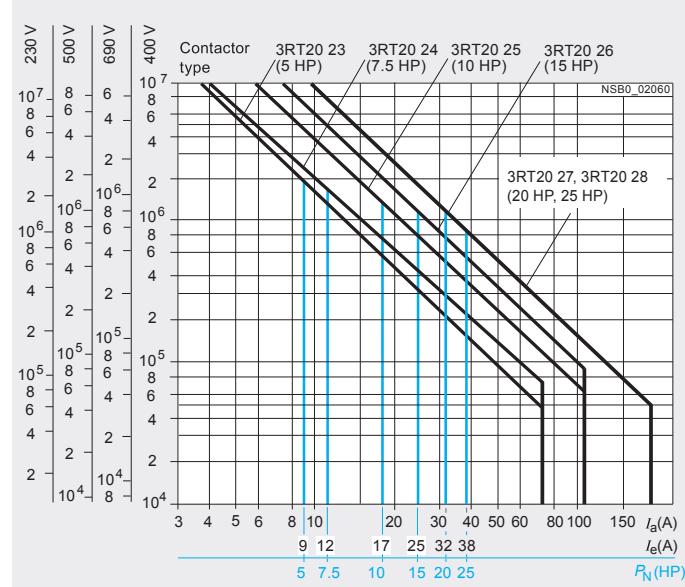


Diagram legend:

P_N = Rated power for squirrel-cage motors at 460 V

I_a = Breaking current

I_e = Rated operational current



Contactors and Contactor Assemblies

Contactors for Switching Motors


3RT contactors

Technical data

Endurance of the main contacts


Size S2

Operating cycles at

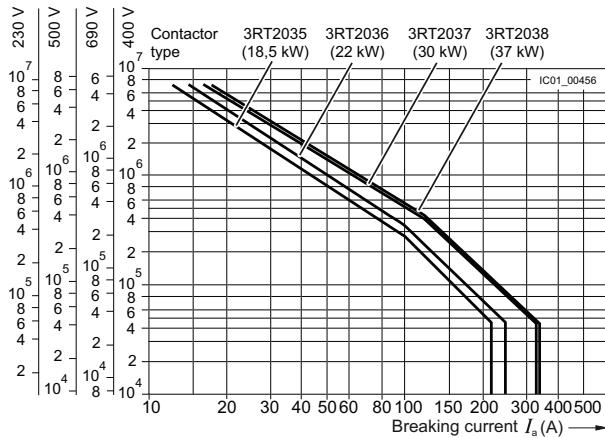


Size S3

Operating cycles at

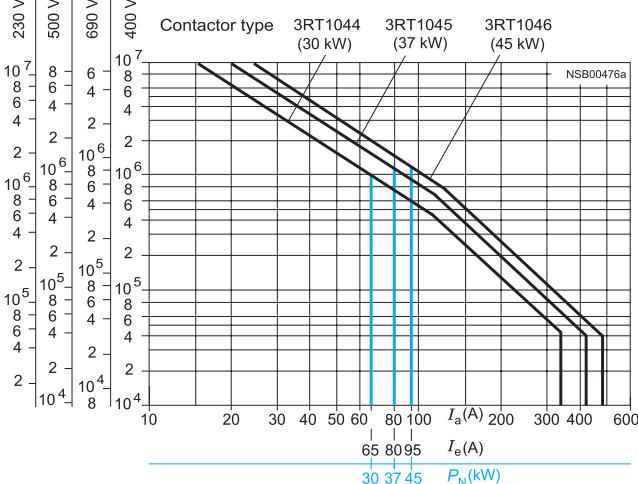

Sizes S6 to S12


Operating cycles at

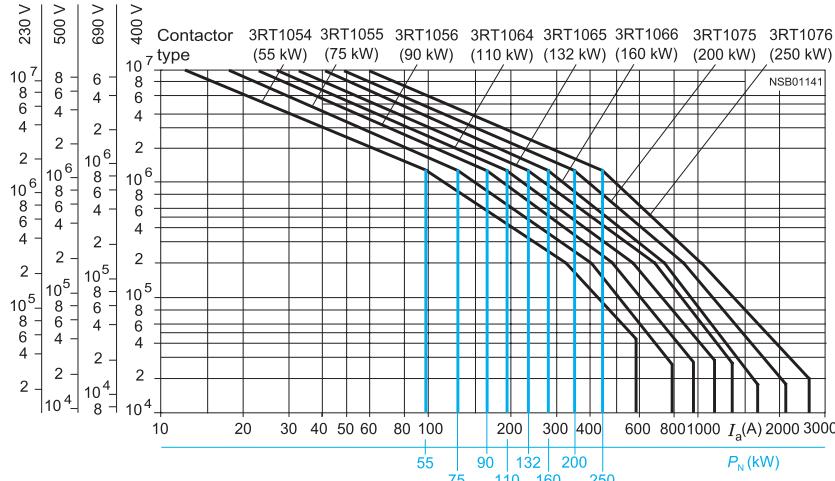

3RT12 vacuum contactors

Sizes S10 and S12

Operating cycles at

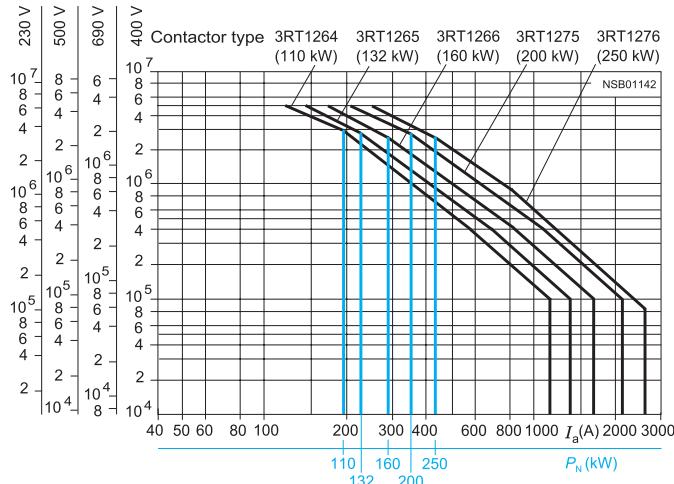

Legend:
 P_N = Ratings of three-phase motors with squirrel-cage rotor at 400 V
 I_a = Breaking current
 I_e = Rated operational current



Contactors for Switching Motors

3RT2 contactors

Contactors	Type	3RT20 15	3RT20 16	3RT20 17	3RT20 18		
	Size	S00	S00	S00	S00		
	Width	mm	45	45	45		
① and ④ rated data							
Rated insulation voltage		V AC 600					
Uninterrupted current, at 40 °C		• Open and enclosed A 20					
Maximum horsepower ratings (① and ④ approved values)							
• Rated power for induction motors at 60 Hz		At 200 V hp	1.5	2	3	3	
		230 V hp	2	3	3	5	
		460 V hp	3	5	7.5	10	
		575 V hp	5	7.5	10	10	
Short-circuit protection¹⁾ (contactor or overload relay)		At 600 V kA	5	5	5	5	
		• Fuse CLASS J ²⁾	A	40	40	40	
		• Circuit breakers with overload protection according to UL 489	A	50	50	50	
• Combination motor controllers type E according to UL 508			-- ³⁾	-- ³⁾	-- ³⁾	-- ³⁾	
NEMA/EEMAC ratings							
NEMA/EEMAC size		-- 0					
• Uninterrupted current		- Open A	--	18			
		- Enclosed A	--	18			
• Rated power for induction motors at 60 Hz		At 200 V hp	--	3			
		230 V hp	--	3			
		460 V hp	--	5			
		575 V hp	--	5			
Overload relays		• Type	3RU21 1 / 3RB30 1				
		• Setting range	A 0.11 ... 16 / 0.1 ... 16				
Contactors	Type	3RT20 23	3RT20 24	3RT20 25	3RT20 26	3RT20 27	3RT20 28
	Size	S0	S0	S0	S0	S0	S0
	Width	mm	45	45	45	45	45
① and ④ rated data							
Rated insulation voltage		V AC 600					600
Uninterrupted current, at 40 °C		• Open and enclosed A 35					42
Maximum horsepower ratings (① and ④ approved values)							
• Rated power for induction motors at 60 Hz		At 200 V hp	2	3	5	7.5	10
		230 V hp	3	3	5	7.5	10
		460 V hp	5	7.5	10	15	20
		575 V hp	7.5	10	15	20	25
Short-circuit protection¹⁾ (contactor or overload relay)		At 600 V kA	5	5	5	5	5
		• Fuse CLASS J ²⁾	A	45	45	70	110
		• Circuit breakers with overload protection according to UL 489	A	70	70	100	100
• Combination motor controllers type E according to UL 508		- At 480 V	Type A	3RV20 2			
			kA	-- ³⁾			
		- At 600 V	Type A	3RV20 2			
			kA	-- ³⁾			
NEMA/EEMAC ratings							
NEMA/EEMAC size		-- 1					
• Uninterrupted current		- Open A	--	27			
		- Enclosed A	--	27			
• Rated power for induction motors at 60 Hz		At 200 V hp	--	7.5			
		230 V hp	--	7.5			
		460 V hp	--	10			
		575 V hp	--	10			
Overload relays		• Type	3RU21 2 / 3RB30 2				
		• Setting range	A 1.8 ... 40 / 0.1 ... 40				

¹⁾ For more information about short-circuit values, e. g. for protection against short-circuit currents, see [UL reports](#) (<http://support.automation.siemens.com>) for the individual devices.

²⁾ Values for RK5 fuses on request.

³⁾ Values on request.



Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT20 contactors

2

CONTACTORS AND ASSEMBLIES

S and U ratings of the contactors		Size Type	S2 3RT20 35	S2 3RT20 36	S2 3RT20 37	S2 3RT20 38	S3 3RT20 45	S3 3RT20 46	S3 3RT20 47
Contactor	Size Type								
Rated Insulation Voltage	AC V	600					600		
Continuous current, at 40 °C									
Free air and enclosed	A	55	60	80	90	90	105		
Maximum horsepower ratings	Ratings single phase motors at 50/60 Hz	at 115 V hp	3	3	5	5	5	7.5	10
		at 230 V hp	7.5	10	10	15	15	15	-
S and U approved values									
Ratings of three-phase motors at 50/60 Hz	at 200 V hp	10	15	20	20	20	25	30	
	230 V hp	15	15	20	25	25	30	30	
	460 V hp	30	40	50	50	50	60	75	
	575 V hp	40	50	50	60	60	75	100	
Short-circuit protection	Fuse or circuit-breaker acc. to UL 489	kA A A	5 150 150	10 200 200	10 250 200	10 250 200	5 250 250	10 300 300	10 350 400
NEMA/EEMAC ratings	NEMA/EEMAC Size			2			-		3
Conventional thermal current	Free air Enclosed	A A	- -	45 45	- -	- -	- -		90 90
Ratings of three-phase motors at 60 Hz	at 200 V hp	-	10	-	-	-	-		25
	230 V hp	-	15	-	-	-	-		30
	460 V hp	-	25	-	-	-	-		50
	575 V hp	-	25	-	-	-	-		50
Overload Relay	Type Setting Range	A	3RU213 / 3RB303 11 ... 80 / 12 ... 80				3RU11 4 18 ... 100		
Contactor Size			S00 - S0 Screw and Spring connection Integrated or snap-on aux. switch block		Screw and Spring connection Laterally mountable aux. switch block		S2 - S12 Screw and Spring connection Single pole and 4-pole Snap-on aux. switch block		Screw and Spring con- nection Laterally mountable aux. switch block
S and U ratings of the auxiliary contactors									
Rated Voltage	AC	600		600		600		600	
Switching Capacity Uninterrupted current	At 240 VAC	A	A 600, P 600 10		A 600, Q 600 10		A 600, P 300 10		A 300, Q 300 10



Contactors for Switching Motors

3RT10 contactors

Technical data

Contactor	Size Type		S6 3RT10 54	S6 3RT10 55	S6 3RT10 56	S10 3RT10 64	S10 3RT10 65	S10 3RT10 66
© and ® ratings of the contactors								
Rated insulation voltage		AC V	600			600		
Continuous current, at 40 °C	Free air and enclosed	A	140	195	195	250	330	330
Maximum horsepower ratings (© and ®-approved values)	Ratings single phase motors at 50/60 Hz	at 115 V 230 V HP	25	30	30			
Ratings of three-phase motors at 50/60 Hz	200 V 230 V 460 V 575 V	HP HP HP HP	40 50 100 125	50 60 125 150	60 75 150 200	60 75 150 200	75 100 200 250	100 125 250 300
Short-circuit protection	CLASS RK5 fuse Circuit-breaker acc. to UL 489	KA A	10 450	10 500	10 500	10 700	18 800	18 800
NEMA/EEMAC ratings	NEMA/EEMAC SIZE		–	4	–	–	–	5
Conventional thermal current	Free air Enclosed	A A	– –	150 135	– –	– –	– –	300 270
Ratings of three-phase motors at 60 Hz	at 200 V 230 V 460 V 575 V	HP HP HP HP	– – – –	40 50 100 100	– – – –	– – – –	– – – –	75 100 200 200
Overload relay	Type		3RB20 56		3RB20 66			

Contactor	Size Type		S12 3RT10 75	S12 3RT10 76
Rated insulation voltage				
Continuous current, at 40 °C	Free air and enclosed	A	400	540
Maximum horsepower ratings (© and ®-approved values)				
Ratings of three-phase motors at 50/60 Hz	at 200 V 230 V 460 V 575 V	HP HP HP HP	125 150 300 400	150 200 400 500
Short-circuit protection	CLASS RK5 fuse Circuit-breaker acc. to UL 489	KA A	18 1000	30 1200
NEMA/EEMAC ratings	NEMA/EEMAC SIZE		–	6
Conventional thermal current	Free air Enclosed	A A	– –	600 540
Ratings of three-phase motors at 60 Hz	at 200 V 230 V 460 V 575 V	HP HP HP HP	– – – –	150 200 400 400
Overload relay	Type		3RB20 66	



Contactors for Switching Motors

3RT12 vacuum contactors, 3RT contactors for resistive loads

2

CONTACTORS AND ASSEMBLIES

Technical data

Contactor	Size Type	S10 3RT12 64	S10 3RT12 65	S10 3RT12 66	S12 3RT12 75	S12 3RT12 76
© and ℗ ratings of the contactors						
Rated insulation voltage	AC V	600			600	
Continuous current, at 40 °C	Free air and enclosed	A	330		540	
Maximum horsepower ratings (© and ℗-approved values)						
Ratings of three-phase motors at 50/60 Hz	at 200 V 230 V 460 V 575 V	HP HP HP HP	60 75 150 200	75 100 200 250	100 125 250 300	125 150 300 400
Short-circuit protection	CLASS RK5 fuse Circuit-breaker acc. to UL 489	kA A	10 700	18 800	18 800	18 1200
NEMA/EEMAC ratings	NEMA/EEMAC SIZE		—	5	—	6
Conventional thermal current	Free air Enclosed	A A	— —		— —	
Ratings of three-phase motors at 60 Hz	at 200 V 230 V 460 V 575 V	HP HP HP HP	— — — —		— — — —	
Overload relay	Type		3RB20 66		3RB20 66	
Contactor	Size Type	S3 3RT14 46	S6 3RT14 56	S10 3RT14 66	S12 3RT14 76	
Rated insulation voltage	AC V	600				
Maximum UL resistive load ratings	A	110	210	360	580	


Contactor	Size Type	S00 3RT23 15	S00 3RT23 16	S00 3RT23 17	S0 3RT23 24	S0 3RT23 25	S0 3RT23 26	S0 3RT23 27	S2 3RT23 36	S3 3RT13 44	S3 3RT13 46
Rated insulation voltage	AC V	600									
Maximum UL resistive load ratings	A	16	18	20	30	30	35	42	60	100	110



Contactors for Switching Motors

3RT2. 1. contactors

Type	
Size	
Dimensions (W x H x D) ¹⁾	
• With mounted auxiliary switch block	mm
• With mounted function block	mm
	mm



3RT20 15, 3RT20 16

S00

45 x 57.5 x 73 / 45 x 70 x 73

45 x 57.5 x 116 / 45 x 70 x 121

45 x 57.5 x 142 / 45 x 70 x 142

3RT20 17, 3RT20 18


S00

General data

Permissible mounting positions

The contactors are designed for operation on a vertical mounting surface.

AC and DC operation



Special design required.
Positions 13 to 16 of the Order No. must be changed to **-1AA0**. Additional charge.

NSBO_00477a

Mechanical endurance

- Basic unit

Operating cycles

30 million

- Basic unit with snap-on auxiliary switch block

Operating cycles

10 million

- Solid-state compatible auxiliary switch block

Operating cycles

5 million

Electrical endurance

2)

Rated insulation voltage U_i (pollution degree 3)

V

690

Rated impulse withstand voltage U_{imp}

kV

6

Protective separation between the coil and the main contacts acc. to EN 60947-1, Appendix N

V

400

Mirror contacts

A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact.

- 3RT20 1., 3RT23 1. (removable auxiliary switch block)
- 3RT20 1., 3RT23 1. (permanently mounted auxiliary switch block)
- 3RH29 19-.NF.. solid-state compatible auxiliary switch blocks have no mirror contacts.

Yes, this applies to both the basic unit as well as to between the basic unit and the mounted auxiliary switch block acc. to EN 60947-4-1, Appendix F
Yes, acc. to EN 60947-4-1, Appendix F

Ambient temperature

- During operation

°C

-25 ... +60

- During storage

°C

-55 ... +80

Protection class IP on the front acc. to IEC 60529

IP20, coil assembly IP40

Touch protection on the front acc. To IEC 60529

Finger-safe, for vertical contact from the front
(screw and spring-type terminal)

Shock resistance rectangular pulse

- AC operation

g/ms

6.7/5 and 4.2/10

7.3/5 and 4.7/10

- DC operation

g/ms

6.7/5 and 4.2/10

7.3/5 and 4.7/10

Shock resistance sine pulse

- AC operation

g/ms

10.5/5 and 6.6/10

11.4/5 and 7.3/10

- DC operation

g/ms

10.5/5 and 6.6/10

11.4/5 and 7.3/10

Conductor cross-sections

3)

Short-circuit protection for contactors without overload relays

For short-circuit protection for contactors with overload relays
see Section 3: Overload Relays

For short-circuit protection for fuseless load feeders
see Section 4: Combination Starters

Main circuit

- Fuse links, operational class gG :

NH 3NA, DIAZED 5SB, NEOZED 5SE acc. to IEC 60947-4-1 / EN 60947-4-1

- Type of coordination "1"

A

35

50

- Type of coordination "2"

A

20

25

- Weld-free⁴⁾

A

10

10

- Miniature circuit breakers (up to 230 V) with C characteristic

Short-circuit current 1 kA, type of coordination "1"

A

10

10

Auxiliary circuit

- Fuse links, operational class gG : DIAZED 5SB, NEOZED 5SE (weld-free protection for $I_k \geq 1$ kA)

A

10

- Miniature circuit breakers up to 230 V with C characteristic

Short-circuit current $I_k < 400$ A

A

6

¹⁾ Dimensions for devices with screw terminals / spring-type terminals.

³⁾ For conductor cross-sections see page 2/137 .

²⁾ For endurance of the main contacts see page 2/129.

⁴⁾ Test conditions according to IEC 60947-4-1.



Contactors for Switching Motors

3RT2. 1. contactors

Contactors	Type Size Width	mm	3RT20 15, 3RT20 16 S00 45	3RT20 17, 3RT20 18 S00 45
Control				
Solenoid coil operating range				
• AC operation	50 Hz 60 Hz		0.8 ... 1.1 x U_s 0.85 ... 1.1 x U_s	
• DC operation	Up to 50 °C Up to 60 °C		0.8 ... 1.1 x U_s 0.85 ... 1.1 x U_s	
Power consumption of the solenoid coils (when coil is cold and 1.0 x U_s)				
• AC operation, 50/60 Hz, standard version	- Closing - P.f. - Closed - P.f.	VA	27/24.3 0.8/0.75 4.2/3.3 0.25/0.25	37/33 0.8/0.75 5.7/4.4 0.25/0.25
• AC operation, 50 Hz, USA/Canada	- Closing - P.f. for closing - Closed - P.f. for closed	VA	26.4 0.81 4.4 0.24	36 0.8 5.9 0.24
• AC operation, 60 Hz, USA/Canada	- Closing - P.f. for closing - Closed - P.f. for closed	VA	31.7 0.81 4.8 0.25	43 0.8 6.5 0.25
• DC operation	Closing = Closed	W	4	4
Permissible residual current of the electronics (with 0 signal)				
	• AC operation		<3 mA x (230 V/ U_s) ¹⁾	<4 mA x (230 V/ U_s) ¹⁾
	• DC operation		<10 mA x (24 V/ U_s) ¹⁾	
Operating times ²⁾				
Total break time = Opening delay + Arcing time				
• AC operation at 0.8 ... 1.1 x U_s	- Closing delay - Opening delay	ms	9 ... 35 3.5 ... 14	8 ... 33 4 ... 15
• DC operation at 0.85 ... 1.1 x U_s	- Closing delay - Opening delay	ms	30 ... 100 7 ... 13	30 ... 100 7 ... 13
• Arcing time		ms	10 ... 15	10 ... 15
Operating times for 1.0 x U_s ²⁾				
• AC operation	- Closing delay - Opening delay	ms	9.5 ... 24 4 ... 14	9 ... 22 4.5 ... 15
• DC operation	- Closing delay - Opening delay	ms	35 ... 50 7 ... 12	35 ... 50 7 ... 12

¹⁾ The 3RT29 16-1GA00 additional load module is recommended for higher residual currents.

²⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assemblies 2 to 6 times, varistor +2 to 5 ms).

Contactors	Type Size	3RT20 15 S00	3RT20 16 S00	3RT20 17 S00	3RT20 18 S00
Main circuit					
AC capacity					
Utilization category AC-1					
• Utilization category AC-1					
• Utilization category AC-3					
Switching resistive loads					
• Rated operational current I_e	At 40 °C up to 690 V At 60 °C up to 690 V	A	18 16	22 20	22 20
• Rated power for AC loads ¹⁾ P.f.= 0.95 (at 60 °C)	230 V 400 V 500 V 690 V	kW	6.3 11 13.8 19	7.5 13 17 22	7.5 13 17 22
• Minimum conductor cross-section for loads with I_e	At 40 °C At 60 °C	mm ²	2.5 2.5	2.5 2.5	2.5 2.5
Utilization category AC-3					
• Rated operational currents I_e	Up to 400 V 440 V 500 V 690 V	A	7 7 6 4.9	9 9 7.7 6.7	12 11 9.2 6.7
• Rated power for slipring or squirrel-cage motors at 50 and 60 Hz	At 200 V 230 V 460 V 575 V	HP	1.5 2 3 5	2 3 5 7.5	3 3 7.5 10
Thermal load capacity					
10 s current ²⁾	A	56	72	96	128

¹⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

²⁾ According to IEC 60947-4-1.
For rated values for various start-up conditions see Section 3 --> "Overload Relays".



Contactors for Switching Motors

3RT2. 1. contactors

Contactors	Type Size Width	mm	3RT20 15 S00 45	3RT20 16 S00 45	3RT20 17 S00 45	3RT20 18 S00 45
Main circuit						
AC capacity						
Power loss per conducting path	At $I_e/AC-3$	W	0.42	0.7	1.24	2.2
Utilization category AC-4 (for $I_a = 6 \times I_e$) ¹⁾						
• Rated operational current I_e	Up to 400 V	A	6.5	8.5	8.5	11.5
• Rated power for squirrel-cage motors with 50 Hz and 60 Hz	Up to 400 V	kW	3	4	4	5.5
• The following applies to a contact endurance of about 200000 operating cycles:						
- Rated operational currents I_e	Up to 400 V	A	2.6	4.1	4.1	5.5
	690 V	A	1.8	3.3	3.3	4.4
- Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 230 V	kW	0.67	1.1	1.1	1.5
	400 V	kW	1.15	2	2	2.5
	500 V	kW	1.45	2	2	3
	690 V	kW	1.15	2.5	2.5	3.5

Switching frequency**Switching frequency z** in operating cycles/hour

• Contactors without overload relays	No-load switching frequency AC	h ⁻¹	10000
Dependence of the switching frequency z' on the operational current I' and operational voltage U': $z' = z \cdot (I_e/I') \cdot (400 V/U')^{1.5} \cdot 1/h$	No-load switching frequency DC	h ⁻¹	10000
	Rated operation		
	AC-1 (AC/DC)	h ⁻¹	1000
	AC-2 (AC/DC)	h ⁻¹	750
	AC-3 (AC/DC)	h ⁻¹	750
	AC-4 (AC/DC)	h ⁻¹	250
• Contactors with overload relays (mean value)		h ⁻¹	15

¹⁾ The data only apply to 3RT25 16 and 3RT25 17 (2 NO + 2 NC) up to a rated operational voltage of 400 V.

Contactors	Type Size	mm	3RT20 15 S00 45	3RT20 16 S00 45	3RT20 17 S00 45	3RT20 18 S00 45
------------	--------------	----	-----------------------	-----------------------	-----------------------	-----------------------

Conductor cross-sections**Main conductors and auxiliary conductors**
(1 or 2 conductors can be connected)

• Solid	mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾ according to IEC 60947; max. 2 x (0.5 ... 4)
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) ¹⁾ ; 2 x (18 ... 14) ¹⁾ ; 2 x 12
• Terminal screw	Nm	M3 (for standard screwdriver size 2 and Pozidriv 2)
• Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)

Main conductors, auxiliary conductors and coil terminals

(1 or 2 conductors can be connected)

• Operating devices	mm	3.0 x 0.5; 3.5 x 0.5
• Solid	mm ²	2 x (0.5 ... 4)
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 2.5)
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 2.5)
• AWG cables, solid or stranded	AWG	1 x (20 ... 12)

Auxiliary conductors for front and laterally mounted auxiliary switches

(1 or 2 conductors can be connected)

• Operating devices	mm	3.0 x 0.5; 3.5 x 0.5
• Solid	mm ²	2 x (0.5 ... 2.5)
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5)
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 1.5)
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)

Main conductors and auxiliary conductors

- Terminal screw
- Operating devices
- Tightening torque
- Usable ring terminal lugs
 - DIN 46234 without insulation sleeve
 - DIN 46225 without insulation sleeve
 - DIN 46237 with insulation sleeve
 - JIS C2805 Type R without insulation sleeve
 - JIS C2805 Type RAV with insulation sleeve
 - JIS C2805 Type RAP with insulation sleeve

**Ring lug terminal connection**

mm	M3, Pozidriv 2
Nm	Ø 5 ... 6
mm	0.8 ... 1.2
mm	d ₂ = min. 3.2
	d ₃ = max. 7.5

For tool for opening the spring-type terminals
(see Accessories on page 2/85).

Maximum external diameter of the conductor insulation: 3.6 mm.

An "insulation stop" must be used for conductor cross-sections $\leq 1 \text{ mm}^2$ (see Accessories on page 2/85).

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified.




Contactors for Switching Motors

3RT2. 2. contactors

2

CONTACTORS AND ASSEMBLIES

Type	3RT20 23	3RT20 24	3RT20 25	3RT20 26	3RT20 27	3RT20 28
Size	S0	S0	S0	S0	S0	S0
Dimensions (W x H x D) for AC operation ¹⁾	45 x 85 x 97 / 45 x 101.5 x 97					
• With mounted auxiliary switch block	mm	mm	mm	mm	mm	mm
• With mounted function block						
Dimensions (W x H x D) for DC operation ¹⁾	45 x 85 x 141 / 45 x 101.5 x 144					
• With mounted auxiliary switch block	mm	mm	mm	mm	mm	mm
• With mounted function block						
	45 x 85 x 166 / 45 x 101.5 x 166					
	45 x 85 x 107 / 45 x 101.5 x 107					
	45 x 85 x 151 / 45 x 101.5 x 154					
	45 x 85 x 176 / 45 x 101.5 x 176					



General data											
Permissible mounting positions											
The contactors are designed for operation on a vertical mounting surface.											
Upright mounting position											
AC and D operation											
Mechanical endurance											
• Basic unit	Operating cycles	10 million									
• Basic unit with snap-on auxiliary switch block	Operating cycles	10 million									
• Solid-state compatible auxiliary switch block	Operating cycles	5 million									
Electrical endurance	2)										
Rated insulation voltage U_i (pollution degree 3)	V	690									
Rated impulse withstand voltage U_{imp}	kV	6									
Protective separation between the coil and the main contacts (acc. to EN 60947-1, Appendix N)	V	400									
Mirror contacts											
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact.											
• 3RT20 2., 3RT23 2. (removable auxiliary switch block)	Yes, acc. to EN 60947-4-1, Appendix F										
• 3RT20 2., 3RT23 2. (permanently mounted auxiliary switch block)	Yes, acc. to EN 60947-4-1, Appendix F										
Permissible ambient temperature											
• During operation	°C	-25 ... +60									
• During storage	°C	-55 ... +80									
Protection class IP on the front acc. to IEC 60529	IP20, coil assembly IP20										
Touch protection on the front acc. to IEC 60529	Finger-safe, for vertical contact from the front (screw and spring-type terminal)										
Shock resistance rectangular pulse											
• AC operation	g/ms	7.5/5 and 4.7/10									
• DC operation	g/ms	>10/5 and 7.5/10									
Shock resistance sine pulse											
• AC operation	g/ms	11.8/5 and 7.4/10									
• DC operation	g/ms	>15/5 and >10/10									
Conductor cross-sections	3)										
Short-circuit protection for contactors without overload relays											
Main circuit											
• Fuse links, operational class gG : Type NH 3NA, DIAZED 5SB, NEOZED 5SE acc. to IEC 60947-4-1/ EN 60947-4-1	For short-circuit protection for contactors with overload relays see "Protection Equipment -> Overload Relays".										
- Type of coordination "1"	A	63									
- Type of coordination "2"	A	25									
- Weld-free ⁴⁾	A	10									
• Miniature circuit breakers with C characteristic (short-circuit current 3 kA, type of coordination "1")	A	25									
Auxiliary circuit											
• Fuse links, operational class gG : DIAZED 5SB, NEOZED 5SE (weld-free protection for $I_k \geq 1$ kA)	A	100									
• Miniature circuit breaker with C characteristic (short-circuit current $I_k < 400$ A)	A	35									
	A	16									
	A	32									
	A	40									

¹⁾ Dimensions for devices with screw terminals / spring-type terminals.²⁾ For endurance of the main contacts see page 2/129.³⁾ For conductor cross-sections page 2/141.⁴⁾ Test conditions according to IEC 60947-4-1.



Contactors for Switching Motors

3RT20.2. contactors

Contactors	Type	3RT20 23 ... 3RT20 25	3RT20 26 ... 3RT20 28	3RT20 2. -NB3	3RT20 2. -NF3..	3RT20 2. -NP3				
Size	S0	S0	S0	S0	S0	S0				
Width	mm	45	45	45	45	45				
Control										
Solenoid coil operating range		AC/DC								
Power consumption of the solenoid coils (when coil is cold and $1.0 \times U_s$)		0.8 ... 1.1 $\times U_s$								
• AC operation, 50 Hz, standard version	- Closing	VA	65	77	6.5	13.6				
	- P.f.		0.82	0.82	0.98	0.98				
	- Closed	VA	7.6	9.8	1.26	1.91				
	- P.f.		0.25	0.25	0.25	0.25				
• AC operation, 50/60 Hz, standard version	- Closing	VA	68/67	81/79	6.5/5.7	13.6/13.2				
	- P.f.		0.72/0.74	0.72/0.74	0.98/0.96	0.98/0.99				
	- Closed	VA	7.9/6.5	10.5/8.5	1.26/1.30	1.91/1.90				
	- P.f.		0.25/0.28	0.25/0.28	0.78/0.8	0.61/0.61				
• AC operation, 50 Hz, USA/Canada	- Closing	VA	65	77	--	--				
	- P.f.		0.82	0.82	--	--				
	- Closed	VA	7.6	9.8	--	--				
	- P.f.		0.25	0.28	--	--				
• AC operation, 60 Hz, USA/Canada	- Closing	VA	73	87	--	--				
	- P.f.		0.76	0.76	--	--				
	- Closed	VA	7.2	9.4	--	--				
	- P.f.		0.28	0.28	--	--				
• DC operation	Closing/closed	W	5.9/5.9	5.9/5.9	6.7/0.8	13.2/1.56				
Permissible residual current of the electronics (with 0 signal)										
• AC operation	• AC operation	mA	< 6 mA \times (230 V/ U_s)							
	• DC operation	mA	< 16 mA \times (24 V/ U_s)							
Operating times for $0.8 \dots 1.1 \times U_s$¹⁾										
Total break time = Opening delay + Arcing time										
• AC operation	- Closing delay	ms	9 ... 38	8 ... 40	60 ... 80	50 ... 70				
	- Opening delay	ms	4 ... 16	4 ... 16	30 ... 45	35 ... 45				
• DC operation	- Closing delay	ms	50 ... 170	50 ... 170	60 ... 75	50 ... 70				
	- Opening delay	ms	15 ... 17.5	15 ... 17.5	30 ... 45	35 ... 45				
• Arcing time		ms	10	10	10	10				
Operating times for $1.0 \times U_s$¹⁾										
• AC operation	- Closing delay	ms	10 ... 18	10 ... 17	65 ... 80	50 ... 70				
	- Opening delay	ms	4 ... 16	4 ... 16	30 ... 45	35 ... 45				
• DC operation	- Closing delay	ms	55 ... 80	55 ... 80	60 ... 80	56 ... 70				
	- Opening delay	ms	16 ... 17	16 ... 17	30 ... 45	35 ... 45				

¹⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (varistor +2 ms to 5 ms, diode assembly: 2 to 6 times).



Contactors for Switching Motors

3RT20 2. contactors

Contactors	Type	3RT20 23	3RT20 24	3RT20 25	3RT20 26	3RT20 27	3RT20 28
	Size	S0	S0	S0	S0	S0	S0
	Width	mm	45	45	45	45	45
Main circuit							
AC capacity							
Utilization category AC-1, switching resistive loads							
• Rated operational current I_e	At 40 °C up to 690 V	A	40			50	
	At 60 °C up to 690 V	A	35			42	
• Rated power for AC loads ¹⁾ P.f. = 0.95 (at 60 °C)	230 V	kW	13.3			15.5	
	400 V	kW	23			27.5	
	500 V	kW	29			35	
	690 V	kW	40			47.5	
• Minimum conductor cross-section for loads with I_e	At 40 °C	mm ²	10			10	
	At 60 °C	mm ²	10			10	
Utilization category AC-3							
• Rated operational currents I_e	Up to 400 V	A	9	12	17	25	32
	440 V	A	9	12	17	22	32
	500 V	A	9	12	17	18	32
	690 V	A	9	9	13	13	21
• Rated power for slipring or squirrel-cage motors at 50 and 60 Hz	At 230 V	HP	3	3	5	7.5	10
	460 V	HP	5	7.5	10	15	20
	575 V	HP	7.5	10	15	20	25
Thermal load capacity							
10 s current ²⁾ A							
Power loss per conducting path							
at $I_e/AC-3$ W							
Utilization category AC-4 (for $I_a = 6 \times I_e$)							
• Rated operational current I_e	Up to 400 V	A	8.5	12.5	15.5	15.5	22
• Rated power for squirrel-cage motors with 50 and 60 Hz	At 400 V	kW	4	5.5	7.5	7.5	11
• The following applies to a contact endurance of about 200000 operating cycles:							
- Rated operational currents I_e	Up to 400 V	A	4.1	5.5	7.7	9	12
	690 V	A	3.3	5.5	7.7	9	12
- Rated power for squirrel-cage motors with 50 and 60 Hz	At 110 V	kW	0.5	0.73	1	1.2	1.6
	At 230 V	kW	1.1	1.5	2	2.5	3.4
	400 V	kW	2	2.6	3.5	4.4	6
	500 V	kW	2	3.3	4.6	5.6	7.5
	690 V	kW	2.5	4.6	6	7.7	10.3
Switching frequency							
Switching frequency z in operating cycles/hour							
• Contactors without overload relays	No-load switching frequency AC	h ⁻¹	5000				
	No-load switching frequency DC	h ⁻¹	1500				
Dependence of the switching frequency z' on the operational current I' and operational voltage U' :	AC-1 (AC/DC)	h ⁻¹	1000				
$z' = z \cdot (I_e/I') \cdot (400 V/U')^{1.5} \cdot 1/h$	AC-2 (AC/DC)	h ⁻¹	1000		750		
	AC-3 (AC/DC)	h ⁻¹	1000		750		
	AC-4 (AC/DC)	h ⁻¹	300		250		
• Contactors with overload relays (mean value)		h ⁻¹	15				

¹⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

²⁾ According to IEC 60947-4-1.

For rated values for various start-up conditions see Section 3 --> "Overload Relays".



Contactors for Switching Motors

3RT20 2. contactors

Contactors	Type	3RT20 23	3RT20 24	3RT20 25	3RT20 26	3RT20 27	3RT20 28	
	Size	S0	S0	S0	S0	S0	S0	
	Width mm	45	45	45	45	45	45	
Conductor cross-sections (1 or 2 conductors connectable)								
Main conductors		Screw terminals						
Conductor cross-section		mm ²	2 x (1 ... 2.5) ¹⁾ ; 2 x (2.5 ... 10) ¹⁾ according to IEC 60947					
• Solid		mm ²	2 x (1 ... 2.5) ¹⁾ ; 2 x (2.5 ... 6) ¹⁾ ; 1 x 10					
• Finely stranded with end sleeve		mm ²	2 x (16 ... 12); 2 x (14 ... 8)					
• AWG cables, solid or stranded		AWG	M4 (Pozidriv size 2)					
• Terminal screws		Nm	2 ... 2.5 (18 ... 22 lb.in)					
- Tightening torque								
Auxiliary conductors		mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾ according to IEC 60947					
• Solid		mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾					
• Finely stranded with end sleeve		mm ²	2 x (20 ... 16) ¹⁾ ; 2 x (18 ... 14) ¹⁾ ; 1 x 12					
• Solid or stranded AWG (2 x)		AWG	M3					
• Terminal screws		Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)					
- Tightening torque								
Main conductors		Spring-type terminals						
• Operating devices		mm	3.0 x 0.5; 3.5 x 0.5					
• Solid		mm ²	2 x (1 ... 10)					
• Finely stranded with end sleeve		mm ²	2 x (1 ... 6)					
• Finely stranded without end sleeve		mm ²	2 x (1 ... 6)					
• AWG cables, solid or stranded		AWG	2 x (18 ... 8)					
Auxiliary conductors		mm ²	3.0 x 0.5; 3.5 x 0.5					
• Operating devices		mm ²	2 x (0.5 ... 2.5)					
• Solid		mm ²	2 x (0.5 ... 1.5)					
• Finely stranded with end sleeve		mm ²	2 x (0.5 ... 1.5)					
• Finely stranded without end sleeve		mm ²	2 x (0.5 ... 1.5)					
• AWG cables, solid or stranded		AWG	2 x (20 ... 14)					
Main conductors		Ring lug terminal connection						
• Terminal screw		mm	M4, Pozidriv size 2					
• Operating devices		mm	Ø 5 ... 6					
• Tightening torque		Nm	2 ... 2.5					
• Usable ring lug terminals		mm	$d_2 = \text{min. } 4.3$					
- DIN 46234 without insulation sleeve		mm	$d_3 = \text{max. } 12.2$					
- DIN 46225 without insulation sleeve								
- DIN 46237 with insulation sleeve								
- JIS C2805 Type R without insulation sleeve								
- JIS C2805 Type RAV with insulation sleeve								
- JIS C2805 Type RAP with insulation sleeve								
Auxiliary conductors		mm	M3, Pozidriv size 2					
• Terminal screw		mm	Ø 5 ... 6					
• Operating devices		Nm	0.8 ... 1.2					
• Tightening torque		mm	$d_2 = \text{min. } 3.2$					
• Usable ring terminal lugs		mm	$d_3 = \text{max. } 7.5$					

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified.

Contactors	Size	S00	S0	Screw or spring-type terminals
		Screw or spring-type terminals	Screw or spring-type terminals	Screw or spring-type terminals
Rated data of the auxiliary contacts				
Rated voltage	V AC	600	600	600
Switching capacity		A 600, Q 600	A 600, Q 600	A 300, Q 300
Uninterrupted current	• At 240 V AC	A	10	10



Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT203. contactors

2

CONTACTORS AND ASSEMBLIES

Type				
Size				
Dimensions (W x H x D)				
• With mounted auxiliary switch block ¹⁾	3RT2035	3RT2036	3RT2037	3RT2038
• With mounted function module ¹⁾	S2	S2	S2	S2
	mm	mm	mm	mm
	55 x 114 x 130	55 x 114 x 174 / 55 x 114 x 178	55 x 114 x 199 / 55 x 114 x 202	
General data				
Permissible mounting position				
The contactors are designed for operation on a vertical mounting surface.				
Upright mounting position				
	Special version required			
Mechanical endurance				
• Basic units	Operating cycles	10 million		
• Basic units with snap-on auxiliary switch block	Operating cycles	10 million		
• Solid-state compatible auxiliary switch block	Operating cycles	5 million		
		2)		
Electrical endurance				
Rated insulation voltage U_i (pollution degree 3)	V	690		
Rated impulse withstand voltage U_{imp}	kV	6		
Protective separation between the coil and the main contacts (acc. to IEC 60947-1, Appendix N)	V	400		
Mirror contacts				
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.				
• Integrated auxiliary switches	Yes, acc. to IEC 60947-4-1, Appendix F			
• 3RT202., 3RT232. (removable auxiliary switch block)	Yes, acc. to IEC 60947-4-1, Appendix F			
• 3RT202., 3RT232. (permanently mounted auxiliary switch block)	Yes, acc. to IEC 60947-4-1, Appendix F			
Permissible ambient temperature				
• During operation	°C	-25 ... +60		
• During storage	°C	-55 ... +80		
Protection class IP on the front acc. to IEC 60529	IP20			
Connection range	IP00/open (where applicable, use additional terminal covers)			
Touch protection on the front acc. To IEC 60529	Finger-safe, for vertical contact from the front (screw and spring-type terminal)			
Shock resistance rectangular pulse				
• AC operation	g/ms	11.8/5 and 7.4/10		
• AC/DC operation	g/ms	7.7/5 and 4.5/10		
Shock resistance sine pulse				
• AC operation	g/ms	18.5/5 and 11.6/10		
• AC/DC operation	g/ms	12/5 and 7/10		
Conductor cross-sections				
Short-circuit protection				
Main circuit				
• Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1	Short-circuit protection for contactors with overload relays See Configuration Manual "Configuring SIRIUS Innovations" ⁴⁾ Short-circuit protection for fuseless load feeders See Chapter 8, "Load Feeders and Motor Starters for Use in the Control Cabinet" → "SIRIUS 3RA2 Load Feeders"			
- Type of coordination "1" - Type of coordination "2" - Weld-free ⁵⁾	A A A	160 80 On request	160 80 125	250 125 160
Auxiliary circuit				
• Fuse links, operational class gG: DIAZED, type 5SB; NEOZED, type 5SE (weld-free protection $I_k \leq 1 \text{ kA}$)	A	10		
• Miniature circuit breakers 230 V, C characteristic (short-circuit current $I_k < 400 \text{ A}$)	A	10		

¹⁾ Dimensions for devices with screw terminals / spring-type terminals.

²⁾ For contact endurance of the main contacts, see page 3/17.

³⁾ For conductor cross-sections, see page 3/28.

⁴⁾ See <http://support.automation.siemens.com/WW/view/en/39714188>

⁵⁾ Test conditions according to IEC 60947-4-1.



Contactors for Switching Motors

3RT20.3. contactors

Type	3RT2035	3RT2036	3RT2037	3RT2038	
Size	S2	S2	S2	S2	
Control					
Type of operating mechanism		AC			
Solenoid coil operating range		0.8 ... 1.1 x U_s	0.8 ... 1.1 x U_s	0.8 ... 1.1 x U_s	0.8 ... 1.1 x U_s
• AC operation, 50 Hz	--	0.85 ... 1.1 x U_s	0.8 ... 1.1 x U_s	0.8 ... 1.1 x U_s	0.8 ... 1.1 x U_s
• AC operation, 60 Hz	--	--	--	--	--
• DC operation	--	--	--	--	0.8 ... 1.1 x U_s
Power consumption of the solenoid coils (for cold coil and 1.0 x U_s)					
• AC operation, 50 Hz, standard version	- Closing - P.f. - Closed - P.f.	VA 0.72 VA 0.37	190 --	--	
• AC operation, 50/60 Hz, standard version	- Closing - P.f. - Closed - P.f.	VA -- VA --	210/188 0.69/0.65 17.2/16.5 0.36/0.39	-- -- -- --	
• AC operation, 50/60 Hz, for USA/Canada	- Closing - P.f. - Closed - P.f.	VA -- VA --	-- 0.67/0.65 18.516.5 0.37/0.39	212/188 -- -- --	
• AC/DC operation	- Closing for AC operation - P.f. - Closed for AC operation - P.f. - Closing for DC operation - Closed for DC operation	VA -- VA -- W W	-- -- -- -- -- --	40 0.64/0.5 2 0.36/0.39 23 1	
Permissible residual current of the electronics (with 0 signal)					
• AC operation	mA	<20			
• DC operation	mA	<20			
Operating times for 0.8 ... 1.1 x U_s¹⁾					
Total break time = Opening delay + Arcing time					
• AC operation	- Closing delay - Opening delay	ms ms	10 ... 80 10 ... 18		45 ... 70 35 ... 55
• DC operation	- Closing delay - Opening delay	ms ms	-- --		45 ... 60 35 ... 55
• Arcing time		ms	10 ... 20		10 ... 20
Operating times for 1.0 x U_s¹⁾					
• AC operation	- Closing delay - Opening delay	ms ms	12 ... 22 10 ... 18		50 ... 60 40 ... 50
• DC operation	- Closing delay - Opening delay	ms ms	-- --		45 ... 55 40 ... 50
Main circuit					
Load rating with AC					
Utilization category AC-1, switching resistive loads					
• Rated operational current I_e	At 40 °C up to 690 V At 60 °C up to 690 V	A A	60 55	70 60	80 70
• Rated power for AC loads ²⁾	230 V 400 V 690 V	kW kW kW	23 39 68	26 46 79	30 53 91
• Minimum conductor cross-section for loads with I_e	At 40 °C At 60 °C	mm ² mm ²	16 16	25 16	25 25
Utilization categories AC-2 and AC-3					
• Rated operational currents I_e	Up to 400 V 440 V 500 V 690 V	A A A A	40 40 40 24	50 50 50 24	65 65 65 47
• Rated power for slipring or squirrel-cage motors at 50 and 60 Hz	At 230 V 400 V 690 V	kW kW kW	11 18.5 22	15 22 22	18.5 30 37
Thermal load capacity		10 s current ³⁾	A	400	420
Power loss per conducting path		At I_e /AC-3	W	2.2	4
				3.8	5.7

¹⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (varistor +2 ms to 5 ms, diode assembly: 2 to 6 times).

²⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

³⁾ According to IEC 60947-4-1.

Rated values for various start-up conditions,
see Chapter 7, "Protection Equipment" → "Overload Relays".



Contactors for Switching Motors

3RT20.3. contactors

Type	3RT2035		3RT2036		3RT2037		3RT2038	
Size	S2	S2	S2	S2	S2	S2	S2	S2
Main circuit								
Load rating with AC								
Utilization category AC-4 (for $I_a = 6 \times I_e$)								
• Maximum values:								
- Rated operational current I_e	Up to 400 V	A	35	41	55	55		
- Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 400 V	kW	18.5	22	30	30		
• The following applies to a contact endurance of about 200 000 operating cycles:								
- Rated operational currents I_e	Up to 400 V	A	22	24	28	30		
	690 V	A	18.5	20	22	24		
- Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 110 V	kW	3.2	3.5	4.1	4.3		
	230 V	kW	6.7	7.3	8.5	9.1		
	400 V	kW	11.6	12.6	14.7	15.8		
	690 V	kW	16.8	18.2	20	21.8		
Load rating with DC								
Utilization category DC-1, switching resistive loads ($L/R \leq 1 \text{ ms}$)								
• Rated operational currents I_e (at 60 °C)								
- 1 conducting path	Up to 24 V	A	55					
	60 V	A	23					
	110 V	A	4.5					
	220 V	A	1					
	440 V	A	0.4					
	600 V	A	0.25					
- 2 conducting paths in series	Up to 24 V	A	55					
	60 V	A	45					
	110 V	A	25					
	220 V	A	5					
	440 V	A	1					
	600 V	A	0.8					
- 3 conducting paths in series	Up to 24 V	A	55					
	60 V	A	55					
	110 V	A	55					
	220 V	A	45					
	440 V	A	2.9					
	600 V	A	1.4					
Utilization category DC-3/DC-5, shunt-wound and series-wound motors ($L/R \leq 15 \text{ ms}$)								
• Rated operational currents I_e (at 60 °C)								
- 1 conducting path	Up to 24 V	A	35					
	60 V	A	6					
	110 V	A	2.5					
	220 V	A	2					
	440 V	A	0.1					
	600 V	A	0.06					
- 2 conducting paths in series	Up to 24 V	A	55					
	60 V	A	45					
	110 V	A	25					
	220 V	A	5					
	440 V	A	0.27					
	600 V	A	0.16					
- 3 conducting paths in series	Up to 24 V	A	55					
	60 V	A	55					
	110 V	A	55					
	220 V	A	25					
	440 V	A	0.6					
	600 V	A	0.35					
Switching frequency								
Switching frequency z in operating cycles/hour								
Contactors without overload relays								
• No-load switching frequency	AC	h^{-1}	5 000					
	AC/DC	h^{-1}	1 500					
• Switching frequency z during rated operation ¹⁾								
- $I_e/AC-1$	At 400 V	h^{-1}	1 200					
- $I_e/AC-2$	At 400 V	h^{-1}	750					
- $I_e/AC-3$	At 400 V	h^{-1}	1 000					
- $I_e/AC-4$	At 400 V	h^{-1}	300					
• Mean value		h^{-1}	15					

¹⁾ Dependence of the switching frequency z' on the operational current I' and operational voltage U' :

$$z' = z \times (I_e/I') \times (400 \text{ V}/U')^{1.5} \times 1/\text{h}$$



Contactors for Switching Motors

3RT20.3. contactors

Type	3RT2035 S2	3RT2036 S2	3RT2037 S2	3RT2038 S2
Conductor cross-sections (1 or 2 conductors connectable)				
Main conductors	Screw terminals			
• Solid or stranded	mm ²	2 x (1 ... 35) ¹⁾ ; 1 x (1 ... 50) ¹⁾		
• Finely stranded with end sleeve	mm ²	2 x (1 ... 25) ¹⁾ ; 1 x (1 ... 35) ¹⁾		
• AWG cables, solid or stranded	AWG	2 x (18 ... 2) ¹⁾ ; 1 x (18 ... 1) ¹⁾		
• Terminal screws - Tightening torque	Nm	Pozidriv size 2; Ø 5 ... 6 3 ... 4.5 (27 ... 40 lb.in)		
Auxiliary and control conductors	Spring-type terminals			
• Solid or stranded	mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾		
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾		
• Solid or stranded AWG (2 x)	AWG	2 x (20 ... 16) ¹⁾ ; 2 x (18 ... 14) ¹⁾		
• Terminal screws - Tightening torque	Nm	M3 (for Pozidriv size 2, Ø 5 ... 6) 0.8 ... 1.2 (7 ... 10.3 lb.in)		
Auxiliary and control conductors²⁾	Spring-type terminals			
• Operating devices ³⁾	mm	3.0 x 0.5		
• Solid or stranded	mm ²	2 x (0.5 ... 2.5)		
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5)		
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 2.5)		
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)		

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

²⁾ Max. external diameter of the cable insulation: 3.6 mm.

On spring-type terminals with conductor cross-sections $\leq 1 \text{ mm}^2$, an insulation stop must be used, see [Accessories](#), page 3/76.

³⁾ Tool for opening the spring-type terminals;
see "[Accessories](#)", page 3/76.



Contactors for Switching Motors

3RT20.4. contactors

Technical data

Contactor	Size Type	S3 3RT20 45	S3 3RT20 46	S3 3RT20 47
General data				
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.	AC and DC operation	 360°	 22.5° 22.5°	For DC operation and forward inclination up to 22.5°: coil voltage tolerance 0.85 ... 1.1 x U_s NSB00478
Upright mounting position:	AC and DC operation	 NSB00477		Special design required. Positions 13 to 16 of the Order No. must be changed to -1AA0 . Additional charge.
Mechanical endurance	Basic units Basic unit with snap-on auxiliary switch block Solid-state compatible aux. switch block	Oper. cycles	10 million 10 million 5 million	
Electrical endurance			See page 2/130.	
Rated insulation voltage U_i (pollution degree 3)	V	1000		
Rated impulse withstand voltage U_{imp}	kV	6		
Safe isolation between coil and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690		
Positively driven operation There is positively driven operation if the NC and NO contacts cannot be closed at the same time	3RT20 4.., 3RT23 4.., 3RT24 5.. (removable aux. switch block) 3RT20 4.., 3RT23 4.., 3RT24 5.. (permanent aux. switch block)		Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC) in accordance with Swiss regulations (SUVA) on request.	
Permissible ambient temperature	in operation when stored	°C °C	-25 ... +60 -55 ... +80	
Degree of protection acc. to IEC 60 947-1 and DIN 40 050			IP 20 (terminal compartment IP 00), coil system IP 40	
Shock resistance	Rectangular pulse Sine pulse	AC and DC operation AC and DC operation	g/ms g/ms	6.8/5 and 4/10 10.6/5 and 6.2/10
Conductor cross-sections				
Short-circuit protection of contactors without overload relays				
Main circuit Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE - acc. to IEC 60 947-4/ EN 60 947-4-4 (VDE 0660 Part 102)				
Type of coord. "1" 1) Type of coord. "2" 1) Weld-free 2)				
A 250 250 125 160 63 100				
Auxiliary circuit Fuse links, utilization category gL/gG DIAZED Type 5SB, NEOZED Type 5SE (weld-free protection at $I_k \geq 1$ kA) or miniature circuit-breaker with C-characteristic (short-circuit current $I_k < 400$ A) A				
A 10 10				

1) According to excerpt from
IEC 60 947-4-1 (VDE 0660 Part 102):
Type of coordination "1":
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



Contactors for Switching Motors

3RT20.4. contactors

Technical data

Contactor	Size Type	S3 3RT20 45		S3 3RT20 46		S3 3RT20 47					
Control circuit											
Coil voltage tolerance		0.8 to 1.1 × U_s									
Power consumption of the coils (with coil in cold state and 1.0 × U_s)		Standard design									
AC operation		Hz	50	50/60	50	50/60					
	Closing p.f.	VA	218 0.61	247 /211 0.62/ 0.57	270 0.68	298 /274 0.7/ 0.62					
	Closed p.f.	VA	21 0.26	25 / 18 0.27/ 0.3	22 0.27	27 / 20 0.29/ 0.31					
		For USA and Canada									
		Hz	50	60	50	60					
	Closing p.f.	VA	218 0.61	232 0.55	270 0.68	300 0.52					
	Closed p.f.	VA	21 0.26	20 0.28	22 0.27	21 0.29					
DC operation	closing = closed	W	15		15						
Permissible residual current of the electronics (with 0 signal)											
	AC operation	mA	$< 25 \text{ mA} \times \left(\frac{230 \text{ V}}{U_s} \right)$								
	DC operation	mA	$< 43 \text{ mA} \times \left(\frac{24 \text{ V}}{U_s} \right)$								
Operating times at 0.8 to 1.1 × U_s ¹⁾ Break-time = opening time + arcing time											
AC operation	closing time	ms	16 ... 57		17 ... 90						
	opening time	ms	10 ... 19		10 ... 25						
DC operation	closing time	ms	90 ... 230		90 ... 230						
	opening time	ms	14 ... 20		14 ... 20						
Arcing time		ms	10 ... 15		10 ... 15						
Operating times at 1.0 × U_s ¹⁾											
AC operation	closing time	ms	18 ... 34		18 ... 30						
	opening time	ms	11 ... 18		11 ... 23						
DC operation	closing time	ms	100 ... 120		100 ... 120						
	opening time	ms	16 ... 20		16 ... 20						
Main circuit											
Load ratings with AC											
AC-1 utilization category, switching resistive load											
Rated operational currents I_e		at 40 °C up to 690 V	A	100	120	120					
		1000 V	A	50	60	70					
		at 60 °C up to 690 V	A	90	100	100					
		1000 V	A	40	50	60					
Ratings of three-phase loads ²⁾ p.f. = 0.95 (at 60 °C)		at 230 V	kW	34	38	38					
		400 V	kW	59	66	66					
		500 V	kW	74	82	82					
		690 V	kW	102	114	114					
		1000 V	kW	66	82	98					
Minimum conductor cross-section with $I_{e,load}$		at 40 °C	mm ²	35	50	50					
		60 °C	mm ²	35	35	35					
AC-2 and AC-3 utilization categories											
Rated operational currents I_e		up to 400 V	A	65	80	95					
		500 V	A	65	80	95					
		690 V	A	47	58	58					
		1000 V	A	25	30	30					
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz		at 230 V	kW	18.5	22	22					
		400 V	kW	30	37	45					
		500 V	kW	37	45	55					
		690 V	kW	55	55	55					
		1000 V	kW	30	37	37					
Thermal loading capacity	10 s current ³⁾	A	600	760	760						
Power loss per conducting path	at $I_e/AC-3$	W	4.6	7.7	10.8						

1) The opening times of the NO contacts and the closing times of the NC contacts increase if the contactor coils are protected against voltage peaks (varistor +2 ms to 5 ms, diode assem-

2) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

3) Acc. to VDE 0660 Part 102.
For rated values for various starting conditions, see Section 3.



Contactors for Switching Motors

3RT20.4. contactors

2

CONTACTORS AND ASSEMBLIES

Technical data

Contactor	Size Type	S3 3RT20 45		S3 3RT20 46		S3 3RT20 47							
Main circuit													
<i>Load ratings with AC</i>													
AC-4 utilization category (at $I_a = 6 \times I_e$)													
Rated operational current I_e		up to 400 V A	55	66	80								
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 400 V kW	30	37	45								
• For a contact endurance of approx. 200 000 operating cycles:													
Rated operational currents I_e		up to 400 V A 690 V A 1000 V A	28 28 20	34 34 23	42 42 23								
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 230 V kW 400 V kW 500 V kW 690 V kW 1000 V kW	8.7 15.1 18.4 25.4 22	10.4 17.9 22.4 30.9 30	12 22 27 38 30								
AC-5a utilization category, switching gas discharge lamps per main conducting path at 230 V													
Rating per lamp		Rated operational current per lamp (A)											
uncorrected													
L 18 W	0.37	Units	243	270									
L 36 W	0.43	Units	209	232									
L 58 W	0.67	Units	134	149									
lead-lag													
L 18 W	0.11	Units	818	909									
L 36 W	0.21	Units	428	476									
L 58 W	0.32	Units	281	312									
Switching gas discharge lamps with correction, electronic ballast per main conducting path at 230 V													
Rating per lamp	Capacitor (μ F)	Rated operational current per lamp (A)											
Parallel correction													
L 18 W	4.5	0.11	Units	160	197	234							
L 36 W	4.5	0.21	Units	160	197	234							
L 58 W	7	0.32	Units	103	127	150							
With electronic ballast, single lamp													
L 18 W	6.8	0.10	Units	455	560	665							
L 36 W	6.8	0.18	Units	253	311	369							
L 58 W	10	0.27	Units	168	207	246							
With electronic ballast, twin lamp													
L 18 W	10	0.18	Units	253	311	369							
L 36 W	10	0.35	Units	130	160	190							
L 58 W	22	0.52	Units	88	108	128							
AC-5b utilization category, switching incandescent lamps per main conducting path at 230/220 V		kW	9	14.6	17.3								
AC-6a utilization category, switching three-phase transformers with inrush			n	30	20	30	20						
Rated operational current I_e		up to 400 V A 690 V A	42.3 42.3	63.5 47	56.3 56.3	80 58	56.3 56.3						
Ratings of three-phase transformers with an inrush of $n = 30$ or 20. The ratings must be re-calculated for other inrush factors x :		at 230 V kVA 400 V kVA 500 V kVA 690 V kVA	16.8 29.3 36.6 50.3	25.3 43.9 54.9 56.2	22.4 39 48.7 67.3	31.9 55.4 69.3 69.3	22.4 39 48.7 67.3						
$P_x = P_{n30} \cdot \frac{30}{x}$													
AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors Ambient temperature 40 °C													
Rated operational currents I_e		up to 400 V A	57	72									
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 μ H) at 50 Hz, 60 Hz and		at 230 V kvar 400 V kvar 525 V kvar 690 V kvar	24 40 50 40	29 50 65 50									



Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT20.4. contactors

Technical data

Contactor	Size Type	S3 3RT20 45	S3 3RT20 46	S3 3RT20 47
-----------	--------------	----------------	----------------	----------------

Main circuit

Load ratings with DC

DC-1 utilization category,
switching resistive load ($L/R \leq 1 \text{ ms}$)

Rated operational current I_e (at 60°C)

Number of conducting paths connected in series

up to 24 V	1	2	3	1	2	3	1	2	3
60 V	A	90	90	90	100	100	100	100	100
110 V	A	23	90	90	60	100	100	60	100
220 V	A	4.5	90	90	9	100	100	9	100
440 V	A								
600 V	A								
		1	5	70	2	10	80	2	10
		0.4	1	2.9	0.6	1.8	1.8	0.6	1.8
		0.26	0.8	1.4	0.4	1	1	0.4	1
								2.6	

DC-3 and DC-5 utilization categories,
shunt and series motors ($L/R \leq 15 \text{ ms}$)

Rated operational current I_e (at 60°C)

Number of conducting paths connected in series

up to 24 V	1	2	3	1	2	3	1	2	3
60 V	A	40	90	90	40	100	100	40	100
110 V	A	6	90	90	6.5	100	100	6.5	100
220 V	A	2.5	90	90	2.5	100	100	2.5	100
440 V	A								
600 V	A								
		1	7	35	1	7	35	1	7
		0.15	0.42	0.8	0.15	0.42	0.8	0.15	0.42
		0.06	0.16	0.35	0.06	0.16	0.35	0.06	0.16
								0.35	

Operating frequency

Operating frequency z in operating cycles per hour

Contactors without overload relays

No-load operating frequency

1/h

AC

DC

AC

DC

AC

DC

Dependence of the operating frequency z' on the operational current I' and the operational voltage U' :

$$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400 \text{ V}}{U'} \right)^{1.5} \text{ 1/h}$$

Contactors with overload relays (mean value)

for AC-1

1/h

AC/DC

1000

AC/DC

900

AC/DC

900

for AC-2

1/h

400

400

350

350

for AC-3

1/h

1000

1000

850

850

for AC-4

1/h

300

300

250

250

Contactor	Size Type	S3 3RT20 4.
-----------	--------------	----------------

Conductor cross-sections

Screw connections
(1 or 2 conductor connections possible)

Main conductor:

With box terminal

Front terminal connected

Back terminal connected

Both terminals connected

mm ²	2.5 ... 35		2.5 ... 50
mm ²	4 ... 50		10 ... 50
mm ²	2.5 ... 16		2.5 ... 16
mm ²	4 ... 70		10 ... 70
mm	6 x 9 x 0.8		6 x 9 x 0.8
AWG	10 ... 2/0		10 ... 2/0

M 6 (hexagon socket)
4 ... 6 (36 ... 53 lb.in)

max. 2 x 35
max. 2 x 35
max. 2 x 16
max. 2 x 50
2 x (6 x 9 x 0.8)

Connection for drilled copper bars

max. width

mm

10

If bars larger than $12 \times 10 \text{ mm}$ are connected, a 3RT19 46-4EA1 terminal cover is to comply with the phase clearance.

Without box terminal
With cable lugs
(1 or 2 conductor connections possible)

Finely stranded with cable lug

10 ... 50¹⁾

Stranded with cable lug

10 ... 70¹⁾

AWG conductor connections, solid or stranded

7 ... 1/0

If conductors larger than 25 mm^2 are connected, a 3RT19 46-4EA1 terminal cover is needed to comply with the phase clearance.

Auxiliary conductor:

Solid

$2 \times (0.5 \dots 1.5); 2 \times (0.75 \dots 2.5)$ acc. to IEC 60 947;

max. $2 \times (0.75 \dots 4)$

Finely stranded with end sleeve

$2 \times (0.5 \dots 1.5); 2 \times (0.75 \dots 2.5)$

AWG conductor connections, solid or stranded

$2 \times (20 \dots 16); 2 \times (18 \dots 14); 1 \times 12$

– Terminal screws

M 3

– Tightening torque

0.8 ... 1.2 (7 ... 10.3 lb.in)

Cage Clamp connections (1 or 2 conductor connections possible)	Auxiliary conductor:
Solid	mm ² 2 x (0.25 ... 2.5)
Finely stranded with end sleeve	mm ² 2 x (0.25 ... 1.5)
Finely stranded without end sleeve	mm ² 2 x (0.25 ... 2.5)
AWG conductor connections, solid or stranded	AWG 2 x (24 ... 14)

• For tool for opening the Cage Clamp connection, see on accessories page 2/85

• An "insulation stop" must be used for conductor cross-sections $\leq 1 \text{ mm}^2$, see accessories on page 2/85.

• Max. outer diameter of conductor insulation: 3.6 mm.

• For information about Cage Clamp connections, see Appendix page 19/17.

1) Only crimping cable lugs acc. to DIN 46 234




Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT10.5. contactors

Technical data

Contactor	Size Type	S6 3RT10 54	S6 3RT10 55	S6 3RT10 56
General data				
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.				
Mechanical endurance		Oper. cycles	10 million	
Electrical endurance			See page 2/130	
Rated insulation voltage U_i (pollution degree 3)	V		1000	
Rated impulse withstand voltage U_{imp}	kV		8	
Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V		690	
Positively driven operation There is positively driven operation if the NC and NO contacts cannot be closed at the same time			Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)	
Permissible ambient temperature	in operation when stored	°C °C	-25 ... +60/+55 with AS-Interface -55 ... +80	
Degree of protection acc. to IEC 60 947-1 and DIN 40 050			IP 00/open type, coil system IP 20	
Shock resistance	Rectangular pulse Sine pulse	g/ms g/ms	8.5/5 and 4.2/10 13.4/5 and 6.5/10	
Conductor cross-sections			See page 2/152	
Electromagnetic compatibility (EMC)			See page 2/113	
Short-circuit protection of contactors without overload relays				
Main circuit Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE – acc. to IEC 60 947-4-1/EN 60 947-4-1	Type of coord. "1" 1) Type of coord. "2" 1) Weld-free 2)	A A A	355 315 80	355 315 160
Auxiliary circuit Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1 \text{ kA}$) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ($I_k < 400 \text{ A}$)	A		10	



Contactor	Size Type	S6 3RT10 5.				
Control circuit						
Coil voltage tolerance AC/DC (UC)						
Power consumption of solenoid mechanism (with coil in cold state and rated range $U_{s \min} \dots U_{s \max}$)		Conventional op. mechanism $U_{s \min}$ $U_{s \max}$				
AC operation	Closing p.f. Closed p.f.	VA VA	250 0.9 4.8 0.8	300 0.9 5.8 0.8	190 0.8 3.5 0.5	280 0.8 4.4 0.4
DC operation	Closing Closed	W W	300 4.3	360 5.2	250 2.3	320 2.8
PLC control input (EN 61 131-2/Type 2)						
Operating times (Break-time = opening time + arcing time)						
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time opening time	ms ms	20 ... 95 40 ... 60	95 ... 135 80 ... 90	35 ... 75 80 ... 90	
– at $U_{s \min} \dots U_{s \max}$	closing time opening time	ms ms	25 ... 50 40 ... 60	100 ... 120 80 ... 90	40 ... 60 80 ... 90	
Arcing time		ms	10 ... 15	10 ... 15	10 ... 15	

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):
Type of coordination "1":
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



Contactors for Switching Motors

3RT10.5. contactors

Technical data

Contactor	Size Type	S6 3RT10 54		S6 3RT10 55		S6 3RT10 56							
Main circuit													
Load ratings with AC													
AC-1 utilization category, switching resistive load													
Rated operational currents I_e		at 40 °C up to 690 V A	160	185	215								
		at 60 °C up to 690 V A	140	160	185								
		at 60 °C up to 1000 V A	80	90	100								
Ratings of three-phase loads ¹⁾ p.f. = 0.95 (at 60 °C)		at 230 V kW	53	60	70								
		400 V kW	92	105	121								
		500 V kW	115	131	152								
		690 V kW	159	181	210								
		1000 V kW	131	148	165								
Minimum conductor cross-section with $I_{e\text{ load}}$		at 40 °C mm ²	70	95	95								
		60 °C mm ²	50	70	95								
AC-2 and AC-3 utilization categories													
Rated operational currents I_e		up to 500 V A	115	150	185								
		690 V A	115	150	170								
		1000 V A	53	65	65								
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz		at 230 V kW	37	50	61								
		400 V kW	64	84	104								
		500 V kW	81	105	132								
		690 V kW	113	146	167								
		1000 V kW	75	90	90								
Thermal loading capacity	10 s current ²⁾	A	1100	1300	1480								
Power loss per conducting path	at $I_e/AC-3/500$ V	W	7	9	13								
AC-4 utilization category (at $I_a = 6 \times I_e$)													
Rated operational current I_e	up to 400 V	A	97	132	160								
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 400 V	kW	55	75	90								
• For a contact endurance of approx. 200 000 operating cycles:													
Rated operational currents I_e	up to 500 V A	54	68	81									
	690 V A	48	57	65									
	1000 V A	34	38	42									
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 230 V kW	16	20	25									
	400 V kW	29	38	45									
	500 V kW	37	47	57									
	690 V kW	48	55	65									
	1000 V kW	49	55	60									
AC-6a utilization category, switching three-phase transformers with inrush													
Rated operational current I_e	n	30	20	30	20	30	20						
Ratings of three-phase transformers with an inrush of $n = 30$ or 20. The ratings must be re-calculated for other inrush factors x :	up to 690 V A	90	115	99	148	99	148						
	at 230 V kVA	35	45	39	58	39	58						
	400 V kVA	62	79	68	102	68	102						
	500 V kVA	77	99	85	128	85	128						
	690 V kVA	107	137	118	176	118	176						
	1000 V kVA	80	80	98	98	117	117						
$P_x = P_{n30} \cdot \frac{30}{x}$													
AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors													
Ambient temperature 40 °C	up to 500 V A	105	125	145									
Rated operational currents I_e	at 230 V kvar	42	50	58									
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 μ H) at 50 Hz, 60 Hz and	400 V kvar	72	86	100									
	500 V kvar	90	108	125									
	690 V kvar	72	86	100									

1) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102.
For rated values for various starting conditions,
see Section 3.



Contactors for Switching Motors

Technical data

Contactor	Size Type	S6 3RT10 54			S6 3RT10 55			S6 3RT10 56											
Main circuit																			
<i>Load ratings with DC</i>																			
DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)																			
Rated operational current I_e (at 60 °C)																			
Number of conducting paths connected in series																			
up to 24 V		1			2			3											
60 V		A			160			160											
110 V		A			160			160											
220 V		A			3.4			20											
440 V		A			0.8			3.2											
600 V		A			0.5			1.4											
					0.5			1.6											
DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)																			
Rated operational current I_e (at 60 °C)																			
Number of conducting paths connected in series																			
up to 24 V		1			2			3											
60 V		A			160			160											
110 V		A			7.5			160											
220 V		A			2.5			160											
440 V		A			0.6			160											
600 V		A			0.17			0.65											
					0.12			11.5											
Operating frequency																			
Operating frequency z in operating cycles per hour																			
Contactors without overload relays		No-load operating frequency			1/h			2000											
Dependence of the operating frequency z' on the operational current I' and the operational voltage U' :		for AC-1			1/h			800											
		for AC-2			1/h			400											
		for AC-3			1/h			1000											
		for AC-4			1/h			130											
Contactors with overload relays (mean value)		1/h			60			60											
Contactor	Size Type	S6 3RT10 5.																	
Conductor cross-sections																			
Screw connections		Main conductor: with 3RT19 55-4G box terminal (75 HP)			Front terminal connected			Back terminal connected											
		finely stranded with end sleeve			mm ²			mm ²											
		Finely stranded without end sleeve			16 ... 70			16 ... 70											
		Stranded			mm ²			mm ²											
		AWG conductor connections, solid/stranded			16 ... 70			16 ... 70											
		Ribbon cable (qty. x width x thickness)			6 ... 2/0			6 ... 2/0											
		with 3RT19 56-4G box terminal			min. 3 x 9 x 0.8			min. 3 x 9 x 0.8											
		Finely stranded with end sleeve			mm			mm											
		Finely stranded without end sleeve			mm			mm											
		Stranded			mm			mm											
		AWG conductor connections, solid/stranded			16 ... 120			16 ... 120											
		Ribbon cable (qty. x width x thickness)			6 ... 250 kcmil			6 ... 250 kcmil											
		– Terminal screws			min. 3 x 9 x 0.8			min. 3 x 9 x 0.8											
		– Tightening torque			max. 10 x 15.5 x 0.8			max. 10 x 15.5 x 0.8											
		Nm			M 10 (hexagon socket, A/F 4)			max. 2 x (10 x 15.5 x 0.8)											
					10 ... 12 (90 ... 110 lb.in)														
Without box terminal/busbar connection																			
		Finely stranded with cable lug			mm ²			16 ... 95											
		Stranded with cable lug			mm ²			25 ... 120											
		AWG conductor connections, solid or stranded			AWG			If cable lugs acc. to DIN 46 235 are connected, as of a conductor cross-section of 95 mm ² a 3RT19 56-4EA1 terminal cover is necessary to comply with the phase clearance.											
		Connecting bar (max. width)			mm			4 ... 250 kcmil											
		– Terminal screws			17			M 8 x 25 (A/F 13)											
		– Tightening torque			Nm			10 ... 14 (89 ... 124 lb.in)											
Auxiliary conductor:																			
		Solid			mm ²			2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5) acc. to IEC 60 947;											
		Finely stranded with end sleeve			mm ²			max. 2 x (0.75 ... 4)											
		AWG conductor connections, solid or stranded			AWG			2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5)											
		– Terminal screws			M 3 (PZ 2)			2 x (18 ... 14)											
		– Tightening torque			Nm			0.8 ... 1.2 (7 ... 10.3 lb.in)											



Contactors for Switching Motors

3RT10.6. contactors

Technical data

Contactor	Size Type	S10 3RT10 64	S10 3RT10 65	S10 3RT10 66
General data				
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.				
Mechanical endurance	Oper. cycles	10 million		
Electrical endurance		See page 2/130		
Rated insulation voltage U_i (pollution degree 3)	V	1000		
Rated impulse withstand voltage U_{imp}	kV	8		
Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690		
Positively driven operation There is positively driven operation if the NC and NO contacts cannot be closed at the same time		Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)		
Permissible ambient temperature	in operation when stored	°C °C	-25 ... +60/+55 with AS-Interface -55 ... +80	
Degree of protection acc. to IEC 60 947-1 and DIN 40 050			IP 00/open type, coil system IP 20	
Shock resistance	Rectangular pulse Sine pulse	g/ms g/ms	8.5/5 and 4.2/10 13.4/5 and 6.5/10	
Conductor cross-sections			See page 2/155	
Electromagnetic compatibility (EMC)			See page 2/113	
Short-circuit protection				
Main circuit Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE – acc. to IEC 60 947-4-1/EN 60 947-4-1	Type of coord. "1" 1) Type of coord. "2" 1) Weld-free 2)	A A A	500 400 250	
Auxiliary circuit Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1$ kA) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ($I_k < 400$ A)	A	10		
Contactor	Size Type	S10 3RT10 6.		
Control circuit				
Coil voltage tolerance	AC/DC (UC)	0.8 \times $U_{s\ min}$... 1.1 \times $U_{s\ max}$		
Power consumption of solenoid mechanism (with coil in cold state and rated range $U_{s\ min}$... $U_{s\ max}$)				
AC operation	closing p.f. closed p.f.	VA	$U_{s\ min}$ 490 0.9 5.6 0.9	$U_{s\ max}$ 590 0.9 6.7 0.9
DC operation	closing closed	W W	540 6.1	650 7.4
PLC control input (EN 61 131-2/Type 2)		DC 24 V /≤ 30 mA		
Operating times (Break-time = opening time + arcing time)		Conventional op. mechanism	Solid-state op. mechanism	
– at 0.8 \times $U_{s\ min}$... 1.1 \times $U_{s\ max}$	closing time opening time	ms ms	30 ... 95 40 ... 80	105 ... 145 80 ... 100
– at $U_{s\ min}$... $U_{s\ max}$	closing time opening time	ms ms	35 ... 50 50 ... 80	110 ... 130 80 ... 100
Arcing time		ms	10 ... 15	10 ... 15

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):
Type of coordination "1":
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



Contactors for Switching Motors

3RT10.6. contactors

2

CONTACTORS AND ASSEMBLIES

Technical data

Contactor	Size Type	S10 3RT10 64		S10 3RT10 65		S10 3RT10 66							
Main circuit													
Load ratings with AC													
AC-1 utilization category, switching resistive load													
Rated operational currents I_e		at 40 °C up to 690 V	A	275	330								
		at 60 °C up to 690 V	A	250	300								
		at 60 °C up to 1000 V	A	100	150								
Ratings of three-phase loads ¹⁾ p.f. = 0.95 (at 60 °C)		at 230 V	kW	94	113								
		400 V	kW	164	197								
		500 V	kW	205	246								
		690 V	kW	283	340								
		1000 V	kW	164	246								
Minimum conductor cross-section with $I_{e\text{ load}}$		at 40 °C	mm ²	150	185								
		60 °C	mm ²	120	185								
AC-2 and AC-3 utilization categories													
Rated operational currents I_e		up to 500 V	A	225	265	300							
		690 V	A	225	265	280							
		1000 V	A	68	95	95							
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz		at 230 V	kW	73	85	97							
		400 V	kW	128	151	171							
		500 V	kW	160	189	215							
		690 V	kW	223	265	280							
		1000 V	kW	90	132	132							
Thermal loading capacity													
10 s current ²⁾	A	1800		2400		2400							
Power loss per conducting path	at $I_e/AC-3/500$ V	W	17	18		22							
AC-4 utilization category (at $I_a = 6 \times I_e$)													
Rated operational current I_e		up to 400 V	A	195	230	280							
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 400 V	kW	110	132	160							
• For a contact endurance of approx. 200 000 operating cycles:													
Rated operational currents I_e		up to 500 V	A	96	117	125							
		690 V	A	85	105	115							
		1000 V	A	42	57	57							
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 230 V	kW	30	37	40							
		400 V	kW	54	66	71							
		500 V	kW	67	82	87							
		690 V	kW	82	102	112							
		1000 V	kW	59	80	80							
AC-6a utilization category, switching three-phase transformers with inrush													
Rated operational current I_e		n	30	20	30	20	30						
		up to 690 V	A	151	227	182	273						
Ratings of three-phase transformers with an inrush of n = 30 or 20. The ratings must be re-calculated for other inrush factors x:		at 230 V	kVA	60	90	72	109						
		400 V	kVA	105	157	126	189						
		500 V	kVA	130	196	158	236						
		690 V	kVA	180	271	217	326						
		1000 V	kVA	117	177	164	164						
$P_x = P_{n=30} \cdot \frac{30}{x}$													
AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors													
Ambient temperature 40 °C													
Rated operational currents I_e		up to 500 V	A	183	220								
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 μ H) at 50 Hz, 60 Hz and		at 230 V	kvar	73	88								
		400 V	kvar	127	152								
		500 V	kvar	159	191								
		690 V	kvar	127	152								

1) Industrial furnaces and electric heaters
with resistance heating, for example (higher
current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102.
For rated values for various
starting conditions, see Section 3.



Contactors for Switching Motors

3RT10.6. contactors

Technical data

Contactor	Size Type	S10 3RT10 64	S10 3RT10 65	S10 3RT10 66
-----------	--------------	-----------------	-----------------	-----------------

Main circuit

Load ratings with DC

DC-1 utilization category,
switching resistive load ($L/R \leq 1 \text{ ms}$)

Rated operational current I_e (at 60°C)

		Number of conducting paths connected in series					
		1	2	3	1	2	3
up to 24 V	A	200	200	200	300	300	300
60 V	A	200	200	200	300	300	300
110 V	A	18	200	200	33	300	300
220 V	A	3.4	20	200	3.8	300	300
440 V	A	0.8	3.2	11.5	0.9	4	11
600 V	A	0.5	1.6	4	0.6	2	5.2

DC-3 and DC-5 utilization categories,
shunt and series motors ($L/R \leq 15 \text{ ms}$)

Rated operational current I_e (at 60°C)

		Number of conducting paths connected in series					
		1	2	3	1	2	3
up to 24 V	A	200	200	200	300	300	300
60 V	A	7.5	200	200	11	300	300
110 V	A	2.5	200	200	3	300	300
220 V	A	0.6	2.5	200	0.6	2.5	300
440 V	A	0.17	0.65	1.4	0.18	0.65	1.4
600 V	A	0.12	0.37	0.75	0.125	0.37	0.75

Operating frequency

Operating frequency z in operating cycles per hour

Contactors without overload relays	No-load operating frequency	1/h	2000	2000	2000
Dependence of the operating frequency z' on the operational current I' and the operational voltage U' :	for AC-1	1/h	750	800	750
	for AC-2	1/h	250	300	250
	for AC-3	1/h	500	700	500
	for AC-4	1/h	130	130	130
Contactors with overload relays (mean value)		1/h	60	60	60

Contactor	Size Type	S10 3RT10 6.		
-----------	--------------	-----------------	--	--

Conductor cross-sections

Screw connections	Main conductor: with 3RT19 66-4G box terminal	Front terminal connected	Back terminal connected	Both terminals connected
Finely stranded with end sleeve	mm ²	70 ... 240		
Finely stranded without end sleeve	mm ²	70 ... 240		
Stranded	mm ²	95 ... 300		
AWG conductor connections, solid or stranded	AWG	3/0 ... 600 kcmil		250 ... 500 kcmil
Ribbon cable (qty. x width x thickness)	mm	min. 6 x 9 x 0.8	min. 6 x 9 x 0.8	
– Terminal screws	mm	max. 20 x 24 x 0.5	max. 20 x 24 x 0.5	
– Tightening torque	Nm	M 12 (hexagon sokket, A/F 5) 20 ... 22 (180 ... 195 lb.in)		max. 2 x (20 x 24 x 0.5)
Without box terminal/busbar connection				
Finely stranded with cable lug	mm ²	50 ... 240		
Stranded with cable lug	mm ²	70 ... 240		
AWG conductor connections, solid or stranded	AWG	2/0 ... 500 kcmil		
Connecting bar (max. width)	mm	25		
– Terminal screws	M 10 x 30 (A/F 17)			
– Tightening torque	Nm	14 ... 24 (124 ... 210 lb.in)		
Auxiliary conductor:				
Solid	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5) acc. to IEC 60 947; max. 2 x (0.75 ... 4)		
Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5)		
AWG conductor connections, solid or stranded	AWG	2 x (18 ... 14) M 3 (PZ 2)		
– Terminal screws	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)		
– Tightening torque				



Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT10.7. contactors

Technical data

Contactor	Size Type	S12 3RT10 75		S12 3RT10 76					
General data									
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.									
Mechanical endurance		Oper. cycles	10 million						
Electrical endurance			See page 2/130						
Rated insulation voltage U_i (pollution degree 3)	V		1000						
Rated impulse withstand voltage U_{imp}	kV		8						
Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V		690						
Positively driven operation There is positively driven operation if the NC and NO contacts cannot be closed at the same time			Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)						
Permissible ambient temperature	in operation when stored	°C °C	-25 ... +60/+55 with AS-Interface -55 ... +80						
Degree of protection acc. to IEC 60 947-1 and DIN 40 050			IP 00/open type, coil system IP 20						
Shock resistance	Rectangular pulse Sine pulse	g/ms g/ms	8.5/5 and 4.2/10 13.4/5 and 6.5/10						
Conductor cross-sections									
Electromagnetic compatibility (EMC)									
Short-circuit protection									
Main circuit Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE – to IEC 60 947-4/EN 60 947-4-4 (VDE 0660 Part 102)	Type of coord. "1" 1) Type of coord. "2" 1) Weld-free 2)	A A A	630 500 250	630 500 315					
Auxiliary circuit Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1 \text{ kA}$) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ($I_k < 400 \text{ A}$)	A		10						
Control circuit									
Coil voltage tolerance	AC/DC (UC)		0.8 $\times U_{s \min} \dots 1.1 \times U_{s \max}$						
Power consumption of solenoid mechanism (with coil in cold state and rated range $U_{s \min} \dots U_{s \max}$)									
AC operation	closing p.f. closed p.f.	VA	$U_{s \min}$ 700 0.9	$U_{s \max}$ 830 0.9	Conventional op. mechanism Solid-state op. mechanism				
DC operation	closing closed	W W	770 8.5	920 10	560 0.8 7.4 0.8 750 0.8 7 0.8 600 4 800 5				
PLC control input (EN 61 131-2/Type 2)									
Operating times (Break-time = opening time + arcing time)									
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time opening time	ms	45 ... 100 60 ... 100	120 ... 150 80 ... 100	Conventional op. mechanism Solid-state op. mechanism Operation via A1/A2				
– at $U_{s \min} \dots U_{s \max}$	closing time opening time	ms	50 ... 70 70 ... 100	125 ... 150 80 ... 100	PLC input 60 ... 90 80 ... 100				
Arcing time		ms	10 ... 15	10 ... 15	65 ... 80 80 ... 100 10 ... 15				

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):
Type of coordination "1":
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



Contactors for Switching Motors

3RT10.7. contactors

Technical data

Contactor	Size Type	S12 3RT10 75		S12 3RT10 76							
Main circuit											
Load ratings with AC											
AC-1 utilization category, switching resistive load											
Rated operational currents I_e		at 40 °C up to 690 V A	430	610							
		at 60 °C up to 690 V A	400	550 ³⁾							
		at 60 °C up to 1000 V A	200	200							
Ratings of three-phase loads ¹⁾ p.f. = 0.95 (at 60 °C)		at 230 V 400 V 500 V 690 V 1000 V kW	151 263 329 454 329	208 362 452 624 329							
Minimum conductor cross-section with $I_{e\text{ load}}$		at 40 °C 60 °C mm ²	2 x 150 240	2 x 185 2 x 185							
AC-2 and AC-3 utilization categories											
Rated operational currents I_e		up to 500 V A	400	500 ⁴⁾							
		690 V A	400	450							
		1000 V A	180	180							
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz		at 230 V 400 V 500 V 690 V 1000 V kW	132 231 291 400 250	164 291 363 453 250							
Thermal loading capacity											
10 s current ²⁾		A	3200	4000							
Power loss per conducting path		at $I_e/AC-3/500$ V	W	35	55						
AC-4 utilization category (at $I_a = 6 \times I_e$)											
Rated operational current I_e		up to 400 V A	350	430							
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 400 V kW	200	250							
• For a contact endurance of approx. 200 000 operating cycles:											
Rated operational currents I_e		up to 500 V A	150	175							
		690 V A	135	150							
		1000 V A	80	80							
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 230 V 400 V 500 V 690 V 1000 V kW	48 85 105 133 113	56 98 123 148 113							
AC-6a utilization category, switching three-phase transformers											
with inrush		n	30	20	20						
Rated operational current I_e		up to 690 V A	251	377	270						
Ratings of three-phase transformers with an inrush of $n = 30$ or 20. The ratings must be re-calculated for other inrush factors x :		at 230 V kVA	100	150	107						
		400 V kVA	173	261	187						
		500 V kVA	217	326	234						
		690 V kVA	300	450	323						
		1000 V kVA	311	311	311						
$P_x = P_{n30} \cdot \frac{30}{x}$											
AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors											
Ambient temperature 40 °C											
Rated operational currents I_e		up to 500 V A	287	407							
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 μ H) at 50 Hz, 60 Hz and		at 230 V kvar	114	162							
		400 V kvar	199	282							
		500 V kvar	248	352							
		690 V kvar	199	282							

1) Industrial furnaces and electric heaters
with resistance heating, for example (higher
current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102.
For rated values for various
starting conditions, see Section 3.

3) Ambient temperature 50 °C
for 3RT10 76-N contactor

4) Ambient temperature 55 °C
for 3RT10 76-N contactor



Contactors for Switching Motors



3RT10.7. contactors

Technical data

Contactor	Size Type	S12 3RT10 75			S12 3RT10 76								
Main circuit													
Load ratings with DC													
DC-1 utilization category, switching resistive load ($L/R \leq 1 \text{ ms}$)													
Rated operational current I_e (at 60°C)													
	Number of conducting paths connected in series	1	2	3									
up to 24 V	A	400	400	400									
60 V	A	330	400	400									
110 V	A	33	400	400									
220 V	A	3.8	400	400									
440 V	A	0.9	4	11									
600 V	A	0.6	2	5.2									
DC-3 and DC-5 utilization categories, shunt and series motors ($L/R \leq 15 \text{ ms}$)													
Rated operational current I_e (at 60°C)													
	Number of conducting paths connected in series	1	2	3									
up to 24 V	A	400	400	400									
60 V	A	11	400	400									
110 V	A	3	400	400									
220 V	A	0.6	2.5	400									
440 V	A	0.18	0.65	1.4									
600 V	A	0.125	0.37	0.75									

Operating frequency

Operating frequency z in operating cycles per hour							
Contactors without overload relays	No-load operating frequency	1/h	2000		2000		
Dependence of the operating frequency z' on the operational current I' and the operational voltage U' :	for AC-1	1/h	700		500		
	for AC-2	1/h	200		170		
	for AC-3	1/h	500		420		
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400 \text{ V}}{U'} \right)^{1.5} \text{ 1/h}$	for AC-4	1/h	130		130		
Contactors with overload relays (mean value)		1/h	60		60		

Contactor	Size Type	S12 3RT10 7.					
Conductor cross-sections							
Screw connections							
Main conductor: with 3RT19 66-4G box terminal		Front terminal connected	Back terminal connected	Both terminals connected			
Finely stranded with end sleeve	mm ²	70 ... 240	120 ... 185 	min. 2 x 50, max. 2 x 185			
Finely stranded without end sleeve	mm ²	70 ... 240	120 ... 185 	min. 2 x 50, max. 2 x 185			
Stranded	mm ²	95 ... 300	120 ... 240 	min. 2 x 50, max. 2 x 185			
AWG conductor connections, solid or stranded	AWG	3/0 ... 600 kcmil	250 ... 500 kcmil	min. 2 x 70, max. 2 x 240			
Ribbon cable (qty. x width x thickness)	mm	min. 6 x 9 x 0.8	min. 6 x 9 x 0.8	min. 2 x 2/0, max. 2 x 500 kcmil			
– Terminal screws	mm	max. 20 x 24 x 0.5	max. 20 x 24 x 0.5	max. 2 x (20 x 24 x 0.5)			
– Tightening torque	Nm	M 12 (hexagon socket, A/F 5) 20 ... 22 (180 ... 195 lb.in)					
<u>Without box terminal/busbar connection</u>							
Finely stranded with cable lug	mm ²	50 ... 240					
Stranded with cable lug	mm ²	70 ... 240					
			If cable lugs acc. to DIN 46 234 are connected, as of a conductor cross-section of 240 mm ² and acc. to DIN 46 235 as of a conductor cross-section of 185 mm ² a 3RT19 66-4EA1 terminal cover is necessary to comply with the phase clearance.				
AWG conductor connections, solid or stranded	AWG	2/0 ... 500 kcmil					
Connecting bar (max. width)	mm	25					
– Terminal screws		M 10 x 30 (A/F 17)					
– Tightening torque	Nm	14 ... 24 (124 ... 210 lb.in)					
Auxiliary conductor:							
Solid	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5) acc. to IEC 60 947; max. 2 x (0.75 ... 4)					
Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5)					
AWG conductor connections, solid or stranded	AWG	2 x (18 ... 14) M 3 (PZ 2)					
– Terminal screws		0.8 ... 1.2 (7 ... 10.3 lb.in)					
– Tightening torque	Nm						



Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT12.6. vacuum contactors

Technical data

Contactor	Size Type	S10 3RT12 64	S10 3RT12 65	S10 3RT12 66
General data				
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.				
Mechanical endurance	Oper. cycles	10 million		
Electrical endurance				
Rated insulation voltage U_i (pollution degree 3)	V	1000		
Rated impulse withstand voltage U_{imp}	kV	8		
Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690		
Positively driven operation There is positively driven operation if the NC and NO contacts cannot be closed at the same time				
Permissible ambient temperature	in operation when stored	°C °C	-25 ... +60/+55 with AS-Interface -55 ... +80	
Degree of protection acc. to IEC 60 947-1 and DIN 40 050				
Shock resistance	Rectangular pulse Sine pulse	g/ms g/ms	8.5/5 and 4.2/10 13.4/5 and 6.5/10	
Conductor cross-sections				
Electromagnetic compatibility (EMC)				
Short-circuit protection				
Main circuit Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE – to IEC 60 947-4/EN 60 947-4-4 (VDE 0660 Part 102)				
Type of coord. "1" 1) Type of coord. "2" 1) Weld-free 2)	A A A	500 500 400		
Auxiliary circuit Fuse links, utilization category gL/gG (weld-free protection at $I_L \geq 1 \text{ kA}$) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ($I_k < 400 \text{ A}$)				
	A	10		
Control circuit				
Coil voltage tolerance AC/DC (UC)				
0.8 $\times U_{s\min} \dots 1.1 \times U_{s\max}$				
Power consumption of solenoid mechanism (with coil in cold state and rated range $U_{s\min} \dots U_{s\max}$)				
AC operation	closing p.f. closed p.f.	VA	Conventional op. mechanism $U_{s\min}$ 530 0.9	Solid-state op. mechanism $U_{s\min}$ 420 0.8
DC operation	closing closed	W W	$U_{s\max}$ 630 0.9	$U_{s\max}$ 570 0.8
			7.4 4.3	5.6 0.8
			0.9 0.8	
PLC control input (EN 61 131-2/Type 2)				
DC 24 V/≤ 30 mA				
Operating times (Break-time = opening time + arcing time)				
– at $0.8 \times U_{s\min} \dots 1.1 \times U_{s\max}$	closing time opening time	ms	30 ... 95 40 ... 80	Conventional op. mechanism Solid-state op. mechanism Operation via A1/A2 PLC input
– at $U_{s\min} \dots U_{s\max}$	closing time opening time	ms	35 ... 50 50 ... 80	105 ... 145 80 ... 100
Arcing time		ms	10 ... 15	110 ... 130 80 ... 100 10 ... 15
				50 ... 65 80 ... 100 10 ... 15

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):
Type of coordination "1":
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



Contactors and Contactor Assemblies

Contactors for Switching Motors

3RT12.6. vacuum contactors

2

CONTACTORS AND
ASSEMBLIES

Technical data

Contactor	Size Type	S10 3RT12 64	S10 3RT12 65	S10 3RT12 66
Main circuit				
Load ratings with AC				
AC-1 utilization category, switching resistive load				
Rated operational currents I_e	at 40 °C up to 1000 V at 60 °C up to 1000 V	A A	330 300	
Ratings of three-phase loads ¹⁾ p.f. = 0.95 (at 60 °C)	at 230 V 400 V 500 V 690 V 1000 V	kW kW kW kW kW	113 197 246 340 492	
Minimum conductor cross-section with $I_{e\text{ load}}$	at 40 °C 60 °C	mm ² mm ²	185 185	
AC-2 and AC-3 utilization categories				
Rated operational currents I_e	up to 1000 V	A	225	265 300
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz	at 230 V 400 V 500 V 690 V 1000 V	kW kW kW kW kW	73 128 160 223 320	85 151 189 265 378 97 171 215 288 428
Thermal loading capacity				
10 s current ²⁾	A	1800	2120	2400
Power loss per conducting path	at $I_e/\text{AC-3}$	W	9	12 14
AC-4 utilization category (at $I_a = 6 \times I_e$)				
Rated operational current I_e	up to 690 V	A	195	230 280
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 400 V	kW	110	132 160
• For a contact endurance of approx. 400 000 operating cycles:				
Rated operational currents I_e	up to 690 V 1000 V	A A	97 68	115 81 140 98
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 230 V 400 V 500 V 690 V 1000 V	kW kW kW kW kW	30 55 68 94 95	37 65 81 112 114 45 79 98 138 140
AC-6a utilization category, switching three-phase transformers				
with inrush		n	30	20
Rated operational current I_e	up to 690 V	A	185	278
Ratings of three-phase transformers with an inrush of n = 30 or 20. The ratings must be re-calculated for other inrush factors x:	at 230 V 400 V 500 V 690 V 1000 V	kVA kVA kVA kVA kVA	74 128 160 221 320	111 193 241 332 482
$P_x = P_{n30} \cdot \frac{30}{x}$				
AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors				
Ambient temperature 40 °C				
Rated operational currents I_e	up to 500 V	A	220	
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 μH) at 50 Hz, 60 Hz and	at 230 V 400 V 500 V 690 V	kvar kvar kvar kvar	88 152 191 152	
Operating frequency				
Operating frequency z in operating cycles per hour				
Contactors without overload relays	No-load operating frequency	1/h	2000	2000
Dependence of the operating frequency z' on the operational current I' and the operational voltage U' :	for AC-1 for AC-2 for AC-3 for AC-4	1/h 1/h 1/h 1/h	800 300 750 250	750 250 750 250
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400 \text{ V}}{U'} \right)^{1.5} \text{ 1/h}$				
Contactors with overload relays (mean value)		1/h	60	60

1) Industrial furnaces and electric heaters
with resistance heating, for example (higher
current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102.
For rated values for various
starting conditions, see Section 3.



Contactors for Switching Motors

3RT12.6. vacuum contactors

Technical data

Contactor	Size Type	S10 3RT12 6.		
Conductor cross-sections				
Screw connections	Main conductor: with 3RT19 66-4G box terminal	Front terminal connected	Back terminal connected	Both terminals connected
	Finely stranded with end sleeve	mm ² 70 ... 240	120 ... 185 120 ... 185 120 ... 240	min. 2 x 50, max. 2 x 185 min. 2 x 50, max. 2 x 185 min. 2 x 70, max. 2 x 240 min. 2 x 2/0, max. 1 x 500 kcmil
	Finely stranded without end sleeve	mm ² 70 ... 240	NSB0497/69	NSB0498/1
	Stranded	mm ² 95 ... 300		
	AWG conductor connections, solid or stranded	AWG 3/0 ... 600 kcmil	250 ... 500 kcmil	
	Ribbon cable (qty. x width x thickness)	mm min. 6 x 9 x 0.8 mm max. 20 x 24 x 0.5	min. 6 x 9 x 0.8 max. 20 x 24 x 0.5	max. 2 x (20 x 24 x 0.5)
	– Terminal screws		M 12 (hexagon socket, A/F 5)	
	– Tightening torque	Nm	20 ... 22 (180 ... 195 lb.in)	
<u>Without box terminal/busbar connection</u>				
	Finely stranded with cable lug	mm ² 50 ... 240		
	Stranded with cable lug	mm ² 70 ... 240		If cable lugs acc. to DIN 46 234 are connected, as of a conductor cross-section of 240 mm ² and acc. to DIN 46 235 as of a conductor cross-section of 185 mm ² a 3RT19 66-4EA1 terminal cover is necessary to comply with the phase clearance.
	AWG conductor connections, solid or stranded	AWG 2/0 ... 500 kcmil		
	Connecting bar (max. width)	mm 25		
	– Terminal screws		M 10 x 30 (A/F 17)	
	– Tightening torque	Nm	14 ... 24 (124 ... 210 lb.in)	
Auxiliary conductor:				
	Solid	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5) acc. to IEC 60 947; max. 2 x (0.75 ... 4)	
	Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5)	
	AWG conductor connections, solid or stranded	AWG 2 x (18 ... 14) M 3 (PZ 2)		
	– Terminal screws			
	– Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)	



Contactors for Switching Motors

3RT12.7. contactors

Technical data

Contactor	Size Type	S12 3RT12 75		S12 3RT12 76						
General data										
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.										
Mechanical endurance	Oper. cycles	10 million								
Electrical endurance		See page 2/130								
Rated insulation voltage U_i (pollution degree 3)	V	1000								
Rated impulse withstand voltage U_{imp}	kV	8								
Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690								
Positively driven operation There is positively driven operation if the NC and NO contacts cannot be closed at the same time		Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)								
Permissible ambient temperature	in operation when stored	°C °C	-25 ... +60/+55 with AS-Interface -55 ... +80							
Degree of protection acc. to IEC 60 947-1 and DIN 40 050			IP 00/open type, coil system IP 20							
Shock resistance	Rectangular pulse Sine pulse	g/ms g/ms	8.5/5 and 4.2/10 13.4/5 and 6.5/10							
Conductor cross-sections		See page 2/164								
Electromagnetic compatibility (EMC)		See page 2/113								
Short-circuit protection										
Main circuit Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE – to IEC 60 947-4/EN 60 947-4-4 (VDE 0660Part 102)	Type of coord. "1" 1) Type of coord. "2" 1) Weld-free 2)	A A A	800 800 500							
Auxiliary circuit Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1 \text{ kA}$) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ($I_k < 400 \text{ A}$)	A	10								
Control circuit										
Coil voltage tolerance	AC/DC (UC)	0.8 \times $U_{s \min}$... 1.1 \times $U_{s \max}$								
Power consumption of solenoid mechanism (with coil in cold state and rated range $U_{s \min} \dots U_{s \max}$)		Conventional op. mechanism		Solid-state op. mechanism						
AC operation	closing p.f. closed p.f.	VA	$U_{s \min}$ 700 0.9	$U_{s \max}$ 830 0.9	$U_{s \min}$ 560 0.8	$U_{s \max}$ 750 0.8				
DC operation	closing closed	W W	770 8.5	920 10	600 4	800 5				
PLC control input (EN 61 131-2/Type 2)		DC 24 V/≤ 30 mA								
Operating times (Break-time = opening time + arcing time)		Conventional op. mechanism		Solid-state op. mechanism Operation via A1/A2						
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$		closing time	ms	45 ... 100	120 ... 150					
		opening time	ms	60 ... 100	60 ... 90					
– at $U_{s \min} \dots U_{s \max}$		closing time	ms	50 ... 70	125 ... 150					
		opening time	ms	70 ... 100	65 ... 80					
Arcing time			ms	10 ... 15	80 ... 100					
				10 ... 15	10 ... 15					

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):

Type of coordination "1":

Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":

No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



Contactors for Switching Motors

3RT12.7. vacuum contactors

Technical data

Contactor	Size Type	S12 3RT12 75		S12 3RT12 76							
Main circuit											
Load ratings with AC											
AC-1 utilization category, switching resistive load											
Rated operational currents I_e		at 40 °C up to 1000 V	A	610							
		at 60 °C up to 1000 V	A	550							
Ratings of three-phase loads ¹⁾ p.f. = 0.95 (at 60 °C)		at 230 V	kW	208							
		400 V	kW	362							
		500 V	kW	452							
		690 V	kW	624							
		1000 V	kW	905							
Minimum conductor cross-section with $I_{e\text{ load}}$		at 40 °C	mm ²	2 x 185							
		60 °C	mm ²	2 x 185							
AC-2 and AC-3 utilization categories											
Rated operational currents I_e		up to 1000 V	A	400	500						
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz		at 230 V	kW	132	164						
		400 V	kW	231	291						
		500 V	kW	291	363						
		690 V	kW	400	507						
		1000 V	kW	578	728						
Thermal loading capacity											
10 s current ²⁾		A	3200	4000							
Power loss per conducting path		at $I_e/AC-3$	W	21	32						
AC-4 utilization category (at $I_a = 6 \times I_e$)											
Rated operational current I_e		up to 690 V	A	350	430						
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 400 V	kW	200	250						
• For a contact endurance of approx. 400 000 operating cycles:											
Rated operational currents I_e		up to 690 V	A	175	215						
		1000 V	A	123	151						
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 230 V	kW	56	70						
		400 V	kW	98	122						
		500 V	kW	124	153						
		690 V	kW	172	212						
		1000 V	kW	183	217						
AC-6a utilization category, switching three-phase transformers with inrush											
Rated operational current I_e		up to 690 V	A	30	20						
Ratings of three-phase transformers with an inrush of $n = 30$ or 20. The ratings must be re-calculated for other inrush factors x:		at 230 V	kVA	279	419						
		400 V	kVA	111	167						
		500 V	kVA	193	290						
		690 V	kVA	241	363						
		1000 V	kVA	332	501						
				482	726						
AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors											
Ambient temperature 40 °C		up to 500 V	A	407							
Rated operational currents I_e		at 230 V	kvar	162							
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 μ H) at 50 Hz, 60 Hz and		400 V	kvar	282							
		500 V	kvar	352							
		690 V	kvar	282							
Operating frequency											
Operating frequency z in operating cycles per hour											
Contactors without overload relays		No-load operating frequency	1/h	2000							
Dependence of the operating frequency z' on the operational current I' and the operational voltage U':		for AC-1	1/h	700							
		for AC-2	1/h	250							
		for AC-3	1/h	750							
		for AC-4	1/h	250							
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400 \text{ V}}{U'} \right)^{1.5} \text{ 1/h}$											
Contactors with overload relays (mean value)			1/h	60							

1) Industrial furnaces and electric heaters
with resistance heating, for example (higher
current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102.
For rated values for various
starting conditions, see Section 3.



Contactors for Switching Motors

3RT12.7. vacuum contactors

2

CONTACTORS AND ASSEMBLIES

Technical data

Contactor	Size Type	S12 3RT12 7.		
Conductor cross-sections				
Screw connections	Main conductor: with 3RT19 66-4G box terminal	Front terminal connected	Back terminal connected	Both terminals connected
	Finely stranded with end sleeve	mm ² 70 ... 240	120 ... 185  NSB00479	min. 2 x 50, max. 2 x 185 min. 2 x 50, max. 2 x 185 min. 2 x 70, max. 2 x 240 min. 2 x 2/0, max. 2 x 500 kcmil
	Finely stranded without end sleeve	mm ² 70 ... 240	120 ... 185  NSB00480	min. 2 x 50, max. 2 x 185 min. 2 x 50, max. 2 x 185 min. 2 x 70, max. 2 x 240 min. 2 x 2/0, max. 2 x 500 kcmil
	Stranded	mm ² 95 ... 300	120 ... 240  NSB00481	min. 2 x 70, max. 2 x 240 min. 2 x 2/0, max. 2 x 500 kcmil
	AWG conductor connections, solid or stranded	AWG 3/0 ... 600 kcmil	250 ... 500 kcmil	min. 2 x 50, max. 2 x 185 min. 2 x 50, max. 2 x 185 min. 2 x 70, max. 2 x 240 min. 2 x 2/0, max. 2 x 500 kcmil
	Ribbon cable (qty. x width x thickness)	mm min. 6 x 9 x 0.8 max. 20 x 24 x 0.5	min. 6 x 9 x 0.8 max. 20 x 24 x 0.5	max. 2 x (20 x 24 x 0.5)
	– Terminal screws	mm	M 12 (hexagon socket, A/F 5)	
	– Tightening torque	Nm	20 ... 22 (180 ... 195 lb.in)	
<u>Without box terminal/busbar connection</u>				
	Finely stranded with cable lug	mm ² 50 ... 240		
	Stranded with cable lug	mm ² 70 ... 240		
				If cable lugs acc. to DIN 46 234 are connected, as of a conductor cross-section of 240 mm ² and acc. to DIN 46 235 as of a conductor cross-section of 185 mm ² a 3RT19 66-4EA1 terminal cover is necessary to comply with the phase clearance.
	AWG conductor connections, solid or stranded	AWG 2/0 ... 500 kcmil		
	Connecting bar (max. width)	mm 25		
	– Terminal screws	Nm	M 10 x 30 (A/F 17)	
	– Tightening torque	Nm	14 ... 24 (124 ... 210 lb.in)	
Auxiliary conductor:				
	Solid	mm ² 2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5) acc. to IEC 60 947; max. 2 x (0.75 ... 4)		
	Finely stranded with end sleeve	mm ² 2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5)		
	AWG conductor connections, solid or stranded	AWG 2 x (18 ... 14) M 3 (PZ 2)		
	– Terminal screws	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)	
	– Tightening torque	Nm		

Technical data

Contactor	Size Type	S3 3RT24 46			
General data					
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.	AC and DC operation	360° 	22.5° 22.5°  NSB00478 For DC operation and forward inclination up to 22.5°: coil voltage tolerance 0.85 ... 1.1 x U_s		
Upright mounting position:					
	AC operation		Special design required. Positions 13 ... 16 of the Order No. must be changed to -1AA0 . Additional charge. -		
	DC operation				
Mechanical endurance	Oper. cycles	10 million			
Electrical endurance AC-1 utilization category at I_e	Oper. cycles	0.5 million			
Rated insulation voltage U_i (pollution degree 3)	V	1000			
Rated impulse withstand voltage U_{imp}	kV	6			
Safe isolation between coil and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690			
Permissible ambient temperature	in operation when stored	°C °C	-25 ... +60 -55 ... +80		
Degree of protection acc. to IEC 60 947-1 and DIN 40 050		IP 20 (terminal compartment IP 00), coil system IP 40			
Shock resistance					
Rectangular pulse	AC and DC operation	g/ms	6.8/5 and 4/10		
Sine pulse	AC and DC operation	g/ms	10.6/5 and 6.2/10		
Conductor cross-sections	See page 2/167				
Short-circuit protection of contactors without overload relays					
Main circuit					
Fuse links, utilization category gL/G NH, Type 3NA	Type of coord. "1" ²⁾	A	250		
Fuse links, utilization category gR SITOR, Type 3NE	Type of coord. "2" ²⁾	A	250		
Auxiliary circuit					
Fuse links, utilization category gL/G (weld-free protection at $I_k \geq 1$ kA) DIAZED Type 5SB, NEOZED Type 5SE	A	10			
or miniature circuit-breaker with C-characteristic ($I_k < 400$ A)	A	10			
Control circuit					
Coil voltage tolerance	AC/DC	0.8 ... 1.1 x U_s			
Power consumption of the coils (with coil in cold state and $1.0 \times U_s$)					
AC operation	Hz	50	50/60	50	60
	closing p.f.	270 0.68	298 /274 0.7 / 0.62	270 0.68	300 0.52
	closed p.f.	22 0.27	27 / 20 0.29/ 0.31	22 0.27	21 0.29
DC operation	closing = closed	W	15		
Operating times at $0.8 \dots 1.1 \times U_s$ ¹⁾					
Break-time = opening time + arcing time					
AC operation	closing time opening time	ms	17 ... 90 10 ... 25		
DC operation	closing time opening time	ms	90 ... 230 14 ... 20		
Arcing time		ms	10 ... 15		
Operating times at $1.0 \times U_s$ ¹⁾					
AC operation	closing time opening time	ms	18 ... 30 11 ... 23		
DC operation	closing time opening time	ms	100 ... 120 16 ... 20		

1) The opening times of the NO contacts and the closing times of the NC contacts increase if the contactor coils are protected against voltage peaks: varistor +2 ms to 5 ms, diode assemblies 2 to 6 times.

2) According to excerpt from
IEC 60 947-4-1 (VDE 0660 Part 102):
Type of coordination "1".
Destruction of the contactor and the overload
relay is permissible. The contactor and/or over-
load relay must be replaced if necessary.

Type of coordination "2":
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.



Contactors for Special Applications

3RT24 contactors, 3-pole, for switching resistive loads (AC-1)

2

CONTACTORS AND
ASSEMBLIES

Technical data

Contactor	Size Type	S3 3RT24 46					
Main circuit							
Load ratings with AC							
AC-1 utilization category, switching resistive load							
Rated operational currents I_e		at 40°C up to 690 V	A	140			
		at 60°C up to 690 V	A	130			
		at 1000 V	A	60			
Ratings of three-phase loads p.f. = 0.95 (at 60°C)		at 230 V	kW	50			
		400 V	kW	86			
		500 V	kW	107			
		690 V	kW	148			
		1000 V	kW	98			
Minimum conductor cross-section with $I_{e\text{ load}}$		at 40°C	mm²	50			
		at 60°C	mm²	50			
AC-2 and AC-3 utilization categories							
With an electrical endurance of 1.3 million operating cycles							
Rated operational current I_e		up to 690 V	A	44			
Ratings of slipping or squirrel-cage motors at 50 Hz and 60 Hz (at 60°C)		at 230 V	kW	12.7			
		400 V	kW	22			
		500 V	kW	29.9			
		690 V	kW	38.2			
Power loss per conducting path	at $I_e/AC-1$	W	12.5				
Load ratings with DC							
DC-1 utilization category, switching resistive load $L/R \leq 1 \text{ ms}$							
Number of conducting paths when connected in series							
Rated operational currents I_e (at 60°C)		up to 24 V	A	1			
		60 V	A	130			
		110 V	A	80			
		220 V	A	12			
		440 V	A	130			
		600 V	A	2.5			
				130			
				6			
				3.4			
		440 V	A	0.8			
		600 V	A	0.48			
				1.3			
DC-3 and DC-5 utilization categories, shunt and series motors							
Number of conducting paths when connected in series							
Rated operational currents I_e (at 60°C)		up to 24 V	A	1			
		60 V	A	2			
		110 V	A	3			
		220 V	A	1.25			
		440 V	A	130			
		600 V	A	0.35			
				130			
		440 V	A	0.15			
		600 V	A	0.035			
				4			
		440 V	A	0.15			
		600 V	A	0.035			
				0.8			
		440 V	A	0.42			
		600 V	A	0.035			
				0.45			
Operating frequency							
Operating frequency z in operating cycles per hour							
Contactors without overload relays	No-load operating frequency	1/h	AC operation	DC operation			
			5000	1000			
Rated operation	for AC-1 for AC-3	1/h 1/h	650 1000	650 1000			
Dependence of the operating frequency z' on the operational current I' and the operational voltage U' :							
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400 \text{ V}}{U'} \right)^{1.5} \text{ 1/h}$							



Contactors for Special Applications

3RT24 contactors, 3-pole, for switching resistive loads (AC-1)

Technical data


Contactor	Size Type	S3 3RT24 46		
Conductor cross-sections				
Screw connections (1 or 2 conductor connections possible)	Main conductor: With box terminal	mm ²	Front terminal connected	Back terminal connected
	Finely stranded with end sleeve	2.5 ... 50	 NSB0469	2.5 ... 50
	Finely stranded without end sleeve	4 ... 50	 NSB0469	10 ... 50
	Solid	mm ²	2.5 ... 16	2.5 ... 16
	Stranded	mm ²	4 ... 70	10 ... 70
	Ribbon cable (qty. x width x thickness)	mm	6 x 9 x 0.8	6 x 9 x 0.8
	AWG conductor connections	AWG	10 ... 2/0	10 ... 2/0
	– Terminal screws	Nm	M 6 (hexagon socket) 4 ... 6 (36 ... 53 lb.in)	
	– Tightening torque	mm	10	
Connection for drilled copper bars	max. width			If bars larger than 12 x 10 mm are connected, a 3RT19 46-4EA1 terminal cover is necessary to comply with the phase clearance
<u>Without box terminal with cable lugs</u>				
	Finely stranded with cable lug	mm ²	10 ... 50 ¹⁾	If conductors larger than 25 mm ² are connected, a 3RT19 46-4EA1 terminal cover is necessary to comply with the phase clearance
	Stranded with cable lug	mm ²	10 ... 70 ¹⁾	
	AWG conductor connections, solid or stranded	AWG	7 ... 1/0	
Auxiliary conductor:				
	Solid	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5) acc. to IEC 60 947; max. 2 x (0.75 ... 4)	
	Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5)	
	AWG conductor connections, solid or stranded	AWG	2 x (20 ... 16); 2 x (18 ... 14); 1 x 12	
	– Terminal screws	Nm	M 3 0.8 ... 1.2 (7 ... 10.3 lb.in)	
	– Tightening torque			



Contactors for Special Applications

3RT14 contactors, 3-pole, for switching resistive loads (AC-1)

Technical data

Contactor	Size Type	S6 3RT14 56			
General data					
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.					
Mechanical endurance		Oper. cycles	10 million		
Electrical endurance AC-1 utilization category at I_e		Oper. cycles	0.5 million		
Rated insulation voltage U_i (pollution degree 3)		V	1000		
Rated impulse withstand voltage U_{imp}		kV	8		
Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])		V	690		
Permissible ambient temperature	in operation when stored	°C °C	-25 ... +60/+55 with AS-Interface -55 ... +80		
Degree of protection acc. to IEC 60 947-1 and DIN 40 050		IP 00/open type, coil system IP 20			
Shock resistance Rectangular pulse Sine pulse		g/ms g/ms	8.5/5 and 4.2/10 13.4/5 and 6.5/10		
Conductor cross-sections					
Electromagnetic compatibility (EMC)					
Short-circuit protection					
Main circuit Fuse links, utilization category gL/gG, NH, Type 3NA		Type of coordination "1" A	355		
Fuse links, utilization category gR, SITOR, Type 3NE		Type of coordination "2" A	350		
Auxiliary circuit Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1 \text{ kA}$) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ($I_k < 400 \text{ A}$)		A	10		
Control circuit					
Coil voltage tolerance		AC/DC (UC)	$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$		
Power consumption of solenoid mechanism (with coil in cold state and rated range $U_{s \min} \dots U_{s \max}$)		Conventional op. mechanism $U_{s \min}$ $U_{s \max}$		Solid-state op. mechanism $U_{s \min}$ $U_{s \max}$	
AC operation	closing	VA	250	300	190
	p.f.		0.9	0.9	0.8
DC operation	closed	VA	4.8	5.8	3.5
	p.f.		0.8	0.8	0.5
	closing	W	300	360	250
	closed		4.3	5.2	2.3
PLC control input (EN 61 131-2/Type 2)		DC 24 V/≤ 30 mA			
Operating times (Break-time = opening time + arcing time)		Conventional op. mechanism		Solid-state op. mechanism Operation via A1/A2	
- at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$		closing time	ms	20 ... 95	35 ... 75
		opening time	ms	40 ... 60	80 ... 90
- at $U_{s \min} \dots U_{s \max}$		closing time	ms	25 ... 50	100 ... 120
		opening time	ms	40 ... 60	80 ... 90
Arcing time			ms	10 ... 15	10 ... 15
Main circuit				PLC input	
Load ratings with AC				95 ... 135	
AC-1 utilization category, switching resistive load				80 ... 90	
Rated operational currents I_e		at 40 °C up to 690 V	A	275	
		at 60 °C up to 690 V	A	250	
		at 1000 V	A	100	
Ratings of three-phase loads p.f. = 0.95 (at 60 °C)		at 230 V	kW	95	
		400 V	kW	165	
		500 V	kW	205	
		690 V	kW	285	
		1000 V	kW	165	
Minimum conductor cross-section with $I_{e \text{ load}}$		at 40 °C	mm ²	2 × 70	
		at 60 °C	mm ²	120	
Power loss per conducting path		at $I_e/\text{AC-1}$	W	20	



Special Applications

3RT14 contactors, 3-pole, for switching resistive loads (AC-1)

Technical data

Contactor	Size Type	S6 3RT14 56		
-----------	--------------	----------------	--	--

Main circuit

Load ratings with AC

AC-2 and AC-3 utilization category

With an electrical endurance of 1.3 million operating cycles

Rated operational current I_e	up to 690 V	A	97
	at 230 V	kW	30
Ratings of slipping or squirrel-cage motors at 50 Hz and 60 Hz (at 60°C)	400 V	kW	55
	500 V	kW	55
	690 V	kW	90

Load ratings with DC

DC-1 utilization category, switching resistive load ($L/R \leq 1 \text{ ms}$)

Number of conducting paths connected in series	1	2	3
Rated operational currents I_e (at 60°C)	up to 24 V	A	315
	60 V	A	315
	110 V	A	18
	220 V	A	3.4
	440 V	A	0.8
	600 V	A	0.5

DC-3 and DC-5 utilization categories, shunt and series motors
($L/R \leq 15 \text{ ms}$)

Number of conducting paths connected in series	1	2	3
Rated operational currents I_e (at 60°C)	up to 24 V	A	315
	60 V	A	7.5
	110 V	A	2.5
	220 V	A	0.6
	440 V	A	0.17
	600 V	A	0.12

Operating frequency

Operating frequency z in operating cycles per hour

Contactors without overload relays	No-load op. frequency for AC-1 for AC-3	1/h 1/h 1/h	2000 600 1000
Dependence of the operating frequency z' on the operational current I' and operational voltage U' :			
$z' = z \cdot \left(\frac{I_e}{I'} \cdot \left(\frac{400 \text{ V}}{U'} \right)^{1.5} \right) \text{ 1/h}$			

Conductor cross-sections

Screw connections	Main conductor: with 3RT19 55-4G box terminal	Front terminal connected	Back terminal connected	Both terminals connected				
					mm ²	mm ²		
	Finely stranded with end sleeve	10 ... 70	10 ... 70	max. 1x50, 1x70	mm ²	mm ²		
	Finely stranded without end sleeve	10 ... 70	10 ... 70	max. 1x50, 1x70				
	Stranded	16 ... 70	16 ... 70	max. 2 x 70				
	AWG conductor connections, solid or stranded	6 ... 2/0	6 ... 2/0	max. 2 x 1/0				
	Ribbon cable (qty. x width x thickness)	mm	min. 3 x 9 x 0.8	min. 3 x 9 x 0.8				
		mm	max. 6 x 15.5 x 0.8	max. 6 x 15.5 x 0.8	max. 2 x (6 x 15.5 x 0.8)			
	with 3RT19 56-4G box terminal							
	Finely stranded with/without end sleeve	10 ... 120	10 ... 120	max. 1 x 95, 1 x 120				
	Stranded	16 ... 120	16 ... 120	max. 2 x 120				
	AWG conductor connections, solid or stranded	AWG	6 ... 250 kcmil	6 ... 250 kcmil	max. 2 x 3/0			
	Ribbon cable (qty. x width x thickness)	mm	min. 3 x 9 x 0.8	min. 3 x 9 x 0.8				
		mm	max. 10 x 15.5 x 0.8	max. 10 x 15.5 x 0.8	max. 2 x (10 x 15.5 x 0.8)			
	– Terminal screws		M 10 (hexagon socket, A/F 13)					
	– Tightening torque	Nm	10 ... 12 (90 ... 110 lb.in)					
	Without box terminal/busbar connection							
	Finely stranded with cable lug	16 ... 95	16 ... 95					
	Stranded with cable lug	25 ... 120	25 ... 120					
	AWG conductor connections, solid or stranded	4 ... 250 kcmil	4 ... 250 kcmil					
	Connecting bar (max. width)	mm	17					
	– Terminal screws		M 8 x 25 (A/F 13)					
	– Tightening torque	Nm	10 ... 14 (89 ... 124 lb.in)					
	Auxiliary conductor:							
	Solid	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5) acc. to IEC 60 947;					
			max. 2 x (0.75 ... 4)					
	Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5)					
	AWG conductor connections, solid or stranded	AWG	2 x (18 ... 14)					
	– Terminal screws		M 3 (PZ2)					
	– Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)					




Contactors for Special Applications

3RT14 contactors, 3-pole, for switching resistive loads (AC-1)

Technical data

Contactor	Size Type	S10 3RT14 66	S12 3RT14 76
General data			
Permissible mounting position The contactors are designed for operation on a vertical mounting surface.			
Mechanical endurance	Oper. cycles	10 million	
Electrical endurance AC-1 utilization category at I_e	Oper. cycles	0.5 million	
Rated insulation voltage U_i (pollution degree 3)	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690	
Permissible ambient temperature	in operation when stored	${}^{\circ}\text{C}$ ${}^{\circ}\text{C}$	-25 ... +60/+55 with AS-Interface -55 ... +80
Degree of protection acc. to IEC 60 947-1 and DIN 40 050			IP 00/open type, coil system IP 20
Shock resistance Rectangular pulse Sine pulse	g/ms	8.5/5 and 4.2/10 13.4/5 and 6.5/10	
Conductor cross-sections		See page 2/172	
Electromagnetic compatibility (EMC)		See page 2/113	
Short-circuit protection			
Main circuit Fuse links, utilization category gL/gG, NH, Type 3NA	Type of coordination "1"	A	500
Fuse links, utilization category gR, SITOR, Type 3NE	Type of coordination "2"	A	500
Auxiliary circuit Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1 \text{ kA}$) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ($I_k < 400 \text{ A}$)		A	10



Contactor	Size Type	S10 3RT14 66	
Control circuit			
Coil voltage tolerance AC/DC (UC)			
Power consumption of solenoid mechanism (with coil in cold state and rated range $U_{s \text{ min}} \dots U_{s \text{ max}}$)		Conventional op. mechanism	Solid-state op. mechanism
AC operation	closing p.f. closed p.f.	VA VA	$U_{s \text{ min}}$ 490 0.9 5.6 0.9 $U_{s \text{ max}}$ 590 0.9 6.7 0.9 $U_{s \text{ min}}$ 400 0.8 4 0.5 $U_{s \text{ max}}$ 530 0.8 5 0.4
DC operation	closing closed	W W	540 6.1 650 7.4 440 3.2 580 3.8
PLC control input (EN 61 131-2/Type 2)			
Operating times (Break-time = opening time + arcing time)		Conventional op. mechanism	Solid-state op. mechanism Operation via A1/A2
- at $0.8 \times U_{s \text{ min}} \dots 1.1 \times U_{s \text{ max}}$	closing time opening time	ms ms	30 ... 95 40 ... 80 105 ... 145 80 ... 200 45 ... 80 80 ... 100
- at $U_{s \text{ min}} \dots U_{s \text{ max}}$	closing time opening time	ms ms	35 ... 50 50 ... 80 110 ... 130 80 ... 100 50 ... 65 80 ... 100
Arcing time		ms	10 ... 15 10 ... 15 10 ... 15
PLC input			



Contactors for Special Applications

3RT14 contactors, 3-pole, for switching resistive loads (AC-1)

Technical data

Contactor	Size	Type	S12 3RT14 76					
Control circuit								
Coil voltage tolerance			AC/DC (UC)					
Power consumption of solenoid mechanism (with coil in cold state and rated range $U_{s \min} \dots U_{s \max}$)			$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$					
AC operation	closing	VA	$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$		
	p.f.		700	830	560	750		
	closed	VA	0.9	0.9	0.8	0.8		
	p.f.		7.6	9.2	5.4	7		
DC operation	closing	W	0.9	0.9	0.8	0.8		
	closed	W	770	920	600	800		
			8.5	10	4	5		
PLC control input (EN 61 131-2/Type 2)			DC 24 V/≤ 30 mA					
Operating times (Break-time = opening time + arcing time)			Conventional op. mechanism					
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$		closing time	ms	45 ... 100	120 ... 150	60 ... 90		
		opening time	ms	60 ... 100	80 ... 100	80 ... 100		
– at $U_{s \min} \dots U_{s \max}$		closing time	ms	50 ... 70	125 ... 150	65 ... 80		
		opening time	ms	70 ... 100	80 ... 100	80 ... 100		
Arcing time			ms	10 ... 15	10 ... 15	10 ... 15		
Contactor	Size	Type	S10 3RT14 66		S12 3RT14 76			
Main circuit								
Load ratings with AC								
AC-1 utilization category, switching resistive load								
Rated operational currents I_e		at 40 °C up to 690 V	A	400	690			
		at 60 °C up to 690 V	A	380	650 1)			
		at 1000 V	A					
Ratings of three-phase loads		at 230 V	kW	145	245			
p.f. = 0.95 (at 60 °C)		400 V	kW	250	430			
		500 V	kW	315	535			
		690 V	kW	430	740			
		1000 V	kW					
Minimum conductor cross-section with $I_{e \text{ load}}$		at 40 °C	mm ²	240	2 x 240			
		at 60 °C	mm ²	240	2 x 240			
Power loss per conducting path		at $I_e/AC-1$	W	27	55			
AC-2 and AC-3 utilization categories								
With an electrical endurance of 1.3 million operating cycles								
Rated operational current I_e		up to 690 V	A	138	170			
Ratings of slipring or squirrel-cage		at 230 V	kW	37	55			
motors at 50 Hz and 60 Hz (at 60 °C)		400 V	kW	75	90			
		500 V	kW	90	110			
		690 V	kW	132	160			
Load ratings with DC								
DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)								
Number of conducting paths connected in series			1	2	3	1		
Rated operational currents I_e (at 60 °C)		up to 24 V	A	380	380	380		
		60 V	A	380	380	380		
		110 V	A	33	380	380		
		220 V	A	3.8	380	380		
		440 V	A	0.9	4	11		
		600 V	A	0.6	2	5.2		
DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)			1	2	3	1		
Number of conducting paths connected in series			1	2	3	1		
Rated operational currents I_e (at 60 °C)		up to 24 V	A	380	380	380		
		60 V	A	11	380	380		
		110 V	A	3	380	380		
		220 V	A	0.6	2.5	380		
		440 V	A	0.18	0.65	1.4		
		600 V	A	0.125	0.37	0.75		

1) Ambient temperature 50 °C
for 3RT14 76-N contactor

Technical data

Contactor	Size Type	S10 3RT14 66	S12 3RT14 76	
Main circuit				
Operating frequency				
Operating frequency z in operating cycles per hour				
Contactors without overload relays				
	No-load op. frequency for AC-1 for AC-3	1/h 1/h 1/h	2000 600 1000	
Dependence of the operating frequency z' on the operational current I' and operational voltage U' :				
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400V}{U'} \right)^{1.5} \text{ 1/h}$				
Conductor cross-sections				
Screw connections	Main conductor: with 3RT19 66-4G box terminal	Front terminal connected	Back terminal connected	
	Finely stranded with end sleeve	mm ² 70 ... 240	120 ... 185 NSB00479	min. 2 x 50, max. 2 x 185
	Finely stranded without end sleeve	mm ² 70 ... 240	120 ... 185 NSB00480	min. 2 x 50, max. 2 x 185
	Stranded	mm ² 95 ... 300	120 ... 240 NSB00481	min. 2 x 70, max. 2 x 240
	AWG conductor connections, solid or stranded		3/0 ... 600 kcmil	min. 2 x 2/0, max. 2 x 500 kcmil
	Ribbon cable (qty. x width x thickness)	mm mm	min. 6 x 9 x 0.8 max. 20 x 24 x 0.5	min. 6 x 9 x 0.8 max. 20 x 24 x 0.5
	– Terminal screws		M 12 (hexagon socket, A/F 5) 20 ... 22 (180 ... 195 lb.in)	max. 2 x (20 x 24 x 0.5)
	– Tightening torque	Nm		
	Without box terminal/busbar connection			
Auxiliary conductor:	Finely stranded with cable lug	mm ² 50 ... 240	If cable lugs acc. to DIN 46 234 are connected, as of a conductor cross-section of 240 mm ² and DIN 46 235 as of a conductor cross-section of 185 mm ² , a 3RT19 66-4EA1 terminal cover is necessary to comply with the phase clearance.	
	Stranded with cable lug	mm ² 70 ... 240		
	AWG conductor connections, solid or stranded	AWG 2/0 ... 500 kcmil		
	Connecting bar (max. width)	mm 25		
	– Terminal screws	M 10 x 30 (A/F 17)		
	– Tightening torque	Nm 14 ... 24 (124 ... 210 lb.in)		



Contactors for Special Applications

3RT23 contactors, 4-pole (4 NO), switching resistive loads

More information

Contactors	Type Size	3RT23 16 S00	3RT23 17	3RT23 25 S0	3RT23 26	3RT23 27
Dimensions (W x H x D) ³⁾	Width mm		45 x 57.5 x 73		60 x 85 x 97	
General data						
Permissible mounting position¹⁾						
Mechanical endurance	Operating cycles	30 million		10 million		
Electrical endurance at $I_e/AC-1$	Operating cycles		Approx. 0.5 million			
Rated insulation voltage U_i (pollution degree 3)	V	690				
Permissible ambient temperature	• During operation • During storage	°C °C	-25 ... +60 -55 ... +80			
Degree of protection Acc. to EN 60947-1, Appendix C	Device Connection range		IP20		IP20 IP00	
Touch protection acc.to EN 50274			Finger-safe			
Short-circuit protection of contactors without overload relays						
Main circuit						
Fuse links, gG operational class: LV HRC 3NA, DIAZED 5SB, NEOZED 5SE according to IEC 60947-4-1/ EN 60947-4-1	• Type of coordination "1"1) • Type of coordination "2"1) • Weld-free	A A A	35 20 10		63 20 16	
Control						
Solenoid coil operating range						
• AC operation	- At 50 Hz - At 60 Hz		0.8 ... 1.1 x U_s 0.85 ... 1.1 x U_s		--	
• DC operation	- At 50 °C - At 60 °C		0.8 ... 1.1 x U_s 0.85 ... 1.1 x U_s		--	
• AC/DC operation			--		0.8 ... 1.1 x U_s	
Power consumption of the solenoid coils (when coil is cold and 1.0 x U_s)						
• AC operation, 50 Hz, standard version	- Closing - P.f. - Closed - P.f.	VA	-- -- VA --		77 0.82 9.8 0.25	
• AC operation, 50/60 Hz, standard version	- Closing - P.f. - Closed - P.f.	VA	27/24.3 0.8/0.75	37/33 0.8/0.75	81/79 0.72/0.74	
• AC operation, 60 Hz, USA, Canada	- Closing - P.f. - Closed - P.f.	VA	4.2/3.3 0.25/0.25	5.7/4.4 0.25/0.25	10.5/8.5 0.25/0.28	
• DC operation	- Closing - P.f. - Closed - P.f. = Closed	VA W	31.7 0.77 4.8 0.25 4	43 0.77 6.5 0.25 5.9	87 0.76 9.4 0.28 5.9	
Operating times for 0.8 ... 1.1 x U_s²⁾						
Total break time = Opening delay + Arcing time						
• AC operation	- Closing delay - Opening delay	ms ms	8 ... 35 3.5 ... 14	8 ... 33 4 ... 15	9 ... 38 4 ... 16	8 ... 40 4 ... 16
• DC operation	- Closing delay - Opening delay	ms ms	30 ... 100 7 ... 13		50 ... 170 15 ... 17.5	
• Arcing time		ms	10 ... 15		10	
Main circuit						
AC capacity						
Utilization category AC-1, switching resistive loads						
• Rated operational currents I_e	At 40 °C, up to 690 V At 60 °C, up to 690 V	A A	18 16	22 20	35 30	40 35
• Rated power for AC loads P.f. = 0.95 (at 40 °C)	At 460 V	HP	5	5	10	10
• Minimum conductor cross-section for loads with I_e	At 40 °C At 60 °C	mm ² mm ²	2.5 2.5	2.5 2.5	10 10	10 10
Utilization category AC-3						
• Rated operational currents I_e	At 60 °C, up to 400 V At 460 V	A HP	9 5	12 5	15.5 10	17 10
• Rated power for slipping or squirrel-cage motors at 60 Hz						

¹⁾ In accordance with the corresponding 3-pole 3RT2 contactors.²⁾ With size S00, DC operation: Operating times at 0.85 ... 1.1 x U_s .³⁾ Dimensions for devices with screw terminals. Size S0 for AC operation. DC operation: Depth + 10mm.



Contactors for Special Applications

3RT23 contactors, 4-pole (4 NO), for switching resistive loads

2

CONTACTORS AND ASSEMBLIES

Technical specifications

Type		mm	3RT23 36	3RT23 44	3RT23 46
Size			S2	S3	S3
Dimensions (W x H x D)		mm	74.5 x 113.5 x 130 / 74.5 x 113.5 x 130	73 x 112 x 110	93 x 146 x 134
• With mounted auxiliary switch block		mm	74.5 x 113.5 x 173.5 / 74.5 x 113.5 x 177.5	73 x 112 x 160	93 x 146 x 183

General technical specifications

Permissible mounting position ¹⁾			
Mechanical endurance	Operating cycles		
Electrical endurance at $I_e/AC-1$	Operating cycles		
Rated insulation voltage U_i (pollution degree 3)	V		
Permissible ambient temperature			
• During operation	°C	-25 ... +60	
• During storage	°C	-55 ... +80	
Degree of protection acc. to IEC 60947-1, Appendix C	Device Connection range	IP20	
Touch protection acc. to EN 50274	Finger-safe		

Short-circuit protection of contactors without overload relays

Main circuit			
Fuse links, operational class gG: LV HRC, 3NA; DIAZED, 5SB; NEOZED, 5SE according to IEC 60947-4-1/EN 60947-4-1	• Type of coordination "1" ¹⁾ • Type of coordination "2" ¹⁾ • Weld-free	A	on request 250 on request 125 on request 63 250 160 100

Control circuit

Coil operating range (AC/DC)	0.8 ... 1.1 x U_s		
Power consumption of the solenoid coils (when coil is cold and 1.0 x U_s)			
• AC operation, 50 Hz	- Closing VA 190 270 - P.f. VA 0.72 0.68 - Closed VA 16 22 - P.f. VA 0.37 0.27		
• AC operation, 50/60 Hz	- Closing VA 210/188 298/274 - P.f. 0.69/0.65 0.72/0.62 - Closed VA 17.2/16.5 27/20 - P.f. 0.36/0.3 0.29/0.31		
• DC operation	- Closing W 15 = Closed		

Operating times for 0.8 ... 1.1 x U_s ²⁾

Total break time = Opening delay + Arcing time

• DC operation	- Closing delay ms	110 ... 200
• AC operation	- Opening delay ms	14 ... 20
• AC operation	- Closing delay ms	20 ... 50
• AC operation	- Opening delay ms	10 ... 18
• Arcing time	ms	10 ... 25
	ms	10 ... 20

Main circuit

AC capacity

Utilization category AC-1, switching resistive loads

• Rated operational currents I_e	At 40 °C, up to 690 V A	60	110	140
	At 60 °C, up to 690 V A	55	100	120
• Rated power for AC loads P.f. = 0.95 (at 40 °C)	At 230 V kW	21	42	53
	400 V kW	36	72	92
• Minimum conductor cross-section for loads with I_e	At 40 °C mm ²	16	50	50
	At 60 °C mm ²	25	50	50

Utilization categories AC-2 and AC-3

• Rated operational currents I_e	At 60 °C, up to 400 V A	--	--
• Rated power for slipring or squirrel-cage motors at 50 and 60 Hz	At 230 V kW	--	--
	400 V kW	--	--

¹⁾ In accordance with the corresponding 3-pole 3RT1 contactors.²⁾ With size S00, DC operation: Operating times for 0.85 ... 1.1 x U_s



Contactors for Special Applications

3RT25 contactors, 4-pole (2 NO + 2 NC), for switching motors


Technical specifications

Type	3RT2516 S00	3RT2517 S00	3RT2518 S00	3RT2526 S0	3RT2535 S2	3RT2536
------	----------------	----------------	----------------	---------------	---------------	---------

General technical specifications

Permissible mounting position

The contactors are designed for operation on a vertical mounting surface.



Upright mounting position



NSB0_00477a

Special version required

Mechanical endurance	Operating cycles	30 million	10 million
----------------------	------------------	------------	------------

Electrical endurance at $I_e/AC-1$	Operating cycles	Approx. 0.5 million
------------------------------------	------------------	---------------------

Rated insulation voltage U_i (Pollution degree 3)	V	690
--	---	-----

Permissible ambient temperature	$^{\circ}C$	-25 ... +60	-25 ... +60
• During operation	$^{\circ}C$	-55 ... +80	-55 ... +80

Protection class IP on the front acc. to IEC 60529	IP20
--	------

Touch protection on the front acc. to IEC 60529	Finger-safe, for vertical contact from the front (screw and spring-type terminal)
---	--


Short-circuit protection

Main circuit


Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1	A	35	63	125	160
• Type of coordination "1"	A	20	35	63	80
• Type of coordination "2"	A	10	16	--	--

Type	3RT2516 S00	3RT2517 S00	3RT2518 S00	3RT2536 S2	3RT2537
Size					

Dimensions (W x H x D) ¹⁾	45 x 57.5 x 73 / 45 x 70 x 73	74.5 x 113.5 x 130 / 74.5 x 113.5 x 130
• with mounted auxiliary switch block	45 x 57.5 x 116 / 45 x 70 x 121	74.5 x 113.5 x 173.5 / 74.5 x 113.5 x 177.5



Type	3RT2526 S0
Size	
Dimensions (W x H x D) for AC operation ¹⁾²⁾	mm 60 x 85 x 97 / 60 x 101.5 x 97
• with mounted auxiliary switch block	mm 60 x 85 x 141 / 60 x 101.5 x 144
Dimensions (W x H x D) for DC operation ¹⁾²⁾	mm 60 x 85 x 107 / 60 x 101.5 x 107
• with mounted auxiliary switch block	mm 60 x 85 x 151 / 60 x 101.5 x 154



1) Dimensions for devices with screw terminals/spring-type terminals.

2) For size S0, devices for AC and DC operation differ in depth. The following applies: Depth (DC) = Depth (AC) + 10 mm.



Contactors for Special Applications

3RT25 contactors, 4-pole (2 NO + 2 NC), for switching motors

Type	3RT2516		3RT2517		3RT2518		3RT2526		3RT2535		3RT2536													
Size	S00						S0				S2													
Control circuit																								
Solenoid coil operating range																								
• AC operation	at 50 Hz		0.8 ... 1.1 x U_s		0.8 ... 1.1 x U_s		0.8 ... 1.1 x U_s		0.8 ... 1.1 x U_s															
	at 60 Hz		0.85 ... 1.1 x U_s				0.8 ... 1.1 x U_s		0.8 ... 1.1 x U_s		--													
• DC operation	up to 50 °C		0.8 ... 1.1 x U_s				--		--		--													
	up to 60 °C		0.85 ... 1.1 x U_s																					
• AC/DC operation			--									0.8 x U_{smin} ... 1.1 x U_{smax}												
Power consumption of the solenoid coils (for cold coil and 1.0 x U_s)																								
	see 3RT2316		see 3RT2317		see 3RT2326		see 3RT233																	
Operating times for 0.8 to 1.1 x U_s (Total break time = Opening delay + Arcing time)																								
	see 3RT2316		see 3RT2317		see 3RT2326		see 3RT233																	
Main circuit																								
Load rating with AC																								
Utilization category AC-1																								
Switching resistive loads																								
• Rated operational currents I_e	at 40 °C up to 690 V	A	18	22		40		60	70															
	at 60 °C up to 690 V	A	16	20		35		55	60															
• Rated power for AC loads	at 230 V	kW	6	7.5		13.3		21	23															
p.f. = 0.95 (at 60 °C)	400 V	kW	10.5	13		23		36	39															
• Minimum conductor cross-section for loads with I_e	at 40 °C	mm ²	2.5	2.5		10		16	25															
Utilization categories AC-2 and AC-3																								
• Rated operational currents I_e (at 60 °C)	NO up to 400 V	A	9	12	16	25	25	35	41															
	NC up to 400 V	A	9	9	9	25	20	35	41															
• Rated power for slipring or squirrel-cage motors at 50 and 60 Hz	NO at 230 V	kW	2.2	3	4	5.5	5.5	11																
	NC at 230 V	kW	2.2	2.2	2.2	5.5	5.5	11																
	NO at 400 V	kW	4	5.5	7.5	11	11	18.5	22															
	NC at 400 V	kW	4	4	4	11	7.5	18.5	22															
Load rating with DC																								
Utilization category DC-1																								
Switching resistive loads (L/R ≤ 1 ms)																								
• Rated operational currents I_e (at 60 °C)	up to 24 V	A	16	20		35		55	60															
- 1 conducting path	60 V	A	16	20		20		23																
	110 V	A	2.1	2.1		4.5		4.5																
	220 V	A	0.8	0.8		1		1																
	440 V	A	0.6	0.6		0.4		0.4																
- 2 conducting paths in series	up to 24 V	A	16	20		35		55																
	60 V	A	16	20		35		45																
	110 V	A	12	12		35		45																
	220 V	A	1.6	1.6		5		5																
	440 V	A	0.8	0.8		1		1																
Utilization category DC-3/DC-5²⁾																								
Shunt-wound and series-wound motors (L/R ≤ 15 ms)																								
• Rated operational currents I_e (at 60 °C)	up to 24 V	A	16	20		20		35																
- 1 conducting path	60 V	A	0.5	0.5		5		6																
	110 V	A	0.15	0.15		2.5		2.5																
	220 V	A	0.75	0.75		1		1																
	440 V	A	--	--		0.09		0.1																
- 2 conducting paths in series	up to 24 V	A	16	20		35		55																
	60 V	A	5	5		35		45																
	110 V	A	0.35	0.35		15		25																
	220 V	A	--	--		3		5																
	440 V	A	--	--		0.27		0.27																

¹⁾ Values for devices with AC and DC operation: for 3RT25 26 with DC operation, different values apply to AC-2 and AC-3 for the NC.

²⁾ For $U_s > 24$ V, the rated operational currents I_e for the NC contact conducting paths are 50 % of the values for the NO contact conducting paths.



Contactors for Special Applications


3RT16 capacitor contactors

Technical specifications

All technical specifications not mentioned in the table below are identical to those of the 3RT10 17 contactors for size S00, to

those of the 3RT10 26 contactors for size S0 and to those of the 3RT10 45 contactors for size S3.

Type	3RT16 17-.A..3	3RT16 27-.A..1	3RT16 47-.A..1
Size	S00	S0	S3
Dimensions (W x H x D) including auxiliary switches and connecting cables	45 x 101 x 105	45 x 100 x 130	70 x 167 x 183



General technical specifications	3RT16 17-.A..3	3RT16 27-.A..1	3RT16 47-.A..1	
Capacitor rating at rated power (utilization category AC-6b)	230 V, 50/60 Hz kvar 400 V, 50/60 Hz kvar 525 V, 50/60 Hz kvar 690 V, 50/60 Hz kvar	3 ... 7.5 5 ... 12.5 7.5 ... 15 10 ... 21	3.5 ... 15 6 ... 25 7.8 ... 30 10 ... 42	3.5 ... 30 5 ... 50 7.5 ... 60 10 ... 84
Auxiliary contacts mounted (unassigned)	1 NO + 1 NC	1 NO		
Auxiliary contacts mountable (lateral), not for sizes S00 and S0	--		2 NC + 2 NO or 1 NO + 1 NC	
Max. switching frequency	h ⁻¹	180	100	
Electrical endurance	Operating cycles	> 250000	> 150000	
Ambient temperature	°C	60		
Short-circuit protection		1.6 ... 2.2 x I_{e}		
Coil operating range		0.8 ... 1.1 x U_{s}		

Conductor cross-sections (1 or 2 conductors connectable)	Screw terminals		
Main conductors			
• Solid	mm ²	2 x (0.5 ... 1.5) ²⁾ , 2 x (0.75 ... 2.5) ²⁾ according to IEC 60947; max. 2 x (1 ... 4) ²⁾	2 x (1 ... 2.5) ²⁾ , 2 x (2.5 ... 6) ²⁾ according to IEC 60947; max. 1 x 10 ^{1/2)}
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5) ²⁾ , 2 x (0.75 ... 2.5) ²⁾	2 x (1 ... 2.5) ²⁾ , 2 x (2.5 ... 6) ^{1/2)}
• AWG cables	AWG	2 x (20 ... 16)	2 x (16 ... 12)
- Solid	AWG	2 x (18 ... 14)	2 x (14 ... 10)
- Solid or stranded	AWG	1 x 12	1 x 8
- Stranded			
• Terminal screws		M3	M4 (Pozidriv size 2)
- Tightening torque	Nm lb.in	0.8 ... 1.2 7 ... 10.3	2 ... 2.5 18 ... 22

¹⁾ 3RV19 25-5AB feeder terminal for 16 mm².

²⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.



Contactors and Contactor Assemblies

Contactors for Special Applications

3RT20 coupling relays (interface) for switching motors

More information

All technical specifications not mentioned in the table below are identical to those of the 3RT20 contactors for switching motors (see 2/135-2/137)

Contactors	Type	3RT20 1..HB4.	3RT20 1..JB4.	3RT20 1..KB4.	3RT20 2..KB4.
	Size	S00	S00	S00	S0
	Width	mm	45	45	45
General data					
Mechanical endurance	Operating cycles	30 million		10 million	
Protective separation between the coil and the main contacts acc. to EN 60947-1, Appendix N	V	400			
Control					
Solenoid coil operating range		0.7 ... 1.25 x U_s			
Power consumption of the solenoid coil	At U_s 17 V W	1.6		2.3	
(for cold coil)	24 V W	2.8		4.5	
Closing = Closed	30 V W	4.4		7	
Permissible residual current of the electronics (for 0 signal)		< 10 mA x (24 V/ U_s)		< 6 mA x (24 V/ U_s)	
Overvoltage configuration of the solenoid coil		Without overvoltage damping	With diode	With suppressor diode	With varistor
Operating times of the coupling contactors					
• Closing					
- At 17 V	ON-delay NO	ms	40 ... 130		70 ... 270
	OFF-delay NC	ms	30 ... 80		60 ... 250
- At 24 V	ON-delay NO	ms	35 ... 60		65 ... 90
	OFF-delay NC	ms	25 ... 40		55 ... 80
- At 30 V	ON-delay NO	ms	25 ... 50		52 ... 65
	OFF-delay NC	ms	15 ... 30		43 ... 57
• Closing at 17 ... 30 V	OFF-delay NO	ms	7 ... 20	38 ... 65	19 ... 21
	ON-delay NC	ms	20 ... 30	55 ... 75	25 ... 31

Contactors	Type	3RT20 1..1MB4..0KT0	3RT20 1..1VB4..	3RT20 1..1WB4..
	Size	S00	S00	S00
	Width	mm	45	45
General data				
Mechanical endurance	Operating cycles	30 million		
Protective separation between the coil and the main contacts acc. to EN 60947-1, Appendix N	V	400		
Control				
Solenoid coil operating range		0.85 ... 1.85 x U_s		
Power consumption of the solenoid coil	At U_s 24 V W	1.6		
(for cold coil)				
Closing = Closed				
Permissible residual current, upright mounting position		On request		
Overvoltage configuration of the solenoid coil		Without overvoltage damping	With diode	With suppressor diode
Operating times of the coupling contactors				
• Closing				
- At 20.5 V	ON-delay NO	ms	30 ... 120	
	OFF-delay NC	ms	20 ... 110	
- At 24 V	ON-delay NO	ms	25 ... 90	
	OFF-delay NC	ms	15 ... 80	
- At 44 V	ON-delay NO	ms	15 ... 60	
	OFF-delay NC	ms	10 ... 50	
• Opening	OFF-delay NO	ms	5 ... 20	5 ... 20
	ON-delay NC	ms	10 ... 30	10 ... 30

3TF68 and 3TF69 Vacuum contactors

Overview

Standards

IEC 60947-1, EN 60947-1,
IEC 60947-4-1, EN 60947-4-1,
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The 3TF68/69 contactors are climate-proof.

They are finger-safe according to EN 50274. Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices (see [Accessories and Spare Parts](#) on page 2/60).

Main contacts

Contact erosion indication with 3TF68/69 vacuum contactors

The contact erosion of the vacuum interrupters can be checked during operation with the help of 3 white double slides on the contactor base. If the distance indicated by one of the double slides is < 0.5 mm while the contactor is in the closed position, then the vacuum interrupter must be replaced. To ensure maximum reliability, it is recommended to replace all 3 vacuum interrupters simultaneously.

Auxiliary contacts

Contact reliability

These auxiliary contacts are particularly suitable for solid-state circuits with currents ≥ 1 mA at a voltage ≥ 17 V.

Electromagnetic compatibility

The 3TF68/69...C contactors for AC operation are fitted with an electronically controlled solenoid operating mechanism with a high interference immunity (for EMC values see page 3/115). The solenoid coil is connected to varistors for protection against overvoltages.

The 3TF68/69...Q... contactors for AC operation are designed for operation in systems with AC control supply voltage which is subject to strong interference. The solenoid systems of these contactors are configured in the DC economy circuit with rectification. The rectifier bridge is connected to varistors for protection against overvoltages.

Protection of the main current paths

An integrated RC varistor connection for the main current paths dampens the switching overvoltage rises to safe values. This prevents multiple restricting. It can therefore be assumed that the motor winding cannot be damaged by switching overvoltages with steep voltage rises.

Note:

During operation in installations in which the emitted interference limits cannot be observed, e.g. when used for output contactors in converters, 3TF68/69...Q contactors without a main current path circuit are recommended.

Technical specifications

Contactor	Type	3TF68 and 3TF69	
Rated data of the auxiliary contacts		Acc. to IEC 60947-5-1	
Rated insulation voltage U_i (pollution degree 3)	V	690	
Conventional thermal current $I_{th} =$ Rated operational current $I_e/AC-12$	A	10	
AC load			
Rated operational current $I_e/AC-15/AC-14$			
• For rated operational voltage U_e			
- At 24 V	A	10	
- At 110 V	A	10	
- At 125 V	A	10	
- At 220 V	A	6	
- At 230 V	A	5.6	
- At 380 V	A	4	
- At 400 V	A	3.6	
- At 500 V	A	2.5	
- At 660 V	A	2.5	
- At 690 V	A	2.3	
DC load			
Rated operational current $I_e/DC-12$			
• For rated operational voltage U_e			
- At 24 V	A	10	
- At 60 V	A	10	
- At 110 V	A	3.2	
- At 125 V	A	2.5	
- At 220 V	A	0.9	
- At 440 V	A	0.33	
- At 600 V	A	0.22	
Rated operational current $I_e/DC-13$			
• For rated operational voltage U_e			
- At 24 V	A	10	Auxiliary contacts with delayed NC contact: NS = No specification
- At 60 V	A	5	6
- At 110 V	A	1.14	NS
- At 125 V	A	0.98	0.98
- At 220 V	A	0.48	NS
- At 440 V	A	0.13	NS
- At 600 V	A	0.07	0.07
Rated data of the auxiliary contacts			
Rated voltage, max.	V AC	600	
Switching capacity		A 600, P 600	

3TF68 and 3TF69 Vacuum contactors


Contactor

Contact endurance of the auxiliary contacts

The contact endurance for utilization category AC-12 or AC-15/AC-14 depends mainly on the breaking current. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The characteristic curves apply to 230 V AC.

3TF68 and 3TF69

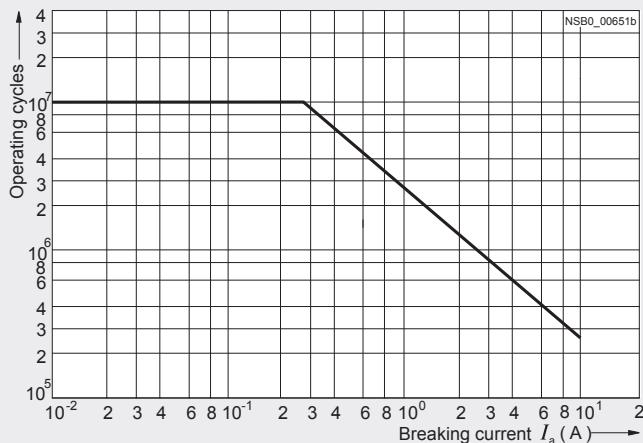

3TF68 and 3TF69

Contact erosion indication with vacuum contactors

The contact erosion of the vacuum interrupters can be checked during operation with the help of 3 white double slides on the contactor base.

If the distance indicated by one of the double slides is < 0.5 mm while the contactor is in the closed position, the vacuum interrupter must be replaced. To ensure maximum reliability, it is recommended to replace all 3 vacuum interrupters.

Contact endurance of the main contacts

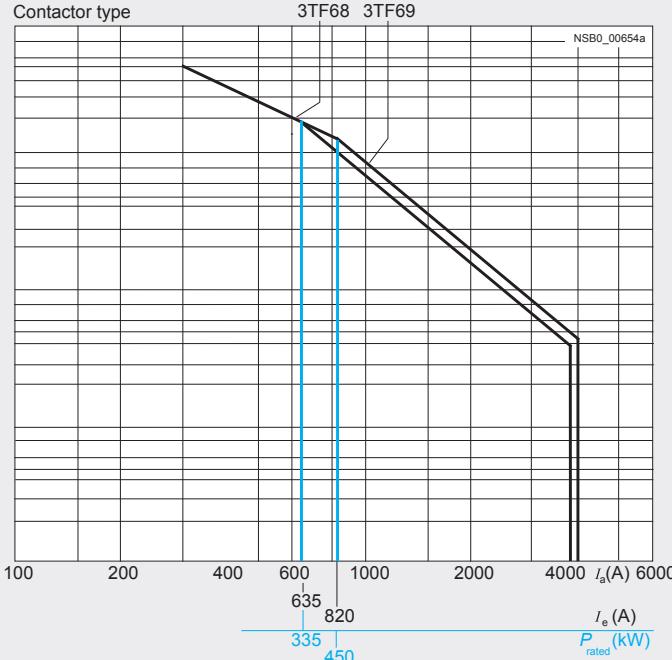
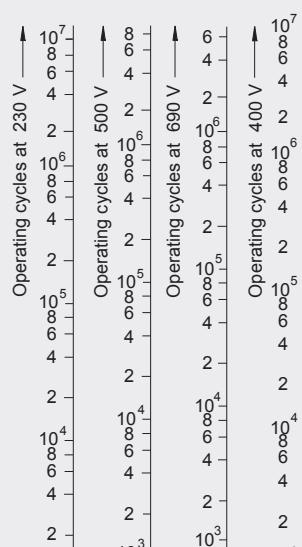



Diagram legend:

P_{rated} = Rated power for squirrel-cage motors at 400 V

I_a = Breaking current

I_e = Rated operational current

3TF68 and 3TF69 Vacuum contactors

Type				
Size				
Dimensions (W x H x D)	 mm			
3TF68	3TF69			
14	14	230 x 276 x 237	230 x 295 x 237	
General data				
Permissible mounting position, installation instructions¹⁾ ²⁾				
The contactors are designed for operation on a vertical mounting surface.				
Mechanical endurance	Operating cycles	5 million		
Electrical endurance	Operating cycles	³⁾		
Rated insulation voltage U_i (pollution degree 3)	kV	1		
Rated impulse withstand voltage U_{imp}	kV	8		
Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N	kV	1		
Mirror contacts	Yes, acc. to IEC 60947-4-1, Appendix F			
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact.				
One NC contact each must be connected in series for the right and left auxiliary switch block respectively.				
Permissible ambient temperature				
• During operation ⁵⁾	°C	-25 ... +55		
• During storage	°C	-55 ... +80		
Degree of protection acc. to IEC 60947-1, Appendix C	IP00/open (where applicable, use additional terminal covers)			
Touch protection acc. to EN 50274	Finger-safe with cover			
Shock resistance				
• Rectangular pulse	g/ms	8.1/5 and 4.7/10	9.5/5 and 5.7/10 8.6/5 and 5.1/10	
- AC operation		9/5 and 5.7/10		
- DC operation				
• Sine pulse	g/ms	12.8/5 and 7.4/10	13.5/5 and 7.8/10 13.5/5 and 7.8/10	
- AC operation		14.4/5 and 9.1/10		
Conductor cross-sections	See page 2/184.			
Electromagnetic compatibility (EMC)	See page 2/113.			
Short-circuit protection				
Main circuit				
Fuse links, gG operational class: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1				
• Type of coordination "1"	A	1000	1250	
• Type of coordination "2"	A	500	630	
• Weld-free ⁴⁾	A	400	500	
Auxiliary circuit				
• Short-circuit test with fuse links of gG operational class: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE with $I_k = 1$ kA acc. to IEC 60947-5-1	A	10		
• Test with miniature circuit breaker up to 230 V with C characteristic: Short-circuit current $I_k = 400$ A acc. to IEC 60947-5-1	A	10		

¹⁾ To easily replace the laterally mounted auxiliary switches it is recommended to maintain a minimum distance of 30 mm between the contactors.

²⁾ If mounted at a 90° angle (conducting paths are horizontally above each other), the switching frequency is reduced by 80% compared with the normal values.

³⁾ See "Endurance of the auxiliary contacts", page 2/180.

⁴⁾ Test conditions according to IEC 60947-4-1.

⁵⁾ For ambient temperatures > 55°C, only 3TF6.33-Q..-Z A02 contactors (= without connection of the main current path circuits) can be used. Then derating is also possible with these contactors:

- AC-1: $I_e = 782$ A, 644 operating cycles/h;
- AC-3: operating range 0.85-1.05 x U_s , 460 operating cycles/hour, mechanical endurance 5 million operating cycles, lateral clearance 10 mm

3TF68 and 3TF69 Vacuum contactors

Contactor	Type Size	3TF68 14	3TF69 14
Control			
Coil operating range			$0.8 \times U_s \text{ min} \dots 1.1 \times U_s \text{ max}$
Power consumption of the solenoid coils (when coil is cold and $1.0 \times U_s$)			
• AC operation, $U_s \text{ max}$	- Closing - Closed	VA/p.f. VA/p.f.	1850/1 49/0.15
• AC operation, $U_s \text{ min}$	- Closing - Closed	VA/p.f. VA/p.f.	1200/1 13.5/0.47
• DC economy circuit ¹⁾	- Closing at 24 V - Closed	W W	1010 28
For contactors of type 3TF68/69...-Q:			
• AC operation, $U_s \text{ min}$ ²⁾	- Closing - Closed	VA/p.f. VA/p.f.	1000/0.99 11/1
Operating times for $0.8 \dots 1.1 \times U_s$ (Total break time = Opening delay + Arcing time)			(Values apply to cold and warm coil)
• AC operation	- Closing delay - Opening delay	ms ms	70 ... 120 (22 ... 65) ³⁾ 70 ... 100
• DC economy circuit	- Closing delay - Opening delay	ms ms	76 ... 110 50
• Arcing time		ms	10 ... 15
For contactors of type 3TF68/69...-Q:			
• AC operation	- Closing delay - Opening delay	ms ms	35 ... 90 65 ... 90
Operating times for $1.0 \times U_s$ (Total break time = Opening delay + Arcing time)			
• AC operation	- Closing delay - Opening delay	ms ms	80 ... 100 (30 ... 45) ³⁾ 70 ... 100
• DC economy circuit	- Closing delay - Opening delay	ms ms	80 ... 90 50
Minimum command duration for closing	Standard Reduced make-time	ms ms	120 90
Minimum interval time between two ON commands	ms	100	300

¹⁾ At 24 V DC; for further voltages, deviations of up to $\pm 10\%$ are possible.²⁾ Including reversing contactor.³⁾ Values in brackets apply to contactors with reduced operating times.

Contactor	Type	3TF6...44-.CF7	3TF6...44-.CM7	3TF6...44-.CP7	3TF6...44-.CQ7	3TF6...44-.CS7
Electromagnetic compatibility						
Rated control supply voltage U_s	V AC	110 ... 132	200 ... 240	230 ... 277	380 ... 460	500 ... 600
Overvoltage type acc. to IEC 60801		Burst/Surge				
Degree of severity acc. to IEC 60801						
• Burst		3	4	4	4	4
• Surge		4	4	4	4	4
Overvoltage resistance						
• Burst	kV	2	4	4	4	4
• Surge	kV	6	5	5	6	6

3TF68 and 3TF69 Vacuum contactors

Contactor	Type Size	3TF68 14	3TF69 14
Main circuit			
AC capacity			
Utilization category AC-1			
Switching resistive loads			
• Rated operational currents I_e	At 40 °C up to 690 V At 55 °C up to 690 V At 55 °C up to 1000 V	A A A	700 630 450
	230 V 400 V 500 V 690 V 1000 V	kW kW kW kW kW	240 415 545 720 780
• Rated power for AC loads with p.f. = 0.95 at 55°C			910 850 800 323 558 735 970 1385
• Minimum conductor cross-sections for loads with I_e	At 40°C At 55°C	mm ² mm ²	2 x 240 2 x 185
Utilization categories AC-2 and AC-3			
• Rated operational currents I_e	Up to 690 V 1000 V	A A	630 435
• Rated power for slipring or squirrel-cage motors at 50 Hz and 60 Hz	At 230 V 400 V 500 V 690 V 1000 V	kW kW kW kW kW	200 347 434 600 600
Thermal load capacity			
	10 s current	A	5 040
Power loss per conducting path			
	At $I_e/AC-3$	W	45
Utilization category AC-4 (for $I_a = 6 \times I_e$)			
• Rated operational current I_e	Up to 690 V	A	610
• Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 400 V	kW	355
The following applies to a contact endurance of about 200000 operating cycles:			
• Rated operational currents I_e	Up to 690 V 1000 V	A A	300 210
• Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 230 V 400 V 500 V ¹⁾ 690 V ¹⁾ 1000 V ¹⁾	kW kW kW kW A	97 168 210 278 290
Switching frequency			
Switching frequency z in operating cycles/hour			
• Contactors without overload relays	No-load switching frequency AC No-load switching frequency DC AC-1 AC-2 AC-3 AC-4	1/h 1/h 1/h 1/h 1/h 1/h	2000 1000 700 200 500 150
• Contactors with overload relays (mean value)		1/h	15

¹⁾ Max. permissible rated operational current $I_e/AC-4 = I_e/AC-3$ up to 500 V, for reduced contact endurance and reduced switching frequency.

3TF68 and 3TF69 Vacuum contactors

Contactor	Type Size	3TF68 14	3TF69 14
Conductor cross-sections			
Main conductors:			 Screw terminals
• Busbar connections	mm ²	50 ... 240	50 ... 240
- Finely stranded with cable lug	mm ²	70 ... 240	50 ... 240
- Stranded with cable lug	AWG	2/0 ... 500 MCM	2/0 ... 500 MCM
- Solid or stranded	mm	50	60 ($U_e \leq 690$ V) 50 ($U_e > 690$ V)
- Connecting bar (max. width)			
• Terminal screw	Nm	M10 x 30	M12 x 40
- Tightening torque		14 ... 24 (124 ... 210 lb.in)	20 ... 35 (177 ... 310 lb.in)
• With box terminal ¹⁾			
- Connectable copper bars	mm	15 ... 25	15 ... 38
- Width	mm	1 x 26 or 2 x 11	1 x 46 or 2 x 18
- Max. thickness		A/F 6 (hexagon socket)	A/F 8 (hexagon socket)
- Terminal screw	Nm	25 ... 40	35 ... 50
- Tightening torque	lb.in	221 ... 354	266 ... 443
Auxiliary conductors:			
• Solid	mm ²	2 x (0.5 ... 1) ² /2 x (1 ... 2.5) ²	
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1) ² /2 x (0.75 ... 2.5) ²	
• Pin-end connector acc. to DIN 46231	mm ²	2 x (1 ... 1.5)	
• Solid or stranded	AWG	2 x (18 ... 12)	
• Tightening torque	Nm	0.8 ... 1.4	
	lb.in	7 ... 12	

1) See "Accessories and Spare Parts", page 2/60.

2) If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

Contactor	Type Size	3TF68 14	3TF69 14
➊ and ➋ rated data			
Rated insulation voltage			V AC 600
Uninterrupted current			820
• Open and enclosed	A	630	
Maximum horsepower ratings (➊ and ➋ approved values)			
• Rated power for induction motors at 60 Hz	hp	231	290
- At 200 V	hp	266	350
- At 230 V	hp	530	700
- At 460 V	hp	664	860
- At 575 V	hp		
NEMA/EEMAC ratings			
SIZE	hp	6	7
• Uninterrupted current	A	600	820
- Open	A	540	810
- Enclosed			
• Rated power for induction motors at 60 Hz	hp	150	--
- At 200 V	hp	200	300
- At 230 V	hp	400	600
- At 460 V	hp	400	600
- At 575 V	hp		
Overload relays			
• Setting range	Type A	3RB12 ... 200 ... 820	

3TC contactors

Overview

3TC4 and 3TC5

IEC 60947-1, EN 60947-1,
IEC 60947-4-1, EN 60947-4-1

The contactors are finger-safe according to EN 50274. Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices.

The DC motor ratings given in the tables are applicable to the DC-3 and DC-5 utilization categories with two-pole switching of the load or with the two conducting paths of the contactor connected in series.

One contactor conducting path can switch full power up to 220 V. The ratings for higher voltages are available on request.

3TC

IEC 60947-4-1, EN 60947-4-1.

The contactors are suitable for use in any climate. They are suitable for switching and controlling DC motors as well as all other DC circuits.

The solenoid excitation is configured for a particularly large operating range. It is between 0.7 or 0.8 to 1.2 $\times U_s$.

3TC74 contactors can be used at up to 750 V/400 A and 50 Hz in AC-1 operation.

Application

The contactors are suitable for switching and controlling DC motors as well as all other DC circuits.

A version with an especially large coil operating range is available for operation in electrically driven vehicles and in switch-gears with significant fluctuations in the actuating voltage

Technical specifications

Contactors	Type	3TC4 and 3TC7	3TC5
Rated data of the auxiliary contacts			
Rated insulation voltage U_i (pollution degree 3)	V	690	
Conventional thermal current I_{th} = Rated operational current $I_e/AC-12$	A	10	10
AC load			
Rated operational current $I_e/AC-15/AC-14$			
• For rated operational voltage U_e			
24 V	A	10	10
110 V	A	10	10
125 V	A	10	10
220 V	A	6	6
230 V	A	5.6	5.6
380 V	A	4	4
400 V	A	3.6	3.6
500 V	A	2.5	2.5
660 V	A	2.5	2.5
690 V	A	--	--
DC load			
Rated operational current $I_e/DC-12$			
• For rated operational voltage U_e			
24 V	A	10	10
60 V	A	10	10
110 V	A	3.2	8
125 V	A	2.5	6
220 V	A	0.9	2
440 V	A	0.33	0.6
600 V	A	0.22	0.4
Rated operational current $I_e/DC-13$			
• For rated operational voltage U_e			
24 V	A	10	10
60 V	A	5	5
110 V	A	1.14	2.4
125 V	A	0.98	2.1
220 V	A	0.48	1.1
440 V	A	0.13	0.32
600 V	A	0.07	0.21

3TC contactors

2

CONTACTORS AND ASSEMBLIES


Contactors	Type	3TC44 ... 3TC56
C and D rated data of the auxiliary contacts		
Rated voltage, max.	V AC	600
Switching capacity	A 600, P 600	

Contactors	Type	3TC44 ... 3TC78
Contact endurance of the main contacts		



3TC44 to 3TC56 contactors

Legend for the diagrams:

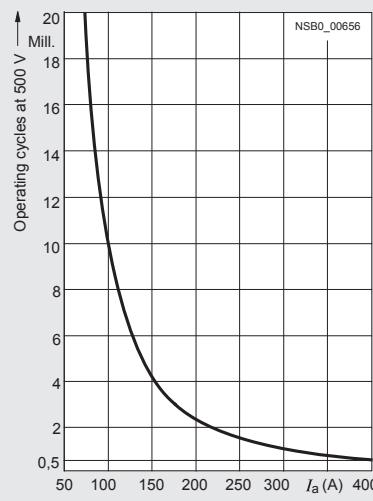 I_a = Breaking current

3TC74 and 3TC78 contactors

Contactors	Type	3TC44 2	3TC48 4	3TC52 8	3TC56 12
General technical specifications					
Permissible mounting positions					
The contactors are designed for operation on a vertical mounting surface.					
Mechanical endurance	Operating cycles	10 million			
Electrical endurance	Operating cycles	1)			
Rated insulation voltage U_i (pollution degree 3)	V	800		1000	
Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N	V	Up to 300		Up to 660	
Mirror contacts ²⁾		Yes, acc. to IEC 60947-4-1, Appendix F			
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact.					
Permissible ambient temperature					
• During operation	°C	-25 ... +55			
• During storage	°C	-50 ... +80			
Degree of protection acc. to IEC 60947-1, Appendix C		IP00/open, for AC operation, coil assembly IP40			
Shock resistance	Rectangular pulse	g/ms	7.5/5 and 3.4/10	10/5 and 5/10	12/5 and 5.5/10
Short-circuit protection					
Main circuit					
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE					
• Type of coordination "1"	A	50		160	
• Type of coordination "2"	A	35		63	
Auxiliary circuit				250	400
• Short-circuit test with fuse links of gG operational class: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k = 1$ kA acc. to IEC 60947-5-1	A		16		
• Test with miniature circuit breaker up to 230 V with C characteristic: Short-circuit current $I_k = 400$ A acc. to IEC 60947-5-1	A		10		

1) See the endurance diagram above.

2) For 3TC44, one NC contact each must be connected in series for the right and left auxiliary switch block respectively.



3TC contactors

Type	3TC44	3TC48	3TC52	3TC56
Size	2	4	8	12
Dimensions (W x H x D) • DC operation • AC operation	mm 70 x 85 x 141 70 x 85 x 100	mm 100 x 183 x 180 100 x 183 x 154	mm 135 x 238 x 232 135 x 238 x 200	mm 160 x 279 x 310 160 x 279 x 251
Control circuits				
Coil operating range	0.8 ... 1.1 x U_s			
Power consumption of the solenoid coils (for cold coil and 1.0 x U_s)				
• DC operation	- Closing = Closed W	10	19	30
• AC operation, 50 Hz coil	- Closing VA/p.f.	68/0.86	300/0.5	640/0.48
	- Closed VA/p.f.	10/0.29	26/0.24	46/0.23
• AC operation, 60 Hz coil	- Closing VA/p.f.	95/0.79	365/0.45	730/0.38
	- Closed VA/p.f.	12/0.3	35/0.26	56/0.24
• AC operation, 50/60 Hz coil	- Closing at 50 Hz/60 Hz VA/p.f.	79/73/0.83/0.78	--	--
	- Closed at 50 Hz/60 Hz VA/p.f.	11/9/0.28/0.27	--	--
Operating times (for 0.8 ... 1.1 x U_s) Total break time = Opening delay + Arcing time		(The values apply up to and including 20 % undervoltage, 10 % overvoltage, as well as when the coil is cold and warm)		
• DC operation	- Closing delay ms	35 ... 190	90 ... 380	120 ... 400
	- Opening delay ¹⁾ ms	10 ... 25	17 ... 28	22 ... 35
• AC operation	- Closing delay ms	10 ... 40	20 ... 50	20 ... 50
	- Opening delay ¹⁾ ms	5 ... 25	5 ... 30	10 ... 30
• Arcing time	- DC-1 ms	20		
	- DC-3/DC-5 ms	30		
Main circuit				
Load rating with DC				
Utilization category DC-1, switching resistive loads (L/R ≤ 1 ms)				
• Rated operational currents I_e (at 55 °C)	Up to U_e 750 V A	32	75	220
				400
• Minimum conductor cross-section	mm ²	6	25	95
• Rated power at U_e	At 220 V 440 V 600 V 750 V kW	7 14 19.2 24	16.5 33 45 56	48 97 132 165
				88 176 240 300
Utilization category DC-3 and DC-5 Shunt-wound and series-wound motors (L/R ≤ 15 ms)				
• Rated operational currents I_e (at 55 °C)	Up to 220 V 440 V 600 V 750 V A	32 29 21 7.5	75 75 75 75	220 220 220 170
				400 400 400 400
• Rated power at U_e	At 110 V 220 V 440 V 600 V 750 V kW	2.5 5 9 9 4	6.5 13 27 38 45	20 41 82 110 110
				35 70 140 200 250
Switching frequency				
Switching frequency z in operating cycles/hour				
AC/DC operation				
• With resistive load DC-1	h ⁻¹	1500	220	400
• For inductive load DC-3/DC-5	h ⁻¹	750	600	
Conductor cross-sections (1 or 2 conductors connectable)				
Main conductors:				
• Solid	mm ²	2 x (2.5 ... 10)	2 x (6 ... 16)	--
• Finely stranded with end sleeve	mm ²	2 x (1.5 ... 4)	--	--
• Stranded with cable lug	mm ²	2 x 16	2 x 35	2 x 120
• Pin-end connector acc. to DIN 46231	mm ²	2 x (1 ... 6)	--	--
• Busbars	mm	--	15 x 2.5	25 x 4
• Terminal screw	M5	M6	M10	2 x (25 x 3)
Auxiliary conductors:				
• Solid	mm ²	2 x (1 ... 2.5)		
• Finely stranded with end sleeve	mm ²	2 x (0.75 ... 1.5)		

¹⁾ The opening delay times can increase if the contactor coils are damped against voltage peaks. Only 3TC44 contactors are allowed to be fitted with diodes.




DC Contactors

3TC contactors

2

CONTACTORS AND ASSEMBLIES

Type
Design
Dimensions




3TC74
1-pole contactors
78 x 352 x 276

3TC78
2-pole contactors
160 x 366 x 290

General technical specifications

Permissible mounting positions

The contactors are designed for operation on a vertical mounting surface.



Mechanical endurance Operating cycles 30 million

Electrical endurance Operating cycles 1)

Rated insulation voltage U_i (pollution degree 3) V 1500

Rated impulse withstand voltage U_{imp} kV 8

Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N V 630

Permissible ambient temperature °C -25 ... +55

Degree of protection acc. to IEC 60947-1, Appendix C IP00/open

Short-circuit protection

Main circuit

Fuse links, operational class gG:

LV HRC, type 3NA

- Type of coordination "1"
- Type of coordination "2"

A
A

630

500

Auxiliary circuits

- Short-circuit test with fuse links of gG operational class: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k = 1 \text{ kA}$ acc. to IEC 60947-5-1

A
A

16

- Test with miniature circuit breaker up to 230 V with C characteristic: Short-circuit current $I_k = 400 \text{ A}$ acc. to IEC 60947-5-1

10

Control circuits

Coil operating range

• DC operation	At $U_c = 24 \text{ V}$	0.8 ... 1.2 x U_s
	At $U_c > 24 \text{ V}$	0.7 ... 1.2 x U_s
• AC operation	At $U_c = 24 \text{ V}$	0.7 ... 1.15 x U_s
	At $U_c > 24 \text{ V}$	0.7 ... 1.14 x U_s

Power consumption of the solenoid coils (when coil is cold and $1.0 \times U_s$)

• DC operation	Closing = Closed	W	46	92
• AC operation, 50 Hz	Closing, Closed	VA	80	160
			0.95	0.95

Operating times

(Total break time = Opening delay + Arcing time)

• AC and DC operation	- Closing delay	ms	60 ... 100	(The values apply up to and including 15 % undervoltage, 10 % overvoltage, as well as when the coil is cold and warm)
	- Opening delay	ms	20 ... 35	
• Arcing time at 0.06 ... 4 x I_e		ms	40 ... 70	

Main circuit

Load rating with DC

Utilization category DC-1, switching resistive loads ($L/R \leq 1 \text{ ms}$)

• Rated operational current $I_e/\text{DC-1}$ (at 55 °C)	A	500	500
• Minimum conductor cross-section	mm ²	2 x 150	2 x 150
• Rated power			
	At 220 V	kW	110
	440 V	kW	220
	600 V	kW	300
	750 V	kW	375
	1200 V	kW	—
	1500 V	kW	750
• Critical currents, without arc extinction	At 440 V	A	≤ 7
	600 V	A	≤ 13
	750 V	A	≤ 15
	≤ 800 V	A	—
	1200 V	A	≤ 7
	1500 V	A	≤ 13

Utilization categories DC-3 and DC-5, switching DC motors

Permissible rated current for regenerative braking At 110 ... 600 V A 400

Switching frequency

Switching frequency z in operating cycles/hour

AC/DC operation

• With resistive load DC-1	h ⁻¹	750	1000
• For inductive load DC-3/DC-5	h ⁻¹	500	500

1) Endurance see page 2/186..

2) See Selection and ordering data.

Accessories – 3RT1 contactors

Technical specifications

Contactor	Type	3RT19 26-2C	3RT19 26-2D	3RT19 26-2E	3RT19 26-2F	3RT19 26-2G
Solid-state timing relay blocks with semiconductor output						
General data						
Rated insulation voltage U_i Pollution degree 3 Overvoltage category III acc. to EN 60664-1	V AC	250				
Permissible ambient temperature						
• During operation	°C	-25 ... +60				
• During storage	°C	-40 ... +80				
Degree of protection acc. to EN 60947-1, Appendix C						
• Cover		IP40				
• Terminals		IP20				
Shock resistance Half-sine acc. to IEC 60068-2-27	g/ms	15/11				
Vibration resistance according to IEC 60068-2-6						
	Hz/mm	10 ... 55/0.35				
EMC tests						
Basic specification						
Conductor connections						
• Solid	mm ²	2 x (0.5 ... 1.5), 2 x (0.75 ... 4)				
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 2.5)				
• AWG cables, solid or stranded	AWG	2 x (18 ... 14)				
• Terminal screws		M3				
• Tightening torque	Nm lb.in	0.8 ... 1.2 7 ... 10.3				
Permissible mounting positions						
Control						
Operating range of excitation						
		0.8 ... 1.1 x U_s , 0.95 ... 1.05 times the rated frequency		0.85 ... 1.1 x U_s , 0.95 ... 1.05 times the rated frequency		
Rated power	W	1	2			
• Power consumption at 230 V AC, 50 Hz	VA	1	4			
Overvoltage protection						
Varistor integrated in timing relay						
Recovery time	ms	50	150			
Minimum ON period	ms	35	200 (with OFF-delay)			
Setting accuracy With reference to upper limit of scale	Typ. %	±15				
Repeat accuracy	Max. %	±1				
Load side						
Rated operational currents I_e						
• Load current	A	0.3		--		
• AC-15, 230 V, 50 Hz	A	--		3		
• DC-13, 24 V	A	--		1		
• DC-13, 110 V	A	--		0.2		
• DC-13, 230 V	A	--		0.1		
Short-time loading capacity	Up to 10 ms	A	10	--		
DIAZED protection gG operational class	A	--		4		
Residual current	Max. mA	5	--			
Voltage drop With conducting output	Max. VA	3.5	--			
Mechanical endurance	Operating cycles	100 x 10 ⁶		10 x 10 ⁶		
Switching frequency for load						
• With I_e at 230 V AC	h ⁻¹	200		2500		
• With 3RT20 16 contactor at 230 V AC	h ⁻¹	2500		5000		

Accessories – 3RT1 contactors



Accessories – 3RT1 contactors

Contactor	Type	3RH19 24, 3TX7 090 Coupling links for mounting on contactors acc. to IEC 60947/EN 60947
General data		
Rated insulation voltage U_i (pollution degree 3)	V	300
Protective separation between coil and contacts acc. to IEC 60947-1, Appendix N	V AC	Up to 300
Permissible ambient temperature		
• During operation	°C	-25 ... +60
• During storage	°C	-40 ... +80
Degree of protection acc. to IEC 60947-1, Appendix C		
• Connections		IP20
• Enclosure		IP40
Circuit diagram		
Conductor cross-sections		
• Solid	mm ²	2 x (0.5 ... 2.5)
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5)
Terminal screws		M3
Control side		
Rated control supply voltage U_s	V DC	24
Operating range	V DC	17 ... 30
Power consumption at U_s	W	0.5
Nominal current input	mA	20
Release voltage	V	≥ 4
Function display		Yellow LED
Protection circuit		Varistor
Load side		
Mechanical endurance	Operating cycles	20 x 10 ⁶
Electrical endurance at I_e	Operating cycles	1 x 10 ⁵
Switching frequency	Operating cycles h ⁻¹	5000
Make-time	ms	Approx. 7
Break-time	ms	Approx. 4
Bounce time	ms	Approx. 2
Contact material		AgSnO
Switching voltage	AC/DC V	24 ... 250
Permissible residual current of the electronics (with 0 signal)	mA	2.5



Control Relays

3RH2 control relays – size S00

Technical specifications

Contactor relays	Type Size	3RH2 S00
Permissible mounting positions		
The contactor relays are designed for operation on a vertical mounting surface.		 NSB0_00478c NSB0_00477a
Upright mounting position		
Positively-driven operation of contacts in contactor relays <p>3RH2: Yes, in the basic unit and the auxiliary switch block as well as between the basic unit and the front-mounted auxiliary switch block (removable) acc. to: • ZH 1/457 • IEC 60947-5-1, Appendix L</p> <p>3RH22: Yes, in the basic unit and the auxiliary switch block as well as between the basic unit and the snap-on auxiliary switch block (permanently mounted) acc. to: • ZH 1/457 • IEC 60947-5-1, Appendix L</p> <p>Note: 3RH29 11-.NF. solid-state compatible auxiliary switch blocks have no positively-driven contacts.</p>		
Contact reliability Contact reliability at 17 V, 1 mA acc. to IEC 60947-5-4		
Contact endurance for AC-15/AC-14 and DC-13 utilization categories The contact endurance is mainly dependent on the breaking current. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system. If magnetic circuits other than the contactor coil systems or solenoid valves are present, e.g. magnetic brakes, protective measures for the load circuits are necessary, e.g. in the form of RC elements and free-wheel diodes. The characteristic curves apply to: • 3RH21/3RH22 contactor relays • 3RH24 latched contactor relays • 3RH29 11 auxiliary switch blocks ¹⁾ • Auxiliary switch blocks for snapping onto the front, max. 4-pole and for mounting onto the side in size S00		
 NSB0_02061a		
Diagram legend: I_a = Breaking current I_e = Rated operational current		

¹⁾ $I_e = 6$ A for AC-15/AC-14.



Control Relays

3RH2 control relays – size S00

Type			
Size			
Dimensions (W x H x D) with screw terminals			
• With mounted auxiliary switch block			
		mm	mm
		3RH21	3RH22
		S00	S00
		45 x 57.5 x 73	--
		45 x 57.5 x 116	45 x 57.5 x 116
		--	--
General technical specifications			
Mechanical endurance			
• Basic units	Operating cycles	30 million	5 million
• Basic unit with snap-on auxiliary switch block	Operating cycles	10 million	
• Solid-state compatible auxiliary switch block	Operating cycles	5 million	
Rated insulation voltage U_i (pollution degree 3)			
	V	690	
Rated impulse withstand voltage U_{imp}			
	kV	6	
Protective separation between the coil and the contacts in the basic unit acc. to IEC 60947-1, Appendix N			
	V	400	
Permissible ambient temperature			
• During operation	°C	-25 ... +60	
• During storage	°C	-55 ... +80	
Protection class IP on the front acc. to IEC 60529			
		IP20, coil assembly IP40	
Touch protection on the front acc. to IEC 60529			
		Finger-safe, for vertical contact from the front (screw and spring-type terminal)	
Shock resistance			
• Rectangular pulse	- AC operation - DC operation	g/ms	7.3/5 and 4.7/10 >10/5 and >5/10
• Sine pulse	- AC operation - DC operation	g/ms	11.4/5 and 7.3/10 >15/5 and >8/10
		g/ms	
Short-circuit protection			
• Short-circuit test with fuse links of gG operational class: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k = 1 \text{ kA}$ acc. to IEC 60947-5-1	A	10	
• Test with miniature circuit breaker up to 230 V with C characteristic: Short-circuit current $I_k = 400 \text{ A}$ acc. to IEC 60947-5-1	A	6	
Conductor cross-sections			
Auxiliary conductors and coil terminals (1 or 2 conductors can be connected)			
• Solid	mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾ according to IEC 60947; max. 2 x (0.5 ... 4)	
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾	
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) ¹⁾ ; 2 x (18 ... 14) ¹⁾	
• Terminal screw	Nm	M3 (for standard screwdriver size 2 or Pozidriv 2) 0.8 ... 1.2 (7 ... 10.3 lb.in.)	
Auxiliary conductors and coil terminals (1 or 2 conductors can be connected)			
• Operating devices	mm	3.0 x 0.5; 3.5 x 0.5	
• Solid	mm ²	2 x (0.5 ... 2.5)	
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5)	
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 2.5)	
• AWG cables, solid or stranded	AWG	2 x (20 ... 12)	
Auxiliary conductors for front and laterally mounted auxiliary switches			
• Operating devices	mm	3.0 x 0.5; 3.5 x 0.5	
• Solid	mm ²	2 x (0.5 ... 2.5)	
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5)	
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 2.5)	
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)	
Auxiliary conductor and coil terminals			
• Terminal screw	mm	M3, Pozidriv size 2	
• Operating devices	Nm	Ø 5 ... 6	
• Tightening torque	mm	0.8 ... 1.2	
• Usable ring terminal lugs	mm	d ₂ = min. 3.2	
- DIN 46234 without insulation sleeve	mm	d ₃ = max. 7.5	
- DIN 46225 without insulation sleeve			
- DIN 46237 with insulation sleeve			
- JIS C2805 Type R without insulation sleeve			
- JIS C2805 Type RAV with insulation sleeve			
- JIS C2805 Type RAP with insulation sleeve			
			
Screw terminals			
Spring-type terminals			
Ring terminal lug connection			

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

Tool for opening the spring-type terminals
see [Accessories, page 2/85](#).

Note:
Max. external diameter of the cable insulation: 3.6 mm.

An insulation stop must be used for conductor cross-sections $\leq 1 \text{ mm}^2$, see [Accessories, page 2/85](#).



Control Relays

3RH2 control relays – size S00

Contactor relays	Type Size	3RH2. S00
Control circuits		
Coil operating range		
• AC operation	At 50 Hz At 60 Hz	0.8 ... 1.1 x U_s 0.85 ... 1.1 x U_s
• DC operation	At +50 °C At +60 °C	0.8 ... 1.1 x U_s 0.85 ... 1.1 x U_s
Power consumption of the solenoid coils (when coil is cold and 1.0 x U_s)		
• AC operation, 50 Hz	VA/p.f. VA/p.f.	37/0.8 5.7/0.25
• AC operation, 60 Hz	VA/p.f. VA/p.f.	33/0.75 4.4/0.25
• DC operation (closing = closed)	W	4.0
Permissible residual current of the electronics (with 0 signal)		
• For AC operation ¹⁾ • For DC operation		< 4 mA x (230 V/ U_s) < 10 mA x (24 V/ U_s)
Operating times²⁾		
Total break time = OFF-delay + Arcing time Values apply with coil in cold state and at operating temperature for operating range		
<u>AC operation</u>		
• Closing		
- ON-delay of NO contact	With 0.8 ... 1.1 x U_s With 1.0 x U_s	ms ms
	3RH24 minimum operating time	ms ms
- OFF-delay of NC contact	With 0.8 ... 1.1 x U_s With 1.0 x U_s	ms ms
	3RH24 minimum operating time	ms ms
• Opening		
- OFF-delay of NO contact	With 0.8 ... 1.1 x U_s With 1.0 x U_s	ms ms
	3RH24 minimum operating time	ms ms
- ON-delay of NC contact	With 0.8 ... 1.1 x U_s With 1.0 x U_s	ms ms
	3RH24 minimum operating time	ms ms
<u>DC operation</u>		
• Closing		
- ON-delay of NO contact	With 0.8 ... 1.1 x U_s With 1.0 x U_s	ms ms
	3RH24 minimum operating time	ms ms
- OFF-delay of NC contact	With 0.8 ... 1.1 x U_s With 1.0 x U_s	ms ms
	3RH24 minimum operating time	ms ms
• Opening		
- OFF-delay of NO contact	With 0.8 ... 1.1 x U_s With 1.0 x U_s	ms ms
	3RH24 minimum operating time	ms ms
- ON-delay of NC contact	With 0.8 ... 1.1 x U_s With 1.0 x U_s	ms ms
	3RH24 minimum operating time	ms ms
• Arcing time		
Dependence of the switching frequency z' on the operational current I' and operational voltage U :		
$z' = z \cdot I_e / I' \cdot (U_e / U)^{1.5} \cdot 1/h$		

¹⁾ The 3RT29 16-1GA00 additional load module is recommended for higher residual currents (see page 2/80).

²⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, varistor +2 to 5 ms).



Coupling Relays

3RH2 control relays – size S00

Contactor relays	Type Size	3RH2. S00
Load side		
AC capacity		
Rated operational currents I_e		
AC-12	A	10
AC-15/AC-14 for rated operational voltage U_s		
Up to 230 V	A	6
400 V	A	3
500 V	A	2
690 V	A	1
Load rating with DC		
Rated operational currents I_e		
DC-12 for rated operational voltage U_s		
• 1 conducting path	24 V A	6
	60 V A	6
	110 V A	3
	220 V A	1
	440 V A	0.3
	600 V A	0.15
• 2 conducting paths in series	24 V A	10
	60 V A	10
	110 V A	4
	220 V A	2
	440 V A	1.3
	600 V A	0.65
• 3 conducting paths in series	24 V A	10
	60 V A	10
	110 V A	10
	220 V A	3.6
	440 V A	2.5
	600 V A	1.8
DC-13 for rated operational voltage U_s		
• 1 conducting path	24 V A	6
	60 V A	2
	110 V A	1
	220 V A	0.3
	440 V A	0.14
	600 V A	0.1
• 2 conducting paths in series	24 V A	10
	60 V A	3.5
	110 V A	1.3
	220 V A	0.9
	440 V A	0.2
	600 V A	0.1
• 3 conducting paths in series	24 V A	10
	60 V A	4.7
	110 V A	3
	220 V A	1.2
	440 V A	0.5
	600 V A	0.26
Switching frequency		
Switching frequency z in operating cycles/hour		
• For rated operation	AC-12/DC-12	h^{-1}
For utilization category	AC-15/AC-14	1000
	DC-13	h^{-1}
• No-load switching frequency		10000
Dependence of the switching frequency z on the operational current I' and operational voltage U :		
$z' = z \cdot I_e / I' \cdot (U_e / U)^{1.5} \cdot 1/h$		

④ and ⑤ rated data**Basic units and auxiliary switch blocks**

• Rated control supply voltage	V AC	max. 600
• Rated voltage	V AC	600
• Switching capacity		A 600, Q 600
• Uninterrupted current at 240 V AC	A	10



Control Relays

SIRIUS 3RH21 coupling relays for switching auxiliary circuits, 4-pole

Technical specifications

All technical specifications not mentioned in the table below are identical to those of the 3RH21 contactor relays (see page 5/6).

Contactor type	3RH21 ...HB40	3RH21 ...JB40	3RH21 ...KB40
Size	S00	S00	S00
Control circuits			
Coil operating range	0.7 ... 1.85 x U_s		
Power consumption of the solenoid coil (for cold coil) Closing = Closed			
• At U_s = 17 V	W	1.4	
• At U_s = 24 V	W	2.8	
• At U_s = 30 V	W	4.4	
Permissible residual current of the electronics for 0 signal	< 10 mA x (24 V/ U_s)		
Overvoltage configuration of the solenoid coil	No overvoltage damping 	With diode 	With suppressor diode
Operating times			
• Closing at 17 V	ms	40 ... 130	
- ON-delay NO	ms	30 ... 80	
- OFF-delay NC			
• At 24 V	ms	35 ... 60	
- ON-delay NO	ms	25 ... 40	
- OFF-delay NC			
• At 30 V	ms	25 ... 50	
- ON-delay NO	ms	15 ... 30	
- OFF-delay NC			
• Opening at 17 ... 30 V	ms	7 ... 20	38 ... 65
- OFF-delay NO	ms	20 ... 30	55 ... 75
- ON-delay NC			
Upright mounting position	Request required		
Contactor type	3RH21 ...MB40-OKT0	3RH21 ...VB40	3RH21 ...WB40
Size	S00	S00	S00
Control circuits			
Coil operating range	0.85 ... 1.85 x U_s		
Power consumption of the solenoid coil (for cold coil) Closing = Closed at U_s = 24 V	W	1.6	
Permissible residual current of the electronics for 0 signal	< 8 mA x (24 V/ U_s)		
Overvoltage configuration of the solenoid coil	Diode, varistor or RC element, attachable 	Built-in diode 	Built-in suppressor diode
Control circuits			
Operating times			
• Closing at 20.5 V	ms	30 ... 120	
- ON-delay NO	ms	20 ... 110	
- OFF-delay NC			
• At 24 V	ms	25 ... 90	
- ON-delay NO	ms	15 ... 80	
- OFF-delay NC			
• At 44 V	ms	15 ... 60	
- ON-delay NO	ms	10 ... 50	
- OFF-delay NC			
• Closing at 17 ... 30 V	ms	5 ... 20	20 ... 80
- OFF-delay NO	ms	10 ... 30	30 ... 90
- ON-delay NC			
Upright mounting position	Request required		



Contactors and Contactor Assemblies

3RT Contactors

3RT2 and 3RH2 contactors and relays

Terminal designations and identification numbers for auxiliary contacts

Terminal designations

The terminal designations are 2-digit, e.g. 13, 14, 21, 22:

- Tens digit: Sequence digit
 - Related terminals have the same sequence digit
- Units digit: Function digit
 - 1-2 for normally closed contacts (NC)
 - 3-4 for normally open contacts (NO)

Identification numbers

The identification number indicates the number and type of the auxiliary contacts, e.g. 40, 31, 22, 13:

- 1st digit: number of normally open contacts (NO)
- 2nd digit: number of normally closed contacts (NC)

Examples:

- 31 = 3 NO + 1 NC
- 40 = 4 NO

Selection guide for mountable auxiliary switch blocks for power contactors and contactor relays

The auxiliary switch blocks of the 3RH29 series for mounting on the front and side can be used for power contactors as well as for contactor relays.

The possible combinations of basic unit and mounted auxiliary switch block can be found in the tables below.

Where the columns and lines intersect (blue and green in the example) you will find the identification number for the combination of basic unit (column) and auxiliary switch block (line).

		3-pole contactors			Order No.
Auxiliary contacts	Version	3RT20 1 S00	3RT20 1 S00	3RT20 2 S0	
NO NC		10	01	11	
		13	21	13 21	
		14	22	14 22	
		2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	
		According to EN 50012 ¹⁾			
Auxiliary switches without NO contact					
-- 1		.1	11	02	12
		.1			
		.2			
-- 2		.1 .1	12	03	13
		.1			
		.2 .2			
-- 3		.1 .1 .1	13	04	14
		.1			
		.2 .2 .2			
-- 4		.1 .1 .1 .1	14	--	
		.1			
		.2 .2 .2 .2			
Auxiliary switch with 1 NO contact					
1 --		.3	20	11	21
		.4			
1 1		.1 .3	21	12	22
		.1			
		.2 .4			

1) Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.

Type	Example 1	Example 2
3RT20 motor contactor, S00 with 1 NO	3RT20 motor contactor, S0 with 1 NO + 1 NC	
Sequence digit	2. 3. 4. 5.	3. 4. 5. 6.
Type	Auxiliary switch with 4 NC, 3RH29 11-FA04	Auxiliary switch with 3 NC, 3RH29 11-HA03
Function digit	.1 .1 .1 .1 .2 .2 .2 .2	.1 .1 .1 .2 .2 .2
Type	3RT20 motor contactor, S00 with auxiliary switch block	3RT20 motor contactor, S0 with auxiliary switch block
Terminal design.	13 21 31 41 51 14 22 32 42 52	13 21 31 41 51 14 22 32 42 52
Type	Ident. No. 14	Ident. No. 14

3RT Contactors

3RT2 and 3RH2 contactors and relays

Additional auxiliary switch blocks



1) Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.



3RT Contactors

3RT2 and 3RH2 contactors and relays

Additional auxillary switch blocks

Auxiliary contacts Version NO NC	3-pole contactors			4-pole contactors				Contactor relays			Order No.
	S00 3RT20 1 10	S0 3RT20 1 01	S0 3RT20 2 11	S00 3RT23 1 --	S0/S2 3RT25 1 --	S0/S2 3RT23 11	S0/S2 3RT25 11	S00 3RH21, 3RH24 40E	S00 3RH21, 3RH24 31E	S00 3RH21, 3RH24 22E	
	2. 3. 4. 5. 5. 6. 7. 8. 3. 4. 5. 6.			1. 2. 3. 4. 1. 2. 3. 4. 3. 4. 5. 6. 3. 4. 5. 6.				5. 6. 7. 8. 5. 6. 7. 8. 5. 6. 7. 8.			
	According to EN 50012 ¹⁾			According to EN 50012 ¹⁾				According to EN 50011 ¹⁾			

Front auxillary switches with 3 NO contacts

3 --	40 31 41	30 30 41 41	70 61 52	3RH29 11.-HA30
3 1	41 32 42	31 31 42 42	71X 62X 53X	3RH29 11.-HA31

Front auxillary switches with 4 NO contacts

4 --	50 41 51	40 40 51 51	80E 71X 62X	3RH29 11.-FA40
	Acc. to EN 50005		Acc. to EN 50005	

Front auxillary switches with make-before-break

-- 1	21 12 22	11 11 22 22	51 42 33	3RH29 11.-FB11
-- 2	32 23 33	22 22 33 --	62 53 44	3RH29 11.-FB22
-- 3	32 23 33	22 22 33 --	62 53 44	3RH29 11.-FC22

Front auxillary switches with complete inscription²⁾

1 --	20 11 21	10 10 21 21	50 41 32	3RH29 11-1AA10
1 --	20 11 21	10 10 21 21	50 41 32	3RH29 11-1BA10
-- 1	11 02 12	01 01 12 12	41 32 23	3RH29 11-1AA01
-- 1	11 02 12	01 01 12 12	41 32 23	3RH29 11-1BA01
1 1	21 12 22	11 11 22 22	51 42 33	3RH29 11-1LA11
1 1	21 12 22	11 11 22 22	51 42 33	3RH29 11-1MA11
2 --	30 21 31	20 20 31 31	60 51 42	3RH29 11-1LA20
2 --	30 21 31	20 20 31 31	60 51 42	3RH29 11-1MA20

1) Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.

2) Terminals from the top or bottom.



3RT Contactors

3RT2 and 3RH2 contactors and relays

Additional auxillary switch blocks

Auxiliary contacts Version NO NC	3-pole contactors			4-pole contactors				Contactor relays				Order No.
	S00 3RT20 1	3RT20 1	S0 3RT20 2	S00 3RT23 1	3RT25 1	S0/S2 3RT23	3RT25	S00 3RH21, 3RH24 40E	31E	22E		
13 21 14 22	13 21 14 22	13 21 14 22	13 21 14 22	13 21 14 22	13 21 14 22	13 21 14 22	13 23 33 43 14 24 34 44	13 21 33 43 14 22 34 44	13 21 31 43 14 22 32 44			
2. 3. 4. 5. 5. 6. 7. 8. 3. 4. 5. 6. Acc. to EN 50005	2. 3. 4. 5. 5. 6. 7. 8. 3. 4. 5. 6. Acc. to EN 50005	2. 3. 4. 5. 5. 6. 7. 8. 3. 4. 5. 6. According to EN 50011 ¹⁾										

Front auxiliary switches with complete inscription (for contactor relays)												
4 --		53 63 73 83 54 64 74 84	--	--	--	--	--	--	80E	--	--	3RH29 11-GA40
3 1		53 61 73 83 54 62 74 84	--	--	--	--	--	--	71E	--	--	3RH29 11-GA31
2 2		53 61 71 83 54 62 72 84	--	--	--	--	--	--	62E	--	--	3RH29 11-GA22
1 3		53 61 71 81 54 62 72 82	--	--	--	--	--	--	53E	--	--	3RH29 11-GA13
-- 4		51 61 71 81 52 62 72 82	--	--	--	--	--	--	44E	--	--	3RH29 11-GA04

Front auxiliary switches with complete inscription, special version													
4 --		53 63 73 83 54 64 74 84	50	41	51	40	40	51	51	80E	71X	62X	3RH29 11-XA40 -OMA0
3 1		53 61 73 83 54 62 74 84	41	32	42	31	31	42	42	71E	62X	53	3RH29 11-XA31 -OMA0
2 2		53 61 71 83 54 62 72 84	32	23	33	22	22	33	--	62E	53	44X	3RH29 11-XA22 -OMA0
-- 4		51 61 71 81 52 62 72 82	14	--	--	--	--	--	--	44E	--	--	3RH29 11-XA04 -OMA0

Front auxiliary switches, Solid-state compatible													
-- 2		.1 .2	12	03	13	02	02	13	--	42	33	24	3RH29 11-NF02
1 1		.3 .4	21	12	22	11	11	22	22	51	42	33	3RH29 11-NF11
2 --		.3 .4	30	21	31	20	20	31	31	60	51	42	3RH29 11-NF20

¹⁾ Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.



3RT Contactors

3RT2 and 3RH2 contactors and relays

Additional auxillary switch blocks

Auxiliary contacts		3-pole contactors			4-pole contactors			Contactor relays			Order No.
Version	NO NC	S00 3RT20 1	3RT20 1	S0 3RT20 2	S00 3RT23 1	3RT25 1	S0/S2 3RT23	3RT25 11	31E	22E	
		10	01	11	--	--	13 21 14 22	13 21 14 22	13 21 14 22	13 21 14 22	13 21 14 22
		2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	1. 2. 3. 4.	1. 2. 3. 4.	3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8
		Left	Right		According to EN 50012 ¹⁾		According to EN 50012 ¹⁾		According to EN 50011 ¹⁾		

Lateral auxiliary switches for size S00

-- 2		12	--	--	02	02	--	--	--	--	3RH29 11-.DA02
-- 2		14	--	--	--	--	--	--	--	--	3RH29 11-.DA02
1 1		21	--	--	11	11	--	--	--	--	3RH29 11-.DA11
1 1		32	--	--	22	22	--	--	--	--	3RH29 11-.DA11
2 --		30	--	--	20	20	--	--	--	--	3RH29 11-.DA20
2 --		50	--	--	40	40	--	--	--	--	3RH29 11-.DA20
2 --		41	--	--	31	31	--	--	--	--	3RH29 11-.DA20 + 3RH29 11-.DA11
1 1											
2 --		32	--	--	22	22	--	--	--	--	3RH29 11-.DA20 + 3RH29 11-.DA02
-- 2											
1 1		23	--	--	13	--	--	--	--	--	3RH29 11-.DA11 + 3RH29 11-.DA02
-- 2											

Lateral auxiliary switches for size S0

-- 2		12	03	13	02	02	13	--	--	--	3RH29 21-.DA02
-- 2		14	--	--	--	--	--	--	--	--	3RH29 21-.DA02
1 1		21	12	22	11	11	22	22	--	--	3RH29 21-.DA11
1 1		32	23	33	22	22	33	--	--	--	3RH29 21-.DA11
2 --		30	21	31	20	20	31	31	--	--	3RH29 21-.DA20
2 --		50	41	51	40	40	51	51	--	--	3RH29 21-.DA20

¹⁾ Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.



3RT Contactors

3RT2 and 3RH2 contactors and relays

Additional auxillary switch blocks

Auxiliary contacts Version NO NC	3-pole contactors			4-pole contactors				Contactor relays			
	S00 3RT20 1	3RT20 1	S0 3RT20 2	S00 3RT23 1	3RT25 1	S0/S2 3RT23	3RT25 3RT25	S00 3RH21, 3RH24	40E	31E	22E
	10	01	11	--	--	11	11				
											
											
											
	2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	1. 2. 3. 4.	1. 2. 3. 4.	3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8	According to EN 50011 ¹⁾
Left	Right	According to EN 50012 ¹⁾			According to EN 50012 ¹⁾			According to EN 50011 ¹⁾			Order No.

2

CONTACTORS AND ASSEMBLIES

Lateral auxiliary switches for contactor relays

-- 2		-- -- --	-- -- -- --	42Z	33X	24	3RH29 21.-DA02
1 1		-- -- --	-- -- -- --	51X	42X	33X	3RH29 21.-DA11
2 --		-- -- --	-- -- -- --	60Z	51X	42X	3RH29 21.-DA20

Lateral auxiliary switches, Solid-state compatible for size S00

1	1		23 31	21	--	--	11	11	--	--	--	--	--	3RH29 11-2DE11
1	1		41 53	23 31	32	--	--	22	22	--	--	--	--	3RH29 11-2DE11

Lateral auxiliary switches. Solid-state compatible for size S0, S00

1	1		33 41	21	12	22	11	11	22	22	--	--	--	3RH29 21-2DE11
1	1		51 63	32	23	33	22	22	33	--	--	--	--	3RH29 21-2DE11

Lateral auxiliary switches. Solid-state compatible for contactor relays

1 1 | 51 63 | -- -- -- | -- -- -- -- | 51X 42X 33X 3RH29 21-DE11

1) Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.



Contactors and Contactor Assemblies

3RT Contactors


3RT1 contactors and accessories

Internal circuit diagrams (applicable to screw, spring and ring lug connection)

Sizes S3 to S12

Terminal designations according to EN 50 012

3RT10 4 to 3RT10 7, 3RT12, 3RT14 contactors

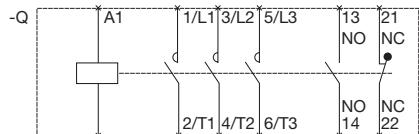


3RT10 4 to 3RT10 7, 3RT14 contactors

With 3RH19 21- HA22 4-pole auxiliary contact block, mountable on the front

2 NO + 2 NC

Ident. no. 22E



3RT1. 5, 3RT1. 6, 3RT1. 7 contactors (sizes S6, S10, S12)

With 3RH19 21-1DA11 2-pole auxiliary switch blocks, laterally mountable


2 NO + 2 NC



3RH19 21- . HA..-XA..4-pole auxiliary switch blocks, for snapping onto the front²⁾


3 NO + 1 NC

Ident. no. 31




2 NO + 2 NC

Ident. no. 22




2 NO + 2 NC

Ident. no. 22



1 NO + 3 NC


Ident. no. 13



3RH19 21- . DA11, 3RH19 21-2DE11 first laterally mountable auxiliary switch block (solid-state compatible)


1 NO + 1 NC

left



1 NO + 1 NC

right




3RH19 21- . JA11, 3RH19 21-2JE11 second laterally mountable auxiliary switch block (solid-state compatible)

(only for sizes S3 to S12)


1 NO + 1 NC

left



1 NO + 1 NC

right



Surge suppressor (plug-in direction coded; exception: marked +/- for 3RT19 16-1T... diode assembly) for sizes S2 to S3

Diode



Diode assembly



Varistor



RC element



Diode with LED



Varistor with LED



1) 3RH29 auxiliaries are intended to be used only with 3RT2 or 3RH2 base devices.

3RH19 auxiliaries are intended to be used only with 3RT1 or 3RH1 base devices.


2) Not for 3RT12, vacuum contactors

Contactors with 4 main contacts, sizes S3


Terminal designations acc. to EN 50 005

3RT13/23 and 3RT15/25 contactors

4 NO




2 NO + 2 NC




(3RH19 21 auxiliary switch blocks acc. to EN 50 005 can be snapped on)

3RT26 capacitor contactors

Size S00

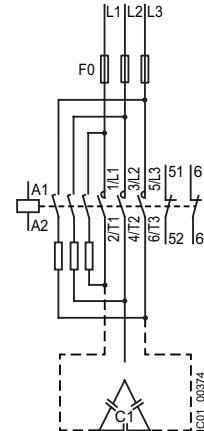

Sizes S0 and S2

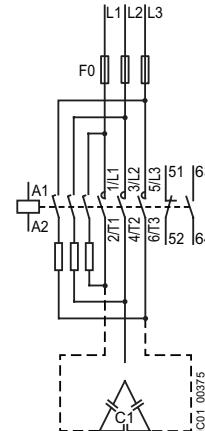



Contactors and Contactor Assemblies

3RT1 Contactors

3RT1 contactors and accessories


Internal circuit diagrams (applicable to screw connection and Spring-type terminal connection)

Accessories for size S6¹⁾ to S12 contactors

Terminal designations acc. to EN 50 005


3RH19 21-F..., 4-pole,
for snapping onto the front¹⁾

4 NO
Ident. no. 40




3 NO + 1 NC

31




2 NO + 2 NC

22




4 NC

04



2 NO + 2 NC

22 U



make-before-break

3RH19 21-CA.. auxiliary switch blocks, single-pole,
for snapping onto the front²⁾

1 NO



1 NC



1 NO



1 NC



(terminal designations according to EN 50 005 or
EN 50 012)

Accessories for size S0 to S12 contactors
Terminal designations acc. to EN 50 005

3RH19 21-1LA.. and 3RH19 21-1MA.. auxiliary switch block, 2-pole,
for snapping onto the front¹⁾
cable entry from above or below

2 NO




1 NO + 1 NC



2 NC



Internal wiring



Example: 1 NO + 1 NC,
cable entry from below

3RH19 21- FE22 solid-state compatible auxiliary switch block, 4-pole,
for snapping onto the front¹⁾

2 NO + 2 NC
Ident. no. 22



3RH19 21- EA.. first laterally mountable auxiliary switch blocks (left)

2 NO



1 NO + 1 NC



2 NC



3RH19 21- EA.. first laterally mountable auxiliary switch blocks (right)

2 NO



1 NO + 1 NC



2 NC



3RH19 21- KA.. second laterally mountable auxiliary switch blocks (left)
(only for sizes S3 to S12)

2 NO



1 NO + 1 NC



2 NC



3RH19 21- KA.. second laterally mountable auxiliary switch blocks (right)
(only for sizes S3 to S12)

2 NO



1 NO + 1 NC



2 NC



1) RH29 auxiliaries are intended to be used only with 3RT2 or 3RH2 base devices.

3RH19 auxiliaries are intended to be used only with 3RT1 or 3RH1 base devices.

2) Not for 3RT12, vacuum contactors



Contactors and Contactor Assemblies

3RT Contactors and 3RH2 Control Relays

Accessories for size S00 to S3

Circuit diagrams

Accessories for size S3 contactors and control relays


Solid-state time-delay blocks

(see configuring aid on page 2/38)

3RT19 16-2C...

ON-delay


Size S00



3RT19 16-2D...

OFF-delay (with auxiliary voltage)

Size S00




Sizes S2 to S12

3RT19 16-2E.../2F.../2G... solid-state, time-delay auxiliary switch blocks


1 NO + 1 NC

ON-delay




1 NO + 1 NC

OFF-delay



2 NO

WYE-delta function




(Integrated varistors not shown)

3RT19 26-2C...

ON-delay


Sizes S00 to S3



3RT19 26-2D...

OFF-delay (with auxiliary voltage)

Sizes S0 to S3



A2 can only be connected to N(L-) via the time-delay relay.
X don't connect


① Time-delay block
② Contactor

A2 can be connected to N(L-) via either the contactor or the time-delay relay.
--- optional connection


Designation

Circuit diagram


3RA2811-CW10
ON-delay




3RA2812-DW10
OFF-delay with auxiliary voltage



3RA2813-AW10
ON-delay,
1 CO contact




3RA2813-FW10
ON-delay,
1 NC contact/
1 NO contact

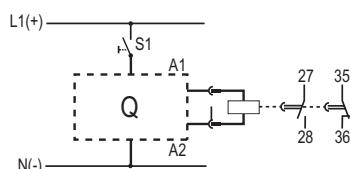


Designation

Circuit diagram


3RA2814-AW10
OFF-delay,
1 CO contact




3RA2814-FW10
OFF-delay with auxiliary voltage,
1 NC contact/
1 CO contact

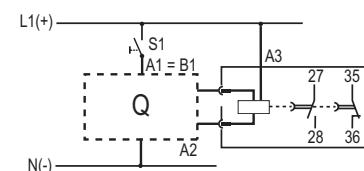

3RA2815-AW10
OFF-delay without auxiliary voltage,
1 CO contact



3RA2815-FW10
OFF-delay without auxiliary voltage,
1 NC contact/
1 NO contact

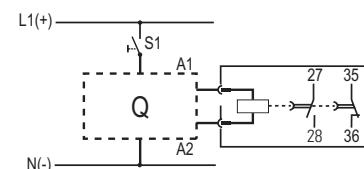


3RT29 accessories are intended to be used only with 3RT2 or 3RH2 base devices.

3RT19 auxiliaries are intended to be used only with 3RT1 or 3RH1 base devices.


Circuit diagrams

Size S00 to S0 Main circuit



The 3RA2913-2AA. (S00) and 3RA2913-2AA (S0) installation kit contains wiring connectors for connecting the main conducting paths, the mechanical interlock and two connecting clips for the contactors.

Sizes S2 to S3 Main circuit




The 3RA19 .3-2A installation kits contain, among other things, the wiring connectors on the top and bottom for connecting the main conducting paths.


Control circuit (sizes S00 and S0)

(terminal designations of contactors according to EN 50 012)

for momentary-contact operation




for maintained-contact operation




Control circuit

(terminal designations of contactors according to EN 50 005)

for momentary-contact operation



for maintained-contact operation



The 3RA19 24-2B mechanical interlock contains one NC contact for the NC contact interlock for each contactor



Position of terminals

Sizes S2 to S3

Terminal designations according to EN 50 005

3RA19 24-2B mechanical interlock (laterally mountable), integrated in reversing contactor assemblies (reversing starters), contains one NC contact for the electrical interlock for each contactor

2 NC

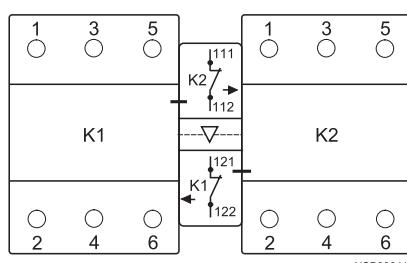

S0 "OFF" button
S1 "Clockwise ON" button
S2 "Counterclockwise ON" button
S "CW-OFF-CCW" button

K1 Clockwise contactor
K2 Counterclockwise contactor


F1 Fuses for main circuit
F3 Fuses for control circuit
F2 Overload relay




3RA Contactor Assemblies

Circuit Diagrams for WYE-delta switching


Circuit diagrams

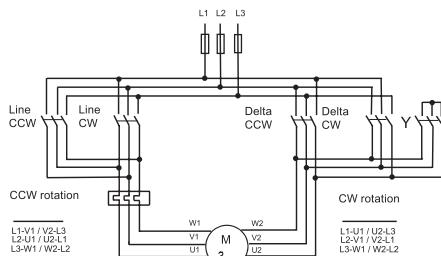Size S00 / S0
Main circuitControl circuits
with 3RA2816-0EW20 function module (set of three)

snapped onto the front

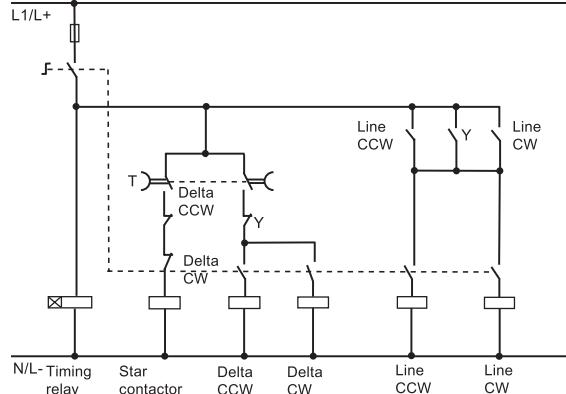Sizes S2 to S3
Main circuit

Sizes S2 and S3

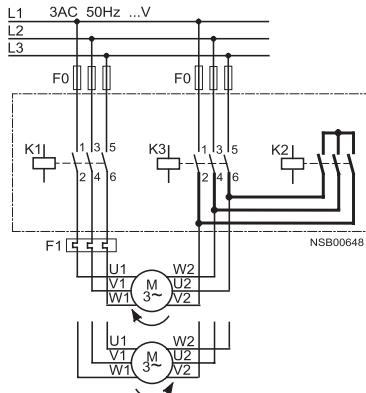


S0 "OFF" button
S1 "ON" button
S Maintained-contact switch


K1 Line contactor
K2 Star contactor
K3 Delta contactor
K4 Solid-state, time-delay auxiliary switch block or time-delay relay

F0 Fuses
F1 Overload relay


3RA2816-0EW20

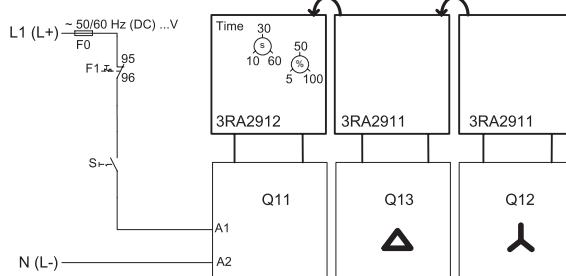Control circuits
with 3RP15 7. time-delay relay,
laterally mounted (typical circuits)

for momentary-contact operation

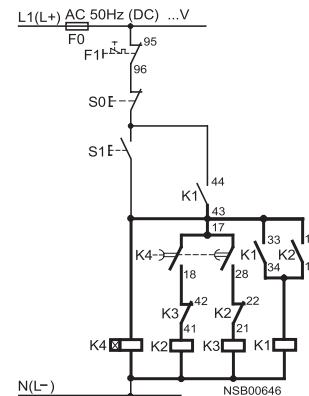

for maintained-contact operation

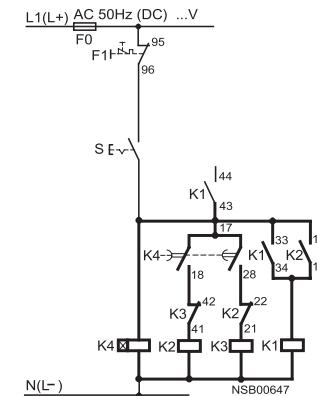

Contact element 17/18 is only closed on the star step; the contact element is open on the delta step and when de-energized.



Contactors and Contactor Assemblies

3T Contactors

3TF68 and 3TF69 vacuum contactors


2

CONTACTORS AND ASSEMBLIES

Internal circuit diagrams


3TF68 44 and 3TF69 44 contactors

4 NO + 4 NC
AC operation
max. complement of auxiliary switches



3TF68 33 and 3TF69 33 contactors

3 NO + 3 NC
DC operation
max. complement of auxiliary switches



Auxiliary switch blocks 3TY7 681-1G

for coil reconnection,
3TF68 and 3TF69,
DC economy circuit



Auxiliary switch blocks 3TY7 561-1AA00

first auxiliary switch block
left or right
mounted on left mounted on right



Auxiliary switch blocks 3TY7 561-1KA00

second auxiliary switch block
left or right
mounted on left mounted on right



Auxiliary switch blocks 3TY7 561-1EA00

with make-before-break contacts
mounted on left mounted on right



Auxiliary switch blocks


3TY7 561-1.

solid-state compatible aux. switch block
mounted on left mounted on right




Interface for control by PLC 3TX7 090-0D

with surge suppression



Circuit diagrams for DC economy circuit · maintained-contact operation

3TF68 33 and 3TF69 33 contactors

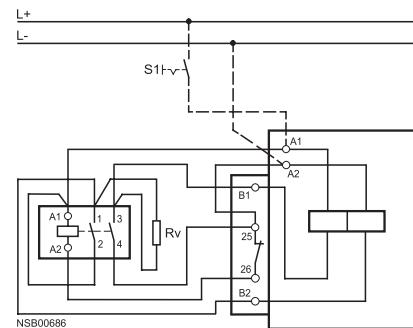

Terminal designations according to EN 50 012.



Contactors and Contactor Assemblies

Coupling Relays

3RH21 coupling for switching auxiliary circuits

Terminal diagrams

DC operation

L+ is to be connected to coil terminal A1.

3RH21 coupling relays for auxiliary circuits, size S00


Terminal designations according to EN 50 011

(it is not possible to snap on an auxiliary switch block)

Surge suppressor can be mounted


4 NO

Ident no.: 40E




3 NO + 1 NC

31E



2 NO + 2 NC


22E



Suppressor Diode integrate


4 NO

Ident no.: 40E




3 NO + 1 NC

31E



2 NO + 2 NC


22E



Diode integrated


4 NO

Ident no.: 40E



3 NO + 1 NC

31E



2 NO + 2 NC

22E




Position of terminals

Size S00

3RH21 coupling relays


4 NO

Ident no.: 40E




3 NO + 1 NC

31E



2 NO + 2 NC

22E




3RH19 21-.. DA11 first laterally mountable auxiliary switch block¹⁾

mountable on left or right

1 NO + 1 NC

left right





Contactors and Contactor Assemblies

3RH2 Control & Latching Relays

3RH2 Terminal Designations

2

CONTACTORS AND
ASSEMBLIES

Terminal designations according to EN 50 011

3RH21 control relays

4 NO

Ident no.:40E

13	23	33	43	A1	○
○	○	○	○	○	○
○	○	○	○	○	○
14	24	34	44	A2	○
○	○	○	○	○	○

NSB00124

3 NO + 1 NC

31E

13	21	33	43	A1	○
○	○	○	○	○	○
○	○	○	○	○	○
14	22	34	44	A2	○
○	○	○	○	○	○

NSB00125

2 NO + 2 NC

22E

13	21	31	43	A1	○
○	○	○	○	○	○
○	○	○	○	○	○
14	22	32	44	A2	○
○	○	○	○	○	○

NSB00126

3RH21 40 control relays

with 3RH19 11-1GA.. auxiliary switch blocks snapped onto the front

8 NO

Ident no.:80E

13	23	33	43	A1	○
○	○	○	○	○	○
○	○	○	○	○	○
53	63	73	83		
○	○	○	○		
○	○	○	○		
54	64	74	84		
○	○	○	○		
14	24	34	44	A2	○
○	○	○	○	○	○

NSB00127

7 NO + 1 NC

71E

13	23	33	43	A1	○
○	○	○	○	○	○
○	○	○	○	○	○
53	61	73	83		
○	○	○	○		
○	○	○	○		
54	62	74	84		
○	○	○	○		
14	24	34	44	A2	○
○	○	○	○	○	○

6 NO + 2 NC

62E

13	23	33	43	A1	○
○	○	○	○	○	○
○	○	○	○	○	○
53	61	71	83		
○	○	○	○		
○	○	○	○		
54	62	72	84		
○	○	○	○		
14	24	34	44	A2	○
○	○	○	○	○	○

NSB00129

5 NO + 3 NC

53E

13	23	33	43	A1	○
○	○	○	○	○	○
○	○	○	○	○	○
53	61	71	81		
○	○	○	○		
○	○	○	○		
54	62	72	82		
○	○	○	○		
14	24	34	44	A2	○
○	○	○	○	○	○

NSB00130

4 NO + 4 NC

Ident no.:44E

13	23	33	43	A1	○
○	○	○	○	○	○
○	○	○	○	○	○
51	61	71	81		
○	○	○	○		
○	○	○	○		
52	62	72	82		
○	○	○	○		
14	24	34	44	A2	○
○	○	○	○	○	○

NSB00131

3RH24 latched control relays

4 NO

Ident no.: 40E

13	23	33	43	A1+	
○	○	○	○	○	
○	○	○	○	○	
14	24	34	44	A2-	
○	○	○	○		
				E1+	○
				E2-	○

NSB00132

3 NO + 1 NC

31E

13	21	33	43	A1+	
○	○	○	○	○	
○	○	○	○	○	
14	22	34	44	A2-	
○	○	○	○		
				E1+	○
				E2-	○

NSB00133

2 NO + 2 NC

Ident no.: 22E

13	21	31	43	A1+	
○	○	○	○	○	
○	○	○	○	○	
14	22	32	44	A2-	
○	○	○	○		
				E1+	○
				E2	○

NSB00134



3RT Contactors and 3RH Control Relays

3RT2 contactors and accessories

Position of terminals (applicable to screw connection and Cage Clamp connection)


Size S00

Terminal designations according to EN 50 012

3RT20 1 contactors, 3RT20 1 coupling relays,


1 NO

Ident. no. 10E



1 NC

01




3RT20 1 contactors (with 1 NO)

with auxiliary switch blocks snapped onto the front
3RH19 21-..H...


1 NO + 1 NC

Ident. no.: 11




2 NO + 3 NC

Ident. no.: 23




Size S0

Terminal designations according to EN 50 012

3RT20 2 Contactors with 1NO + 1NC
3RT20 2 Coupling Relays


2 NO + 2 NC

22




3 NO + 2 NC

32




Sizes S3 to S12

Terminal designations according to EN 50 012

3RT 20 3,
3RT20 4, 3RT124 46 contactors,3RT 20 3, 3RT 20 4
contactors3RH19 21-..HA22
4-pole auxiliary switch block
snapped onto the front


2 NO + 2 NC

Ident. no. 22 E

3RT20 3, 3RT20 4
contactorswith 4-pole auxiliary switch block
for snapping onto the front
3RH19 21-..HA31



3 NO + 1 NC

Ident. no. 31 E



Size S2

Terminal designations according to EN 50 012

3RT20 3 Contactors with 1NO + 1NC
3RT20 3 Coupling Relays3RT20 3 Contactors
with 3NO + 3NC



3RT Contactors

3RT1/2 contactors and accessories

2


CONTACTORS AND ASSEMBLIES

Position of terminals (applicable to screw connection and Spring-type connection)


Accessories for size S3 to S12 contactors
Terminal designations acc. to EN 50 005

3RH19 21- . F... auxiliary switch blocks, 4-pole,
 for snapping onto the front


4 NO
 Ident. no. 40




3 NO + 1 NC
 31




2 NO + 2 NC
 22



4 NC
 04




2 NO + 2 NC
 22 U




make-before-break

3RH19 21-1LA.. auxiliary switch blocks, 2-pole,
 for snapping onto the front, cable entry from above


2 NO



1 NO + 1 NC




2 NC




3RH19 21-1MA.. auxiliary switch blocks, 2-pole,
 for snapping onto the front, cable entry from below


2 NO



1 NO + 1 NC




2 NC



3RH19 21- . FE22 solid-state compatible auxiliary switch block, 4-pole,
 for snapping onto the front


2 NO + 2 NC
 Ident. no. 22




Terminal designations according to EN 50 005 or EN 50 012

3RH19 21- . CA.. auxiliary switch blocks, single-pole,
 for snapping onto the front


1 NO



1 NC




1 NO



with extended
contact-making

1 NC



with extended
contact-making



3RT Contactors


3RT1/2

Position of terminals

*Accessories for size S2 to S12 contactors
Terminal designations acc. to EN 50 005*


3RH19 21- . EA.. first laterally mountable auxiliary switch blocks (left)

2 NO




NSB00615

1 NO + 1 NC



NSB00616


2 NC



NSB00617


3RH19 21- . EA.. first laterally mountable auxiliary switch blocks (right)

2 NO




NSB00618

1 NO + 1 NC



NSB00619

2 NC




NSB00620

3RH19 21- . KA.. second laterally mountable auxiliary switch blocks (left)


(only for sizes S3 to S12; can only be used if no auxiliary switches are snapped onto the front)

2 NO




NSB00621

1 NO + 1 NC



NSB00622

2 NC




NSB00623

3RH19 21- . KA.. second laterally mountable auxiliary switch blocks (right)


(only for sizes S3 to S12; can only be used if no auxiliary switches are snapped onto the front)

2 NO




NSB00624

1 NO + 1 NC



NSB00625

2 NC




NSB00626

Accessories for size S3 to S12 contactors

Terminal designations acc. to DIN 46 199 Part 5


3RT19 26-2E.../2F.../2G... solid-state, time-delay auxiliary switch blocks

1 NO + 1 NC
ON-delay




NSB00627

1 NO + 1 NC
OFF-delay



NSB00627

2 NO
Star-delta function




NSB00628

3RT26 capacitor contactors

Size S00

with 4-pole auxiliary switch block mounted on the front




NSB00633

The auxiliary switch block comprises 3 leading contacts (not shown) and one unassigned NO contact.

Sizes S2 and S3

with 4-pole auxiliary switch block mounted on the front



NSB00630

The auxiliary switch block comprises 3 leading contacts (not shown) and one unassigned NO contact.



3RT1 Contactors

3RT1 contactors and accessories

2

CONTACTORS AND ASSEMBLIES

Position of terminals (applicable to screw connection and Spring-type terminal connection)


Sizes S6 to S12

3RT1.5, 3RT1.6, 3RT1.7 contactors

- with conventional op. mechanism (3RT1...-A...)

with laterally mountable auxiliary switch blocks 3RH19 21-1DA11 (for 2 NO + 2 NC, incl. in contactor)
3RH19 21-1JA11
(expandable to 4 NO + 4 NC)


2 NO + 2 NC or 4 NO + 4 NC



- with solid-state op. mechanism (3RT1...-N...)

with laterally mountable auxiliary switch blocks 3RH19 21-1DA11 (for 2 NO + 2 NC, incl. in contactor)
3RH19 21-1JA11
(expandable to 4 NO + 4 NC)


2 NO + 2 NC or 4 NO + 4 NC



- with solid-state op. mechanism (3RT1...-P...)

with laterally mountable auxiliary switch blocks 3RH19 21-1DA11 (for 1 NO + 1 NC, incl. in contactor)
3RH19 21-1JA11
(expandable to 2 NO + 2 NC)

1 NO + 1 NC or 2 NO + 2 NC




Contactors with 4 main contacts, size S00


Terminal designations acc. to EN 50 005

3RT23 and 3RT25 contactors

4 NO



2 NO + 2 NC




Contactors with 4 main contacts, sizes S2 to S3

Terminal designations acc. to EN 50 005


3RT13 and 3RT15 contactors

4 NO



Size S0 with integrated 1NO + 1NC aux (13/14 + 21/22) and only one set of A1+A2 on front

2 NO + 2 NC





Contactors and Contactor Assemblies


3T Contactors

3TF68 and 3TF69 vacuum contactors, 3-pole

Position of terminals


AC operation

3TF68 and 3TF69 contactors
4 NO + 4 NC



DC operation

3TF68 and 3TF69 contactors
3 NO + 3 NC
max. complement of auxiliary switches



Solid-state compatible auxiliary switch blocks

3TY7 561-1. for lateral mounting onto
size 6 to 14 contactors




3RT20 contactors, 3-pole

Dimension drawings

3RT2.1.-1 contactor and 3RH21..-1 contactor relays

Size S00 and NEMA Size 0, screw connection
with surge suppressor and auxiliary switch block

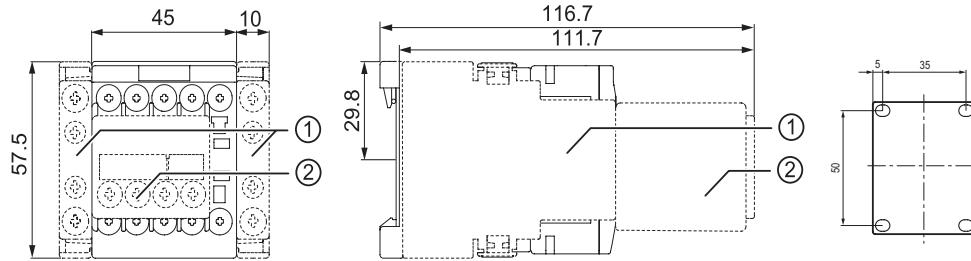


Lateral clearance from earthed parts = 6 mm

1)Laterally mountable auxiliary switch block 3RH2911-1DA.. / -1DE.. / -1EE..

2)Auxiliary switch block for mounting on the front 3RH2911-1FA.. / -1GA.. / -1HA.. / -1NF..


3RT2.1.-2 contactor and 3RH21..-2 contactor relay

Size S00, Spring-type terminal connection
with auxiliary switch block

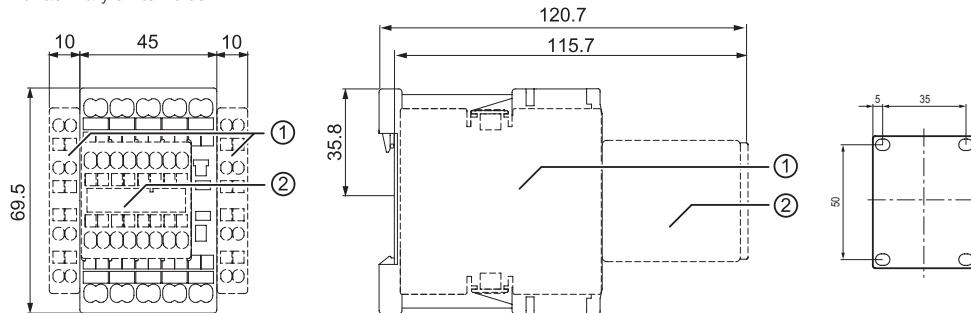

1)Laterally mountable auxiliary switch block 3RH2911-2DA.. / -2DE.. / -2EE..

2)Auxiliary switch block for mounting on the front 3RH2911-2FA.. / -2GA.. / -2HA.. / -2NF..

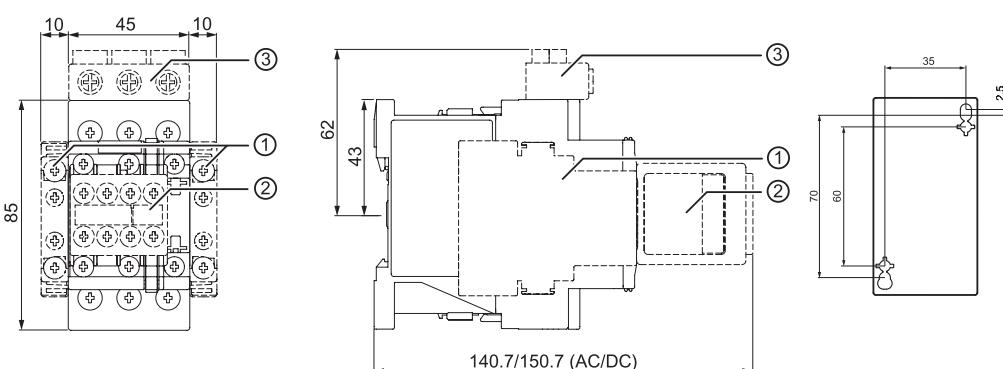3RT2.2.-1 contactors Size S0 and NEMA Size 1,
(screw-type connection system) with auxiliary switch blocks
mounted and other accessories

1)Laterally mountable auxiliary switch block 3RH2921-1DA.. / -1DE..

2)Auxiliary switch block for mounting on the front 3RH2911-1FA.. / -1GA.. / -1HA.. / -1NF..

3)3-phase infed terminal 3RV2925-5AB


For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax

3RT20 contactors, 3-pole

Dimension drawings

3RT2.2.-2 and 3RT20.----0LA2 contactors

Size S0 (spring-loaded connection) with auxiliary switch blocks mounted

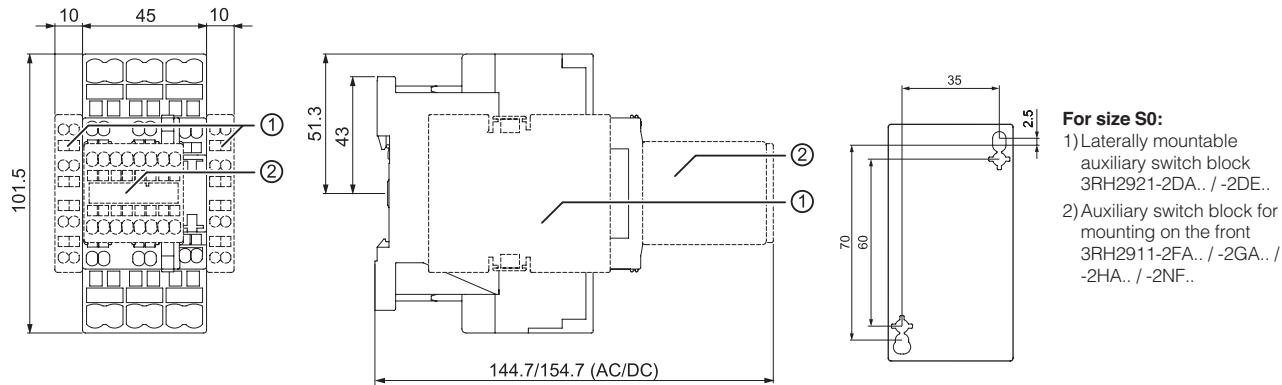


For size S0:

- 1) Laterally mountable auxiliary switch block 3RH2921-2DA.. / -2DE..
- 2) Auxiliary switch block for mounting on the front 3RH2911-2FA.. / -2GA.. / -2HA.. / -2NF..

3RT20 3 contactors

Size S2 and NEMA Size 2, screw connection

with surge suppressor, auxiliary switch blocks and mounted overload relay

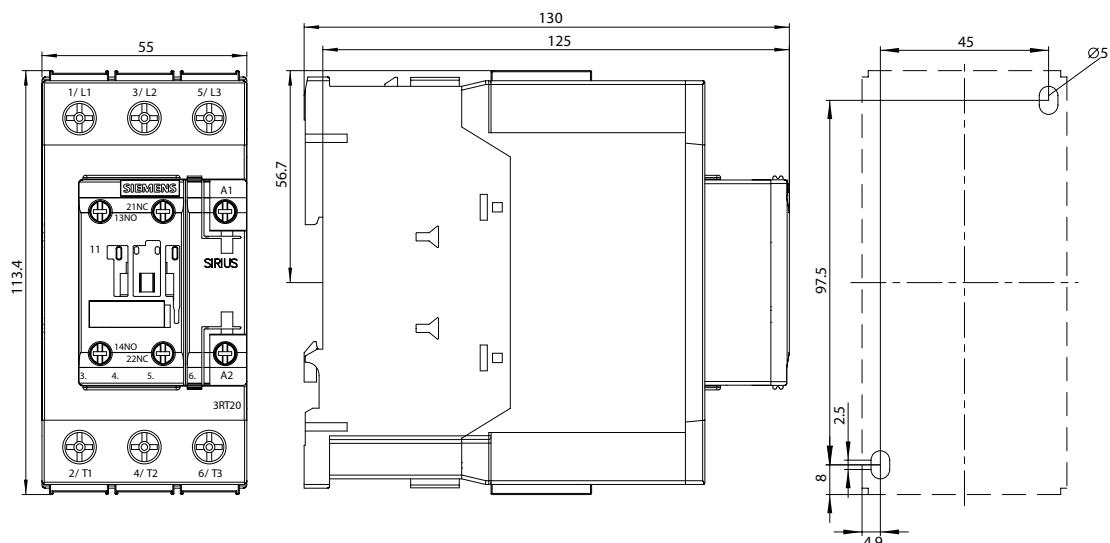

For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax

For size S2:

a = 0 mm with varistor < 240 V, diode assembly
 a = 3.5 mm with varistor > 240 V
 a = 17 mm with RC element
 b = DC 15 mm deeper than AC


- 1) Auxiliary switch block, laterally mountable
- 2) Auxiliary switch block, mountable on the front (1, 2 and 4-pole)
- 3) Surge suppressor
- 4) Drilling pattern

3RT20 and 3RT24 contactors, 3-pole

Dimension drawings

3RT20 3 contactors

Size S2, Spring-type terminal connection
with surge suppressor, auxiliary switch blocks and mounted overload relay

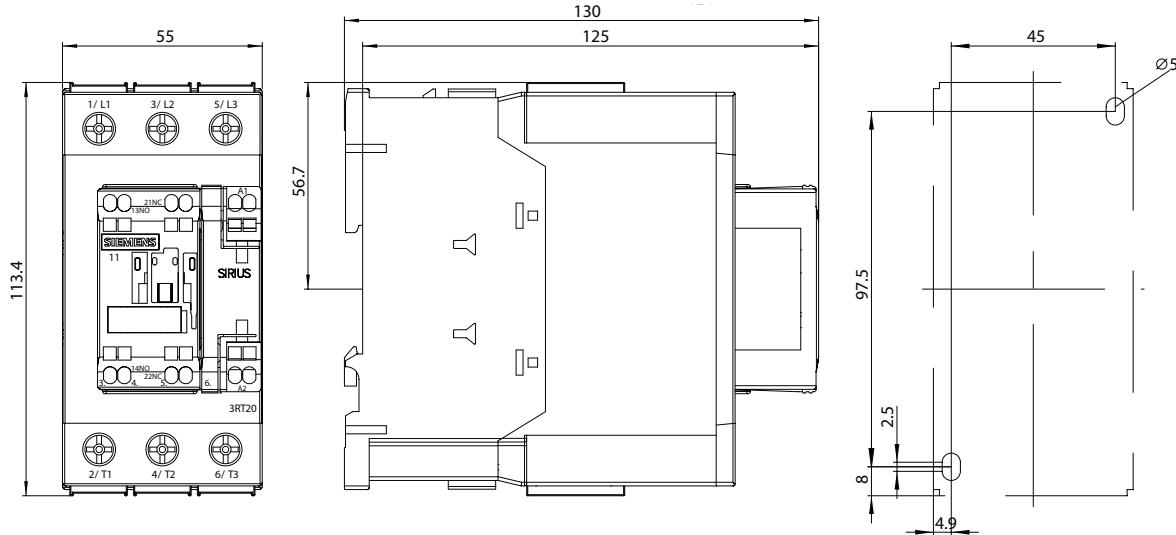


For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax

3RT20 4, 3RT24 46 contactors

Size S3 and NEMA Size 3, screw connection
with surge suppressor, auxiliary switch blocks
and mounted overload relay

Lateral clearance from earthed parts = 6 mm

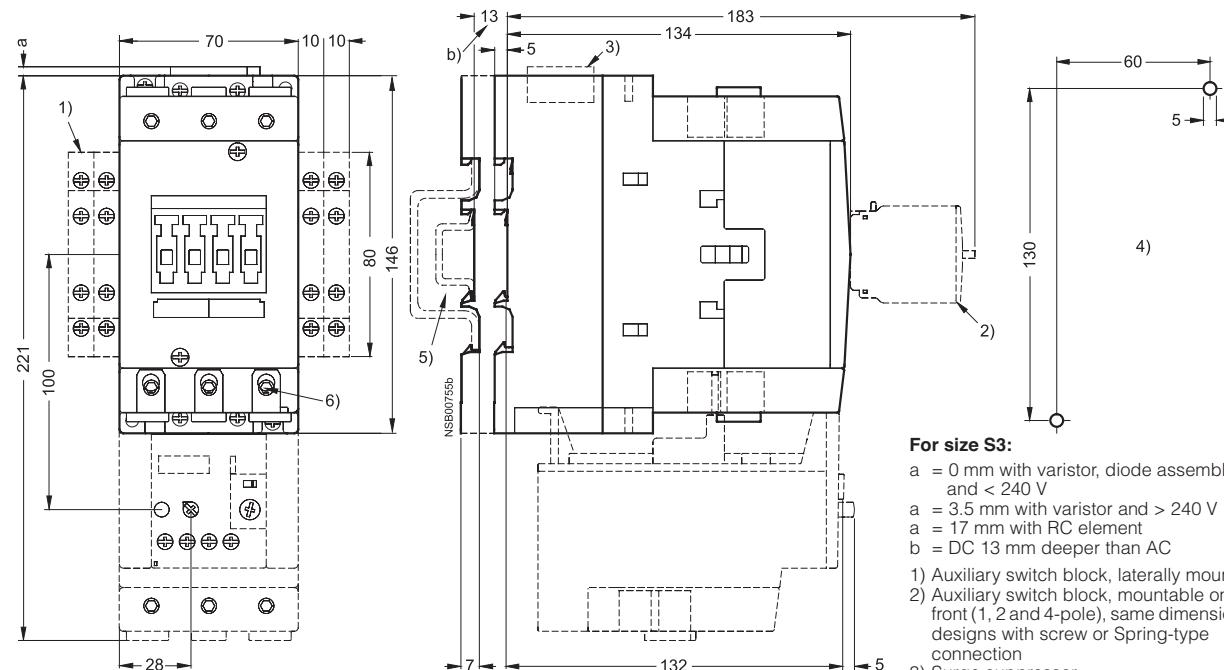

For size S3:

a = 0 mm with varistor, diode assembly and < 240 V
 a = 3.5 mm with varistor and > 240 V
 a = 17 mm with RC element
 b = DC 13 mm deeper than AC

- 1) Auxiliary switch block, laterally mountable
- 2) Auxiliary switch block, mountable on the front (1, 2 and 4-pole)
- 3) Surge suppressor
- 4) Drilling pattern
- 5) For mounting on 35 mm standard mounting rail (15 mm deep) acc. to EN 50 022 or 75 mm standard mounting rail acc. to EN 50 023
- 6) Hexagon socket screw 4 mm


For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax

3RT20 contactors, 3-pole

Dimension drawings

3RT20 4 contactors,

Size S3, Spring-type terminal connection
with surge suppressor, auxiliary switch blocks
and mounted overload relay

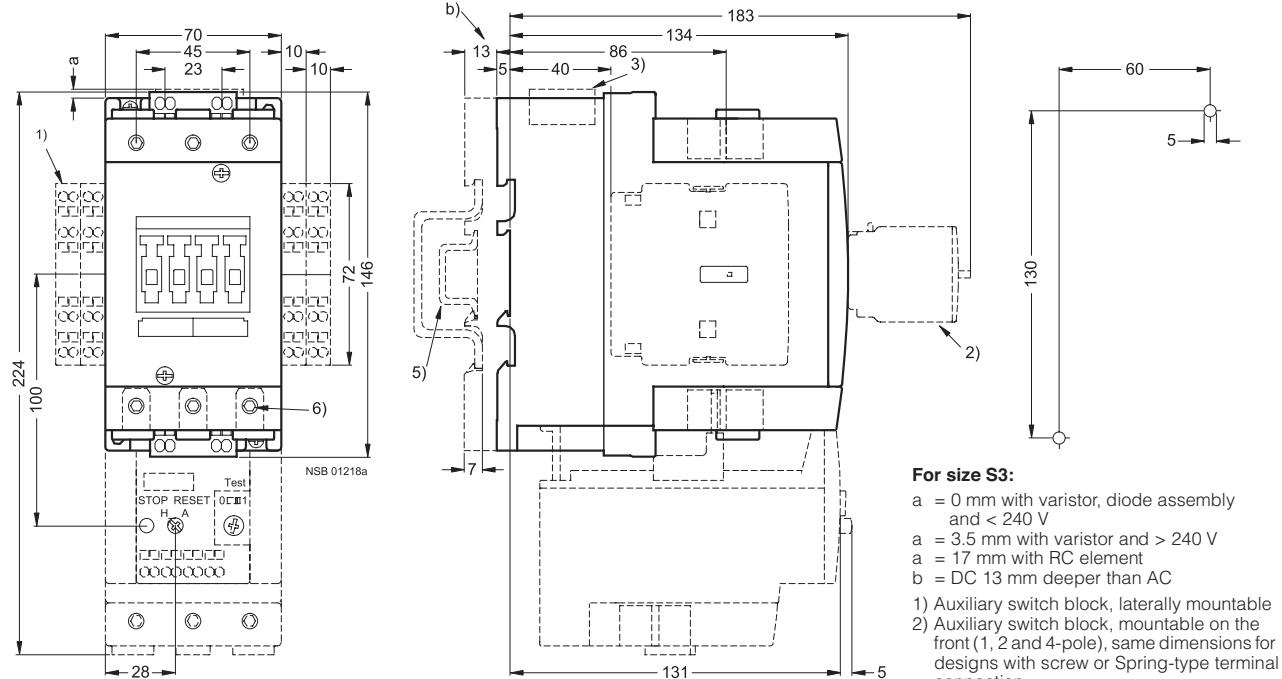

For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax

3RT10 and 3RT14 contactors, 3-pole

2


CONTACTORS AND ASSEMBLIES

Dimension drawings


3RT10 5, 3RT14 5 contactors

Size S6 and NEMA Size 4

with auxiliary switch block, laterally mountable and mountable on the front, mounted overload relay and box terminals, laterally mounted electronics module with remaining lifetime indication

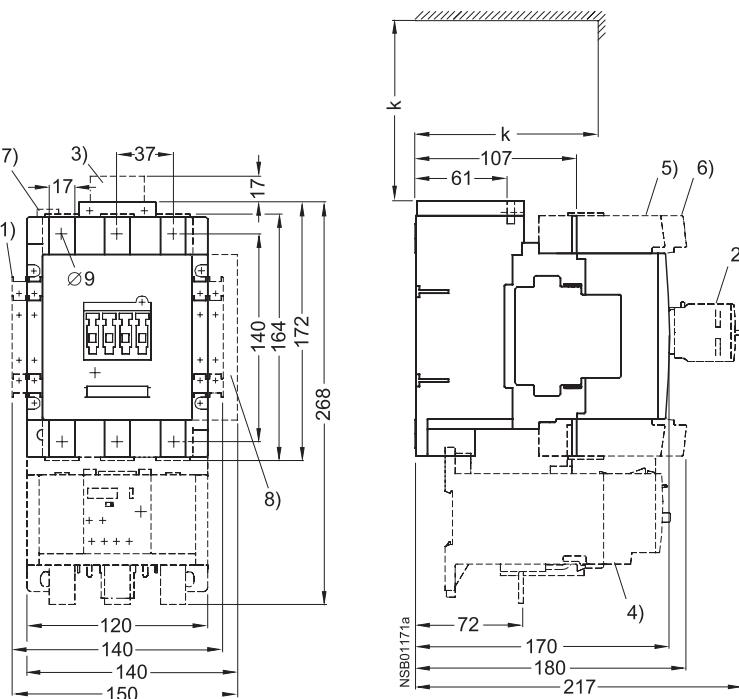

Clearance from earthed parts with directly mounted overload relay:
lateral: 10 mm
front: 20 mm



For size S6:

k = 120 mm (minimum clearance for removing the withdrawable coil)

- 1) Second auxiliary switch block, laterally mountable
- 2) Auxiliary switch block, mountable on the front
- 3) RC element
- 4) 3RB10 overload relay, mounted
- 5) 3RT19 55-4G box terminal block (hexagon socket 4 mm)
- 6) 3RT19 56-4G box terminal block (hexagon socket 4 mm)
- 7) PLC connection DC 24 V and changeover switch (with 3RT1...-N)
- 8) Electronics module with remaining lifetime indication (auxiliary switch block not mountable on right-hand side)

For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax



3RT10 and 3RT14 contactors, 3-pole

Dimension drawings

3RT10 6, 3RT14 6 contactors

Size S10

with auxiliary switch block, laterally mountable and mountable on the front, mounted overload relay and box terminals, laterally mounted electronics module with remaining lifetime indication


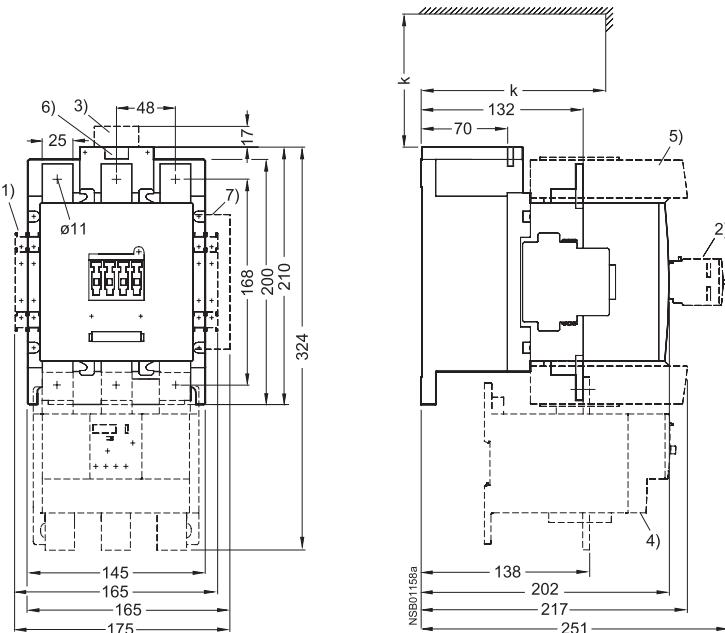


Drilling pattern

3RT10 7, 3RT14 7 contactors

Size S12

with auxiliary switch block, laterally mountable and mountable on the front, mounted overload relay and box terminals, laterally mounted electronics module with remaining lifetime indication

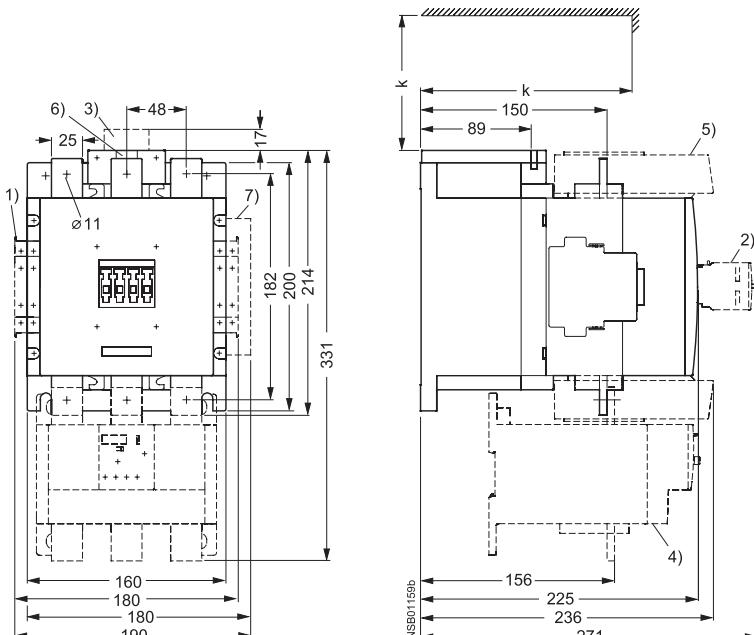

Drilling pattern

For sizes S10 and S12:




Clearance from earthed parts with directly mounted overload relay:
lateral: 10 mm
front: 20 mm

For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax




3RT10 contactors, 3-pole with integrated safety

Dimension drawings




3RT10 contactors with integrated safety
Size S6

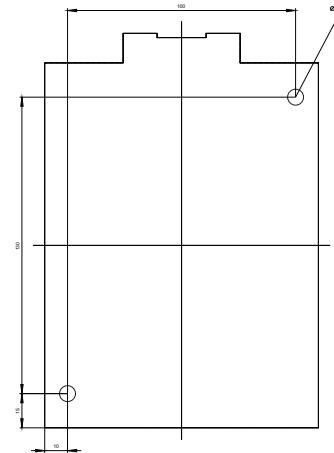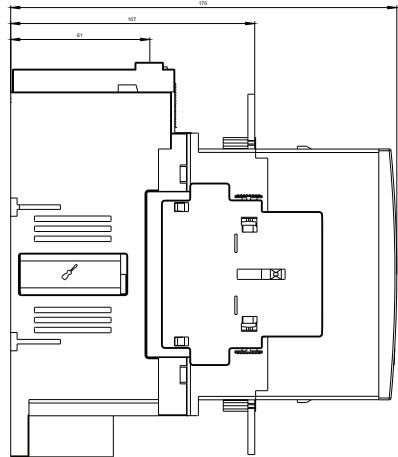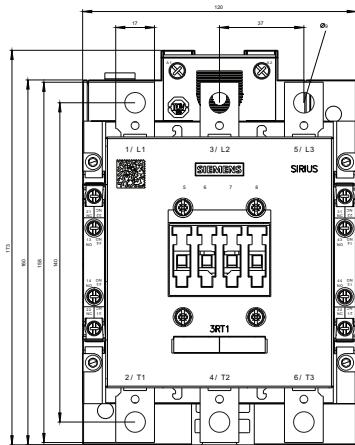

Size S10

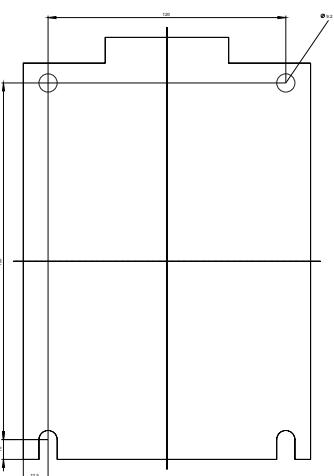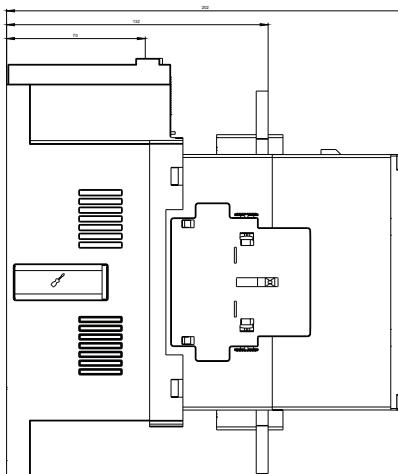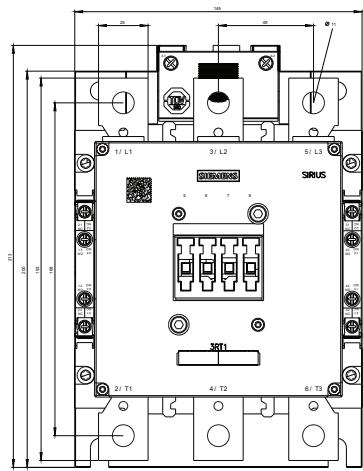

Size S12

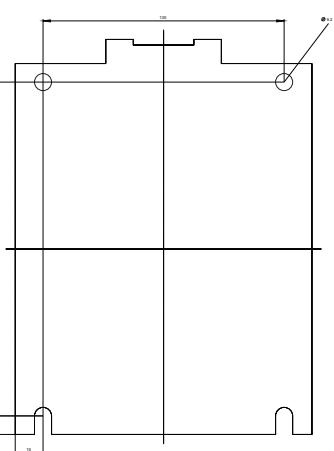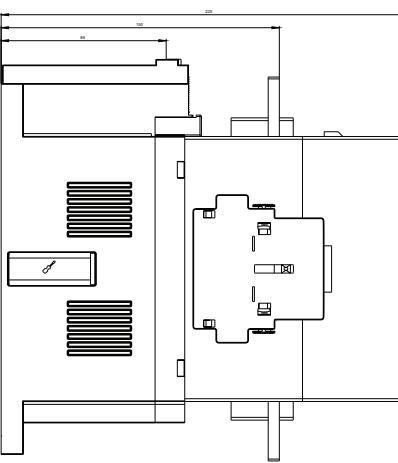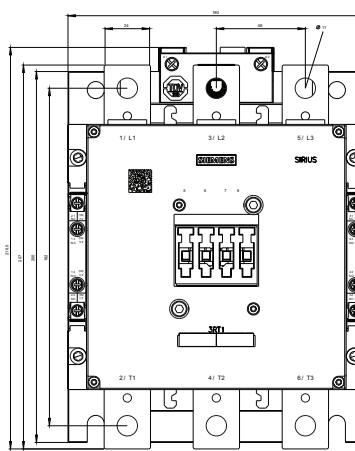



3RT12 vacuum contactors, 3-pole

Dimension drawings

3RT12 6 vacuum contactors

Size S10

with auxiliary switch block, laterally mountable,
mounted overload relay and box terminals,
laterally mounted electronics module with remaining lifetime indication

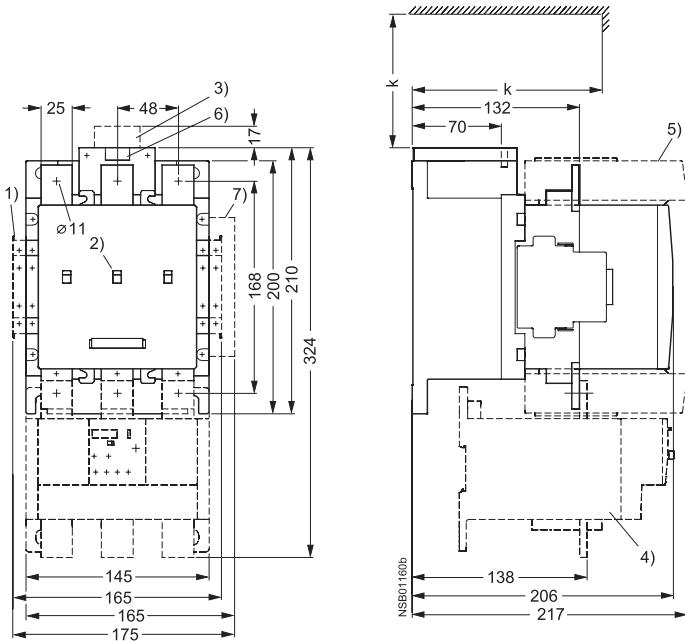

Detail



Contact erosion indicator for vacuum interrupters



3RT12 7 vacuum contactors

Size S12

with auxiliary switch block, laterally mountable,
mounted overload relay and box terminals,
laterally mounted electronics module with remaining lifetime indication

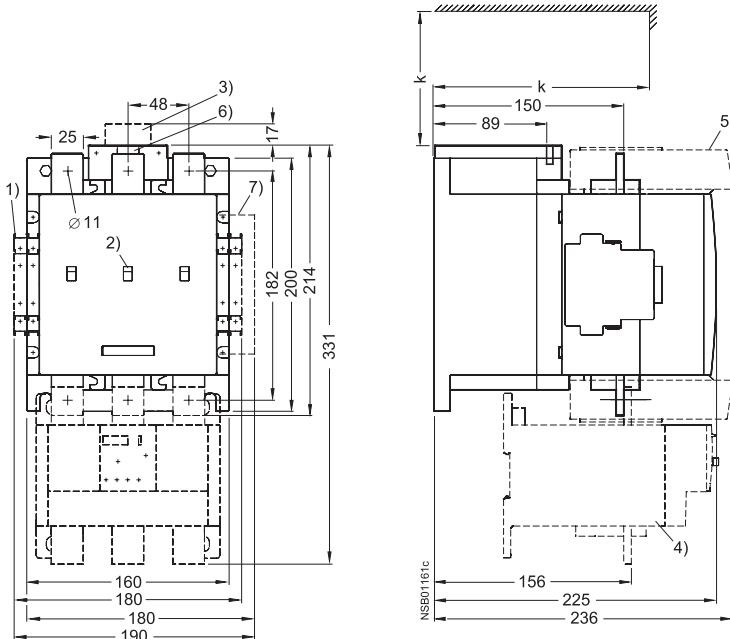

For sizes S10 and S12:

k = 150 mm (minimum clearance for removing the withdrawable coil)

- 1) Second auxiliary switch block, laterally mountable
- 2) Position and contact erosion indicator
- 3) RC element
- 4) 3RB10 overload relay, mounted
- 5) Box terminal block (hexagon socket 6 mm)
- 6) PLC connection DC 24 V and changeover switch (with 3RT1...-N)
- 7) Electronics module with remaining lifetime indication (auxiliary switch block not mountable on right-hand side)


For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax

3RT23 and 3RT25 contactors, 4-pole

Dimension drawings

3RT23 1 and 3RT25 1 contactors

Size S00, screw connection
with surge suppressor and auxiliary switch block

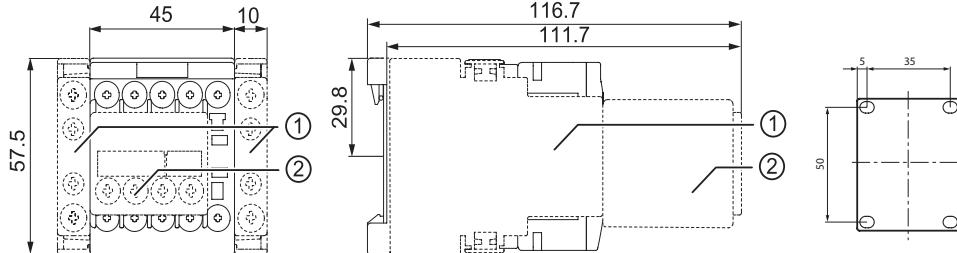


Lateral clearance from earthed parts = 6 mm

For size S00:

- 1) Laterally mountable auxiliary switch block 3RH2911-1DA.. / -1DE.. / -1EE..
- 2) Auxiliary switch block for mounting on the front 3RH2911-1FA.. / -1GA.. / -1HA.. / -1NF..

3RT23 2 and 3RT25 2 contactors

Size S0 with coil terminal module and auxiliary switch block

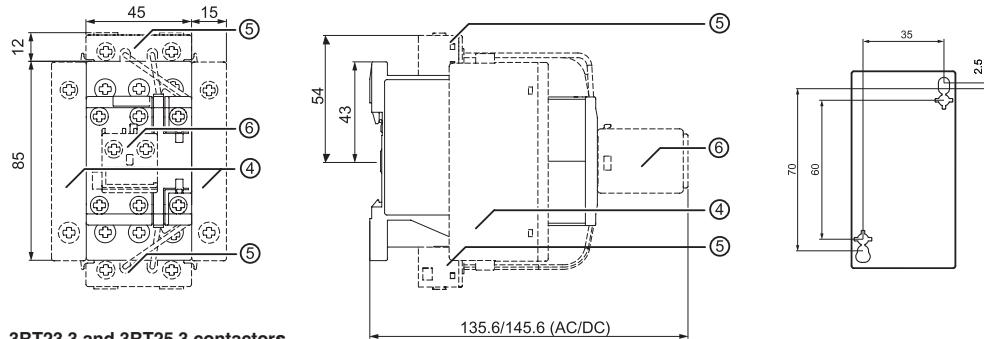


For size S0:

- 4) 4-pole contactor for switching 4 resistive loads 3RT232; 4-pole pole-changing contactor for changing the polarity of hoisting gear motors (2 NO contacts and 2 NC contacts) 3RT252.
- 5) Coil terminal module 3RT2926-4RA11/-4RB11
- 6) Auxiliary switch block for mounting on the front 3RH2911-1AA.. / -1BA

3RT23 3 and 3RT25 3 contactors

Size S2 with surge suppressor and auxiliary switch block

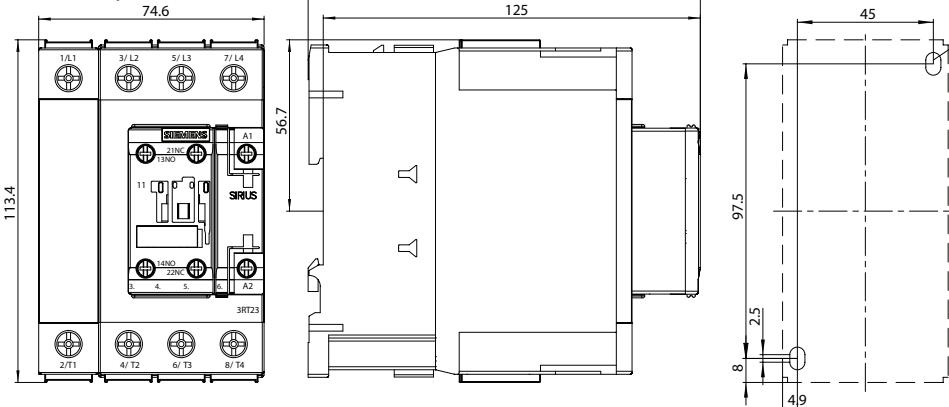


For sizes S2 and S3:

$a = 0$ mm with varistor < 240 V
 $a = 3.5$ mm with varistor > 240 V
 $a = 17$ mm with RC element and diode assembly
 $b = S2$: DC 15 mm deeper than AC
 $S3$: DC 13 mm deeper than AC

- 1) Auxiliary switch block, laterally mountable (right or left)
- 2) Auxiliary switch block, mountable on the front, (1, 2 and 4-pole, also 3RH19 21-1FE22 solid-state compatible design)
- 3) Surge suppressor
- 4) Drilling pattern
- 5) For mounting on 35 mm standard mounting rail (15 mm deep) acc. to EN 50 022 or, in the case of size S3, 75mm standard mounting rail acc. to EN 50 023
- 6) Hexagon socket screw 4 mm

3RT23 4 contactors

Size S3 with surge suppressor and auxiliary switch block



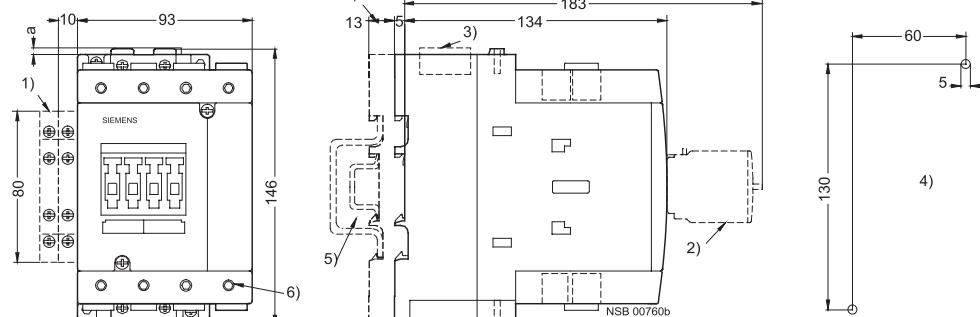


For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax



3RT16 capacitor contactors

Dimension drawings

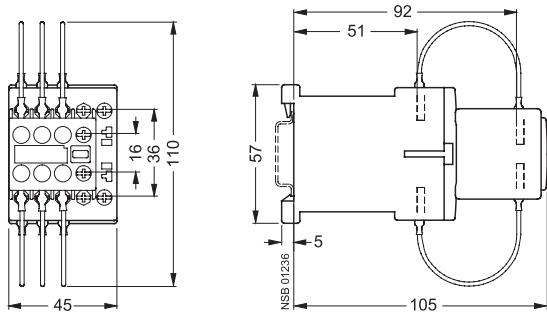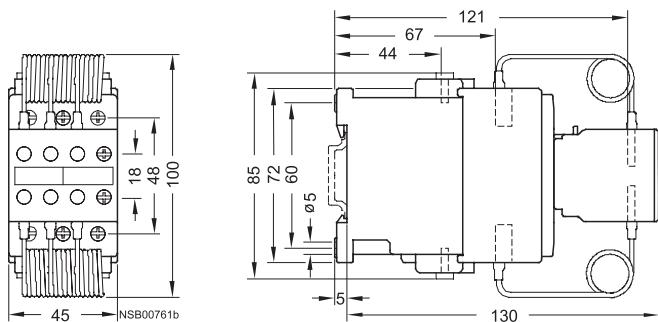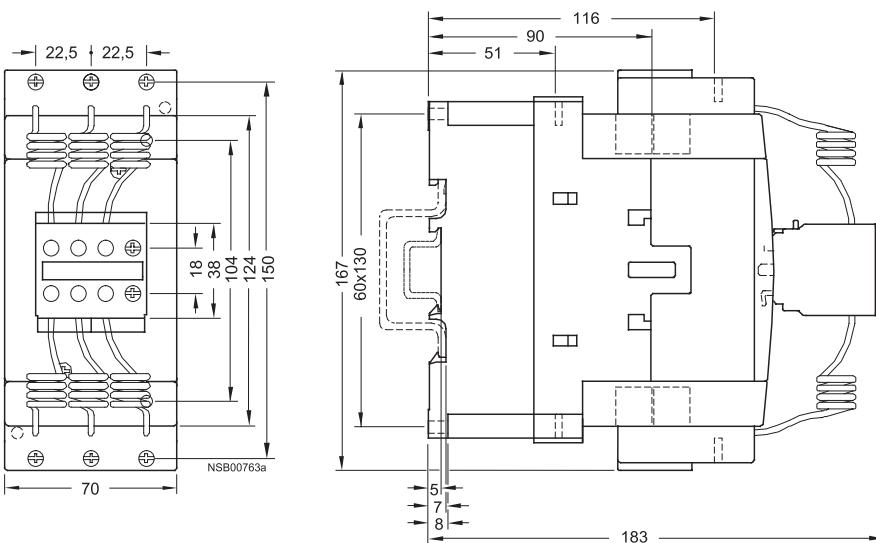
3RT16 17 capacitor contactors
Size S003RT16 27 capacitor contactors
Size S03RT16 47 capacitor contactors
Size S3

For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax


3RA23 contactor assemblies for reversing

Dimension drawings


Size S00 / 3RA231

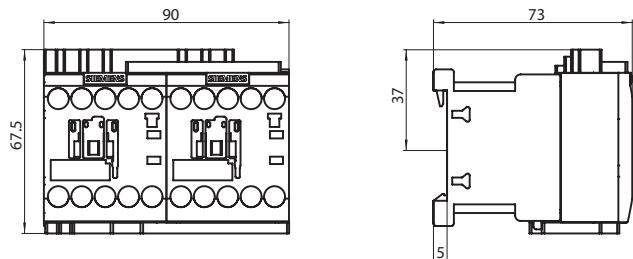


Size S0 / 3RA232

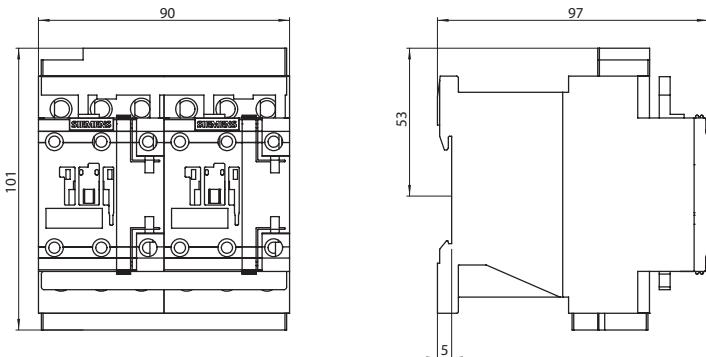

Size S2 / 3RA233

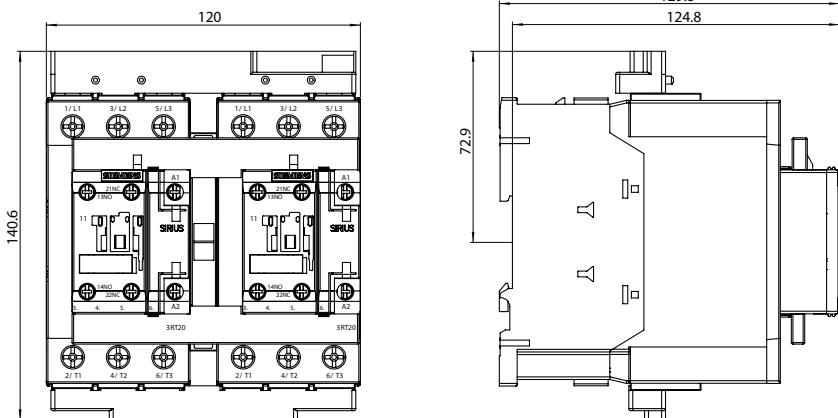

Size S3 / 3RA234

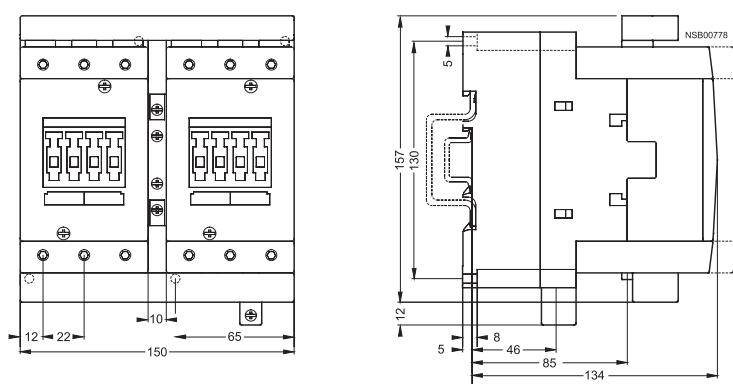


For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax




3RA13 contactor assemblies for reversing

Dimension drawings

Size S6

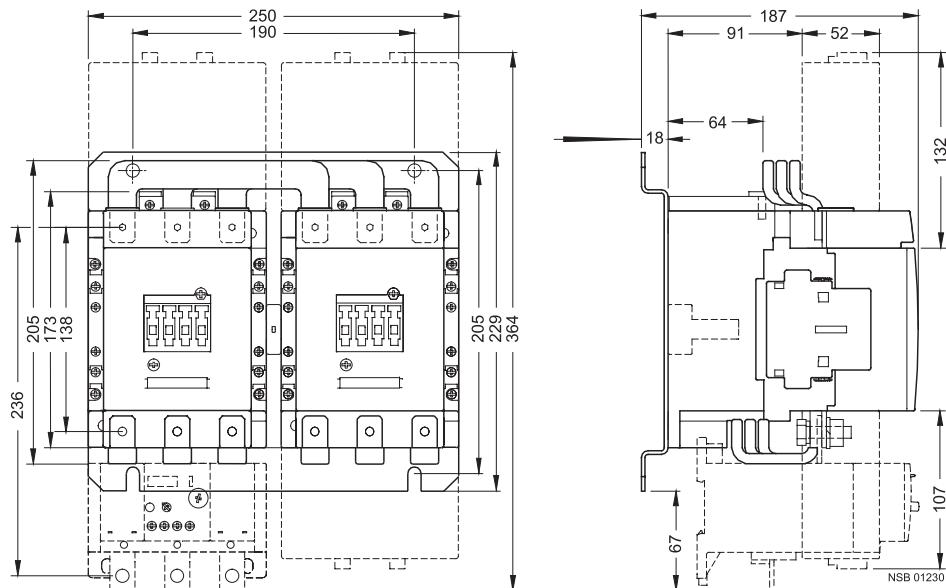

Size S10

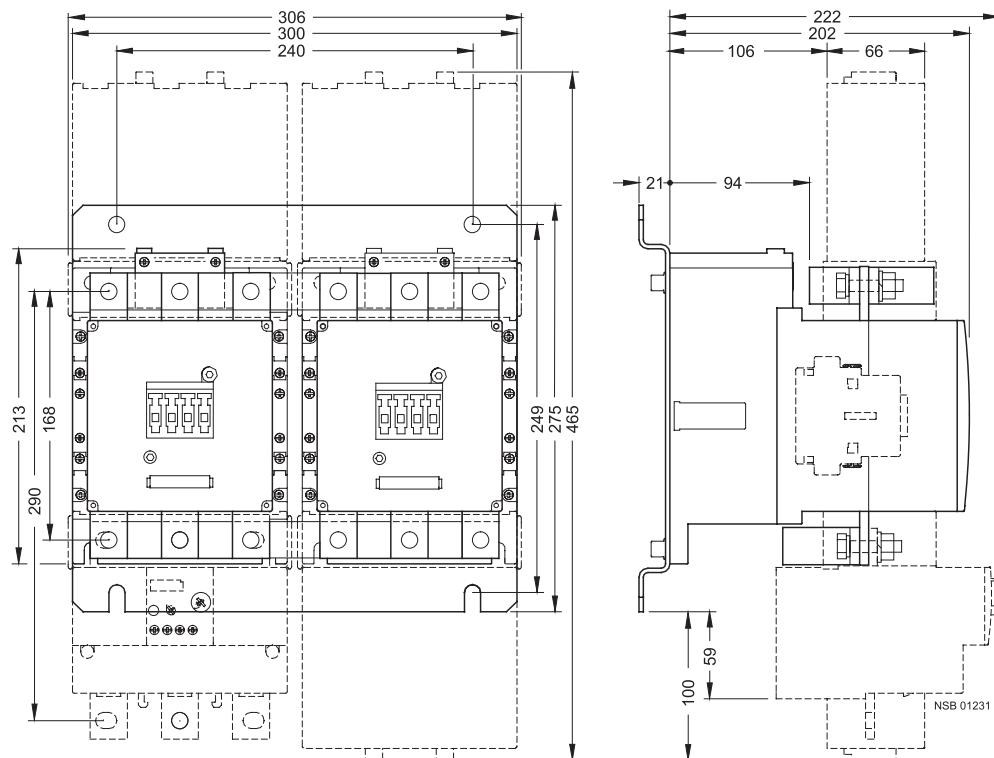



The assemblies shown on this page are for customer assembly with individual components.



3RA13 contactor assemblies for reversing

Dimension drawings

Size S12

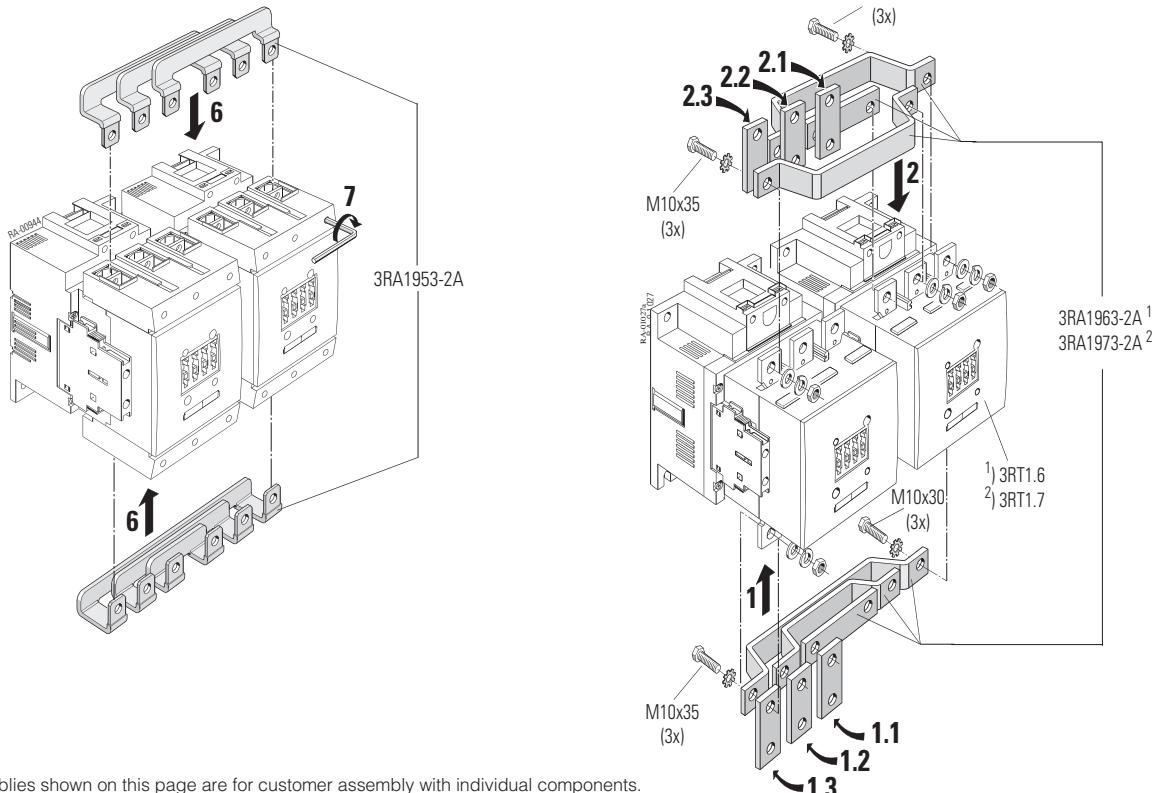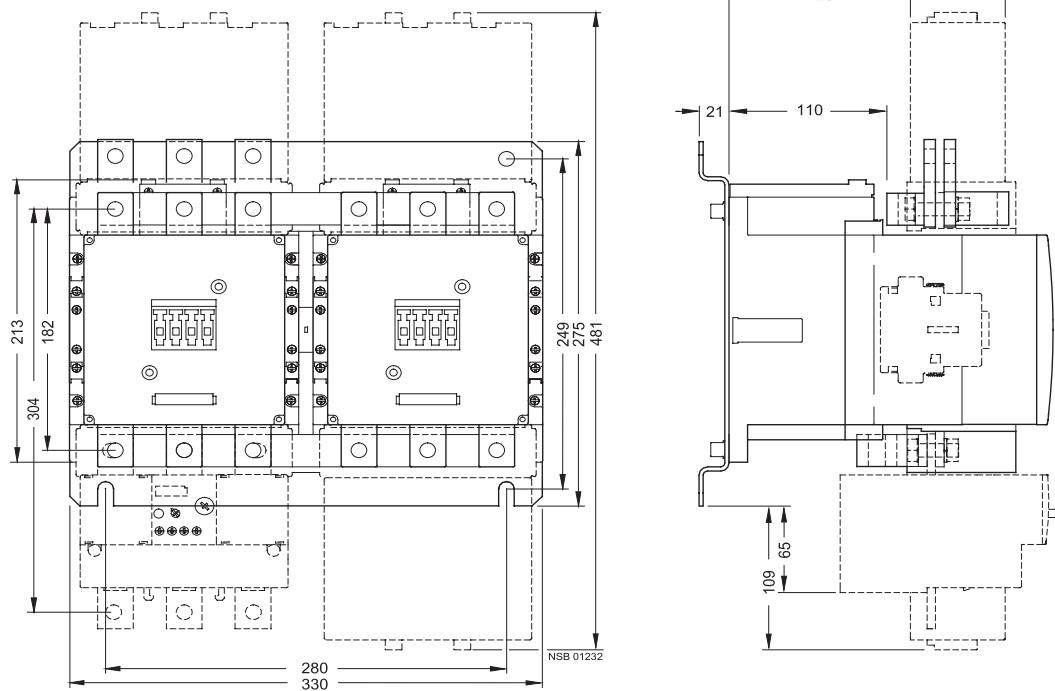


The assemblies shown on this page are for customer assembly with individual components.

3TF68 and 3TF69 vacuum contactors, 3TC4 and 3TC5 DC contactors


Dimension drawings

3TF68 vacuum contactors

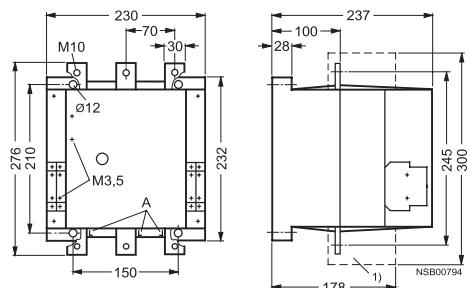

Detail


A = Contact erosion indicator for vacuum interrupter contacts



3TC4 and 3TC5 contactors

3TC44 contactors


Size 2, AC and DC operation

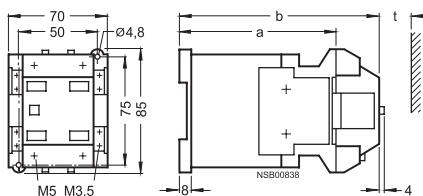

t = minimum clearance from insulated components: 15 mm (600 V and 750 V)

from grounded components: 30 mm (600 V and 750 V)

	a	b
DC operation	109	141
AC operation	68	100

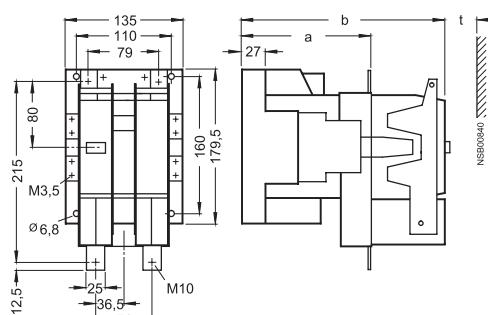3TC52 contactors
Size 8, AC and DC operation


t = minimum clearance from insulated components: 20 mm (600 V and 750 V)

from grounded components: 70 mm (600 V and 750 V)

	a	b
DC operation	147	232
AC operation	115	200



1) With box terminals for laminated copper bars (accessories).

3TF69 vacuum contactors

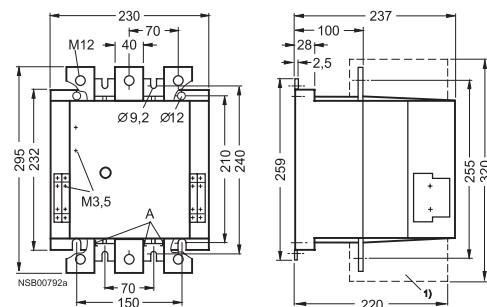

Detail


A = Contact erosion indicator for vacuum interrupter contacts

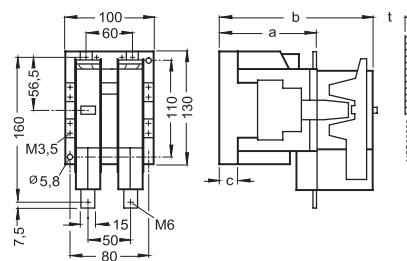3TC48 contactors
Size 4, AC and DC operation

t = minimum clearance from insulated components: 15 mm (600 V), 20 mm (750 V)

from grounded components: 35 mm (600 V), 55 mm (750 V)

	a	b	c
DC operation	112	180	21.5
AC operation	86	154	23.5

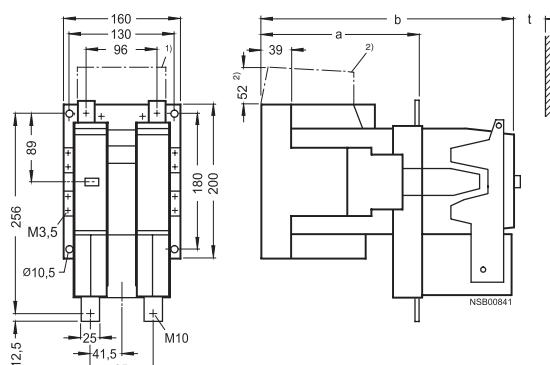3TC56 contactors
Size 12, AC and DC operation

t = minimum clearance from insulated components: 25 mm (600 V and 750 V)

from grounded components: 80 mm (600 V), 100 mm (750 V)

	a	b
DC operation	200	310
AC operation	141	251

2) DC operation only


Accessories for 3RT2 contactors

2


CONTACTORS AND ASSEMBLIES

Dimension drawings


Terminal cover for box terminals
for size S2,
3RT29 36-4EA2

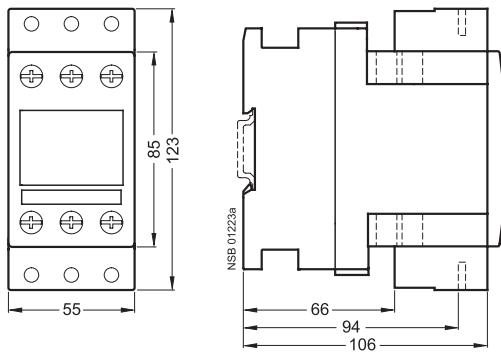


Terminal cover for box terminals
for size S3,
3RT19 46-4EA2

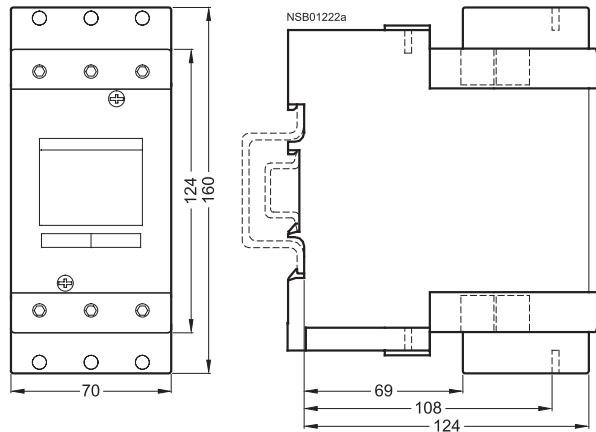

Terminal cover for cable lug and bar connection
for size S3,
3RT19 46-4EA1

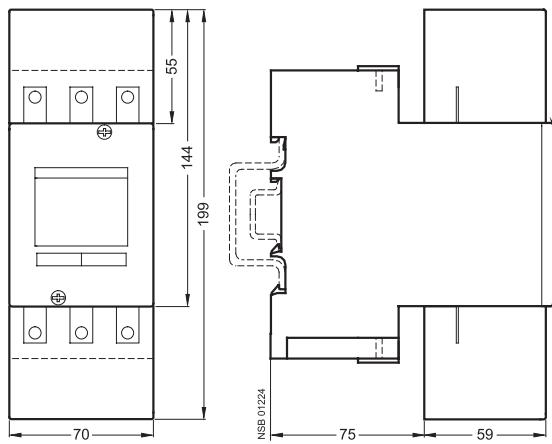

Auxiliary conductor terminal, 3-pole
3RT19 46-4F
Size S3
mounted on contactor

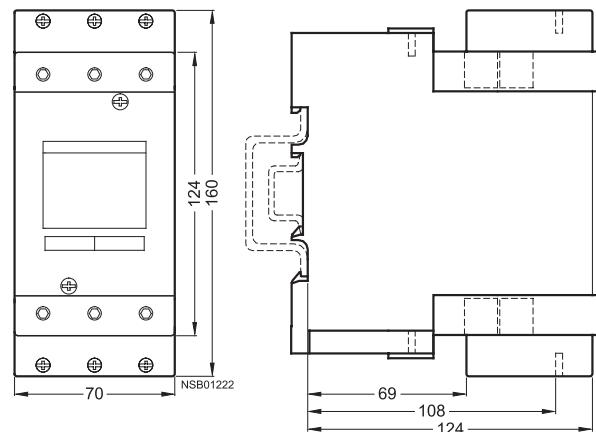


For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax




Accessories for 3RA1 contactor assemblies

Dimension drawings

3RA19.2-2A baseplates for reversing contactor assemblies

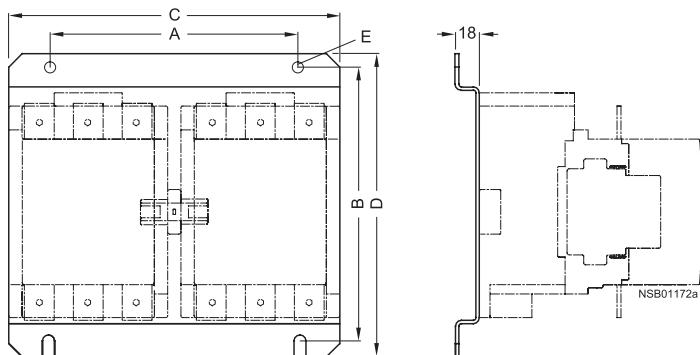

	A	B	C	D	E
S6	190	205	250	229	9
S10	240	249	300	275	11
S12	280	249	330	275	11

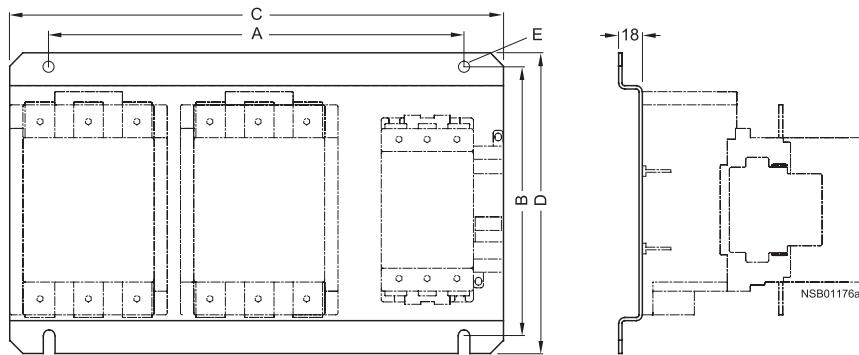3RA19.2-2E, 3RA19.2-2F
baseplates for star-delta assemblies

	A	B	C	D	E
S6-S6-S3	316	205	376	229	9
S6-S6-S6	343	205	403	229	9
S10-S10-S6	393	250	453	275	11
S10-S10-S10	423	250	483	275	11
S12-S12-S10	450	250	510	275	11
S12-S12-S12	465	250	525	275	11




For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax

3RH21 and 3RH24 control relays

Dimension drawings

3RH21 control relays



Size S00, with screw connections



Lateral clearance from
earthing parts = 6 mm

3RH24 latched control relays



Size S00



3RH21 coupling relay

Dimension drawings

Size S00, with screw connections,
with surge suppressor

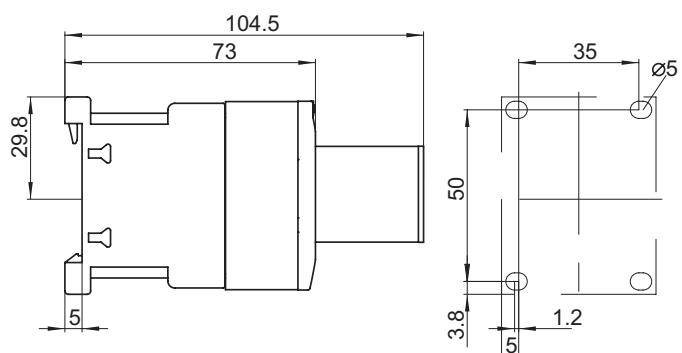

1) Surge suppressor
2) Drilling pattern
Deviating dimensions for
coupling relays with Spring-type
terminal connections
Height: 69.5 mm

For specific dimensions, 2D / 3D CAD files and technical data, please visit www.siemens.com/cax